

CATALOGUE  
*english*



**EIKON**





# EIKON

EIKON TACTIL

---

EIKON EVO

---

EIKON CHROME

---

EIKON TOTAL LOOK

---

# FOUR AESTHETIC DIMENSIONS.

Elegance, excellence, value: there's no such thing as a single idea of luxury. Luxury is a dimension with many interpretations, all in constant evolution. And if we're talking about energy, this dimension is Eikon.

Every concept of luxury finds its perfect expression in Eikon: technological, chic, sophisticated, essential.

Four product lines with different dimensions, finishing and functions, but sharing one common denominator: controlling energy superlatively.



# EIKON TACTIL



## THE FUTURE TAKES SHAPE.

A technological jewel as pure as a diamond and as light as a feather.

## TOUCH FUNCTION.

The lightest touch, and energy is under control.

## PROXIMITY SENSOR.

The electronic controls sense when you are near the device and switch it on, ready for use.

## PURE CRYSTAL.

A precious material, in 4 colours: white diamond, black diamond, pearl grey and aqua.



# LUMINOSI

BEVELLED CRYSTAL

---



Black diamond



White diamond




Aqua



Pearl grey

# EIKON EVO

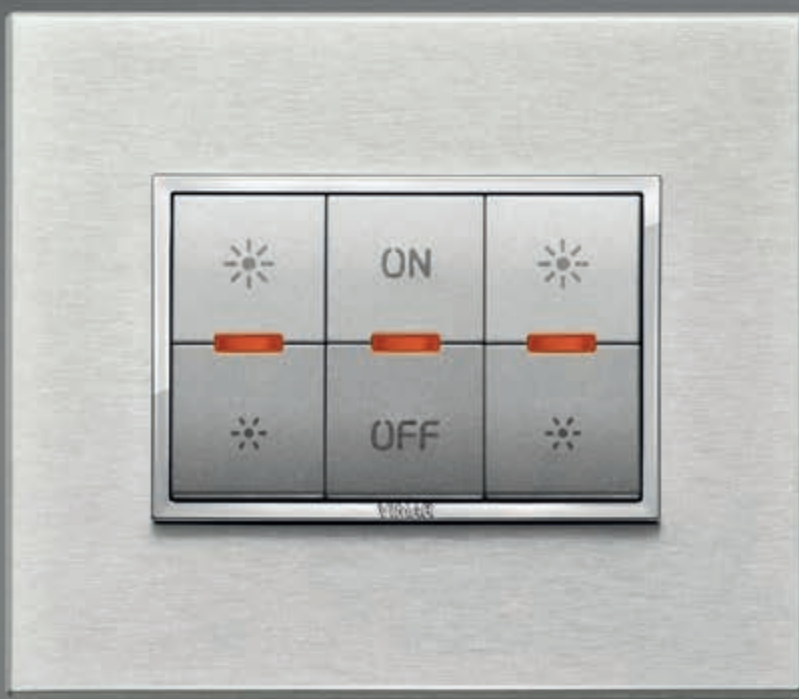

## LUXURY UNVEILED.

With a style and a technology that add unique, irresistible value to all your everyday gestures.

## ULTRA-SLIM PROFILE.

A lightweight, slim silhouette that stands out just a few millimetres from the wall, with axial buttons.

## ELEGANT GEOMETRIES.

Shapes that are designed to catch the eye, rigorous and elegant, in sizes that are unobtrusive on the wall.

## EXCLUSIVE MATERIALS.

Eight different precious materials, capturing the latest interior living trends.

## PRIMARI

ANODIZED ALUMINIUM



Brilliant aluminium



Next grey



Neutral bronze



Dark bronze



Lava grey

## ESCLUSIVI

REFINED ALUMINIUM



Silver



Titanium



Polished gold



Satin gold



Black sapphire



Total polished gold



Total satin gold

## RAFFINATI

NATURAL LEATHER



Cream



Tobacco

## SPECIALI

CORIAN®



Glacier ice

## SCOLPITI

CARVED STONE



Carrara white



Grey quartzite



Natural split slate

## NATURALI

SOLID WOOD



White oak



Italian walnut



Wengé

## ESSENZIALI

TOTAL ALUMINIUM AND CRYSTAL




Total white



Total black



Total white diamond



Total black diamond

## LUMINOSI

BEVELLED CRYSTAL



Silver ice



Bronze mirror



White diamond



Aqua



Pearl grey



Opal brown



Black diamond

# EIKON CHROME



## DAZZLING DETAILS.

A new definition of style where detail is supreme.

## CHROME FRAME.

Shiny and smooth, a distinctive feature surrounding buttons and controls.

## LINEAR OR ROUNDED?

Eikon Chrome responds to all needs with its Classic and Round designs.

## MATERIALS AND COLOURS.

Prestige also comes in the five selected materials and the many colour variants.

# BRIGHT

## VARNISHED METAL - CLASSIC



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic silver



Metallic Siena



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

## VARNISHED METAL - ROUND



Arctic white



Antique white



Metallic champagne



Metallic titanium



Metallic atlantic grey



Metallic silver



Metallic anthracite



Matt silver



Matt titanium



Matt anthracite

# REFINED

## REFINED METAL - CLASSIC



Satin gold



Satin nickel



Polished gold

## REFINED METAL - ROUND



Satin gold



Satin nickel



Polished gold



Satin chrome

# WOOD

## SOLID WOOD - CLASSIC



African wengé



White oak



Italian walnut

## SOLID WOOD - ROUND



American cherrywood



White oak



Italian walnut

# INOX

## STAINLESS STEEL - CLASSIC



Brushed inox

## STAINLESS STEEL - ROUND



Brushed inox

# GLASS

## CRYSTAL - CLASSIC



Black ice



White ice



Silver mirror

# EIKON TOTAL LOOK



HARMONY IN COORDINATING COLOURS.  
Three essential colours for cover plates, frames, buttons and controls.

THREE COLOURS.  
White, anthracite grey and Next silver: buttons and devices are fully colour-coordinated with the cover plates and frames.

TWO SHAPES.  
Rigorous profiles or sinuous lines? Each design has its own style.

UNIQUE MATERIAL.  
Metal, a precious functional and design choice.

# BRIGHT

VARNISHED METAL - CLASSIC

---



Matt anthracite



Arctic white



Matt silver

VARNISHED METAL - ROUND

---



Matt anthracite



Arctic white



Matt silver




## General features

### Versatile and modular solutions for an extensive installation

Control equipment and socket outlets how and where you want them: a wide range of devices with great installation versatility that meet major international standards. Thanks to the different modularity of the devices (from 1 to 3 modules), different installation standards (with 60,3 mm and 71 mm distance between centres and cover plates with 1 to 21 modules) and fixing the device to the mounting frame (inserting/removing) it is possible to design installation solutions with a high level of safety.

### Plack-clack hooking system

A Vimar patent that makes it quick and easy to fit the lighting point components (devices and mounting frames) to the cover plate. The plack-clack is a hooking system with an extra-strong mounting frame (with a metal core) and exceptional rigidity, simplifying the front-on fitting and removal of devices. The system makes it possible to work on the installation without removing the mounting frame from the wall. And the mounting frame is just 2 mm thick, so the cover plate sticks out far less from the wall helping to assure the desired "flush to the wall" installation.

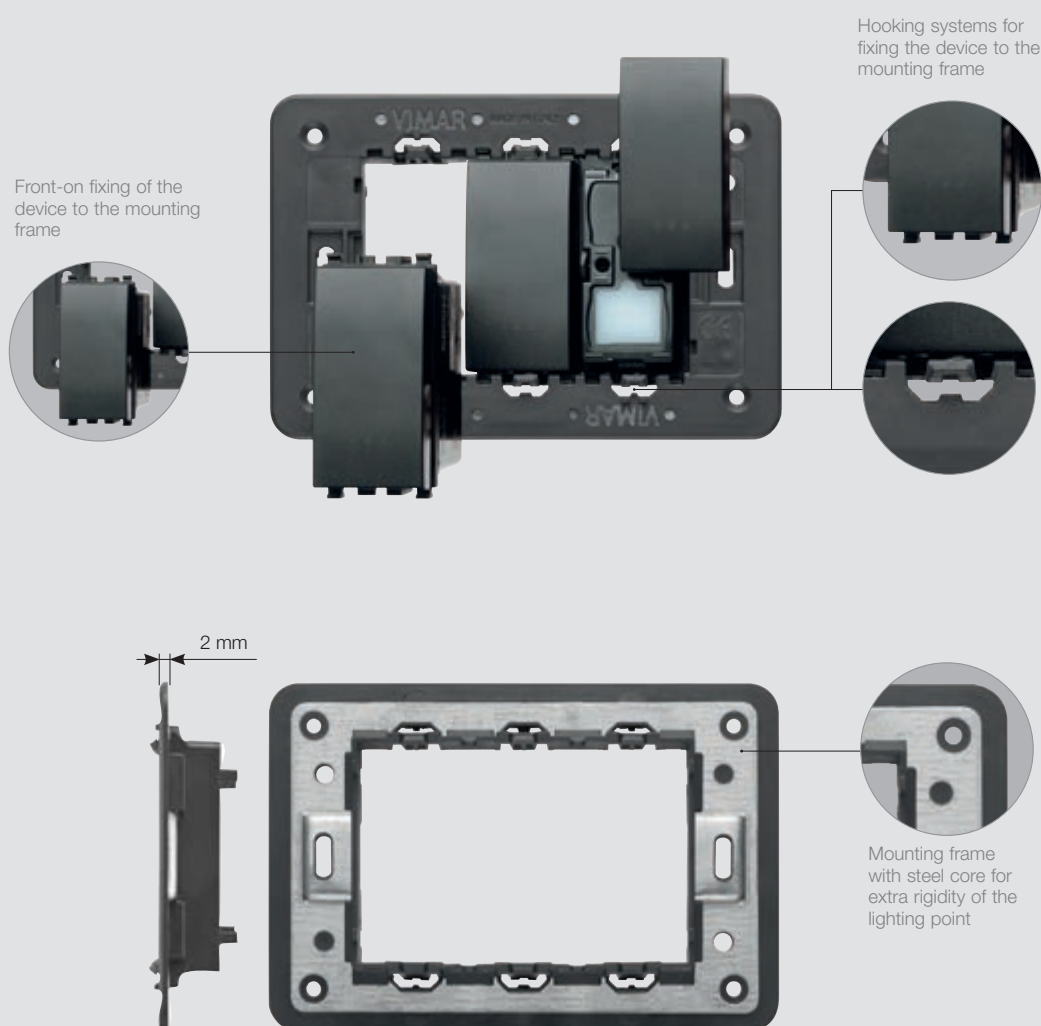




## General features

### Modular devices and cover plates


The modular device with from 1 to 3 modules lets you install multiple devices of different modularity in a single mounting frame, up to a composition of 21 modules for cover plates size 7+7+7. The mounting frame that installs the devices is equipped with interlocking teeth that provide strong and reliable fixing for each single device and allows perfect alignment between devices such as to create an orderly and visually pleasing stylistic effect.

The device can also be fixed front-on to the mounting frame, allowing work on the installation at any time without having to remove the mounting frame from the box.

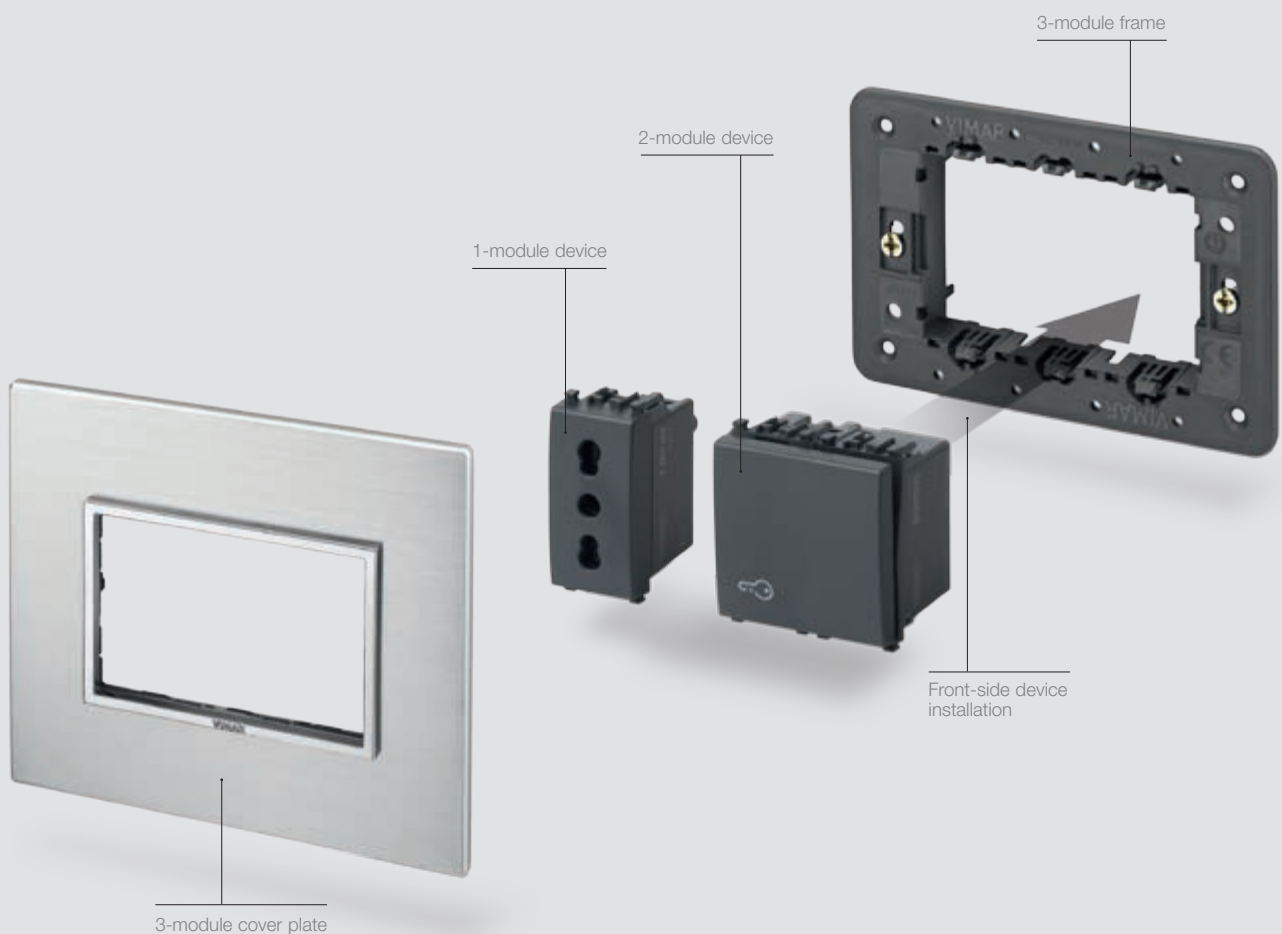


### Flexible installation


The images show how different pairs of devices from 1 to 3 modules can be installed in the same mounting frame.



3 x 1-module



1 x 1-module and 1 x 2-module



1 x 3-module

## General features


### Controls.

#### Intelligent and functional technologies for maximum comfort.

There are many different ways of activating a device: axial or rocker technology, swipe or touch controls, each characterises by high precision and silent technology. In addition, the ergonomics of the buttons accompanies and simplifies control gestures, while the backlighting allows constant and intuitive legibility of the functions associated with each control.


#### Different activation types to meet all application requirements.

Electronic, rocker, axial, infra-red, swipe or touch controls combine technological precision and aesthetic refinement. Movement of the controls by means of the buttons produces an imperceptible muted sound thanks to the Soft Action system, with a leaf-spring contact with a joint-pin mechanism that dampens the movements and electrical bounce, muting the sound and softening the movement.

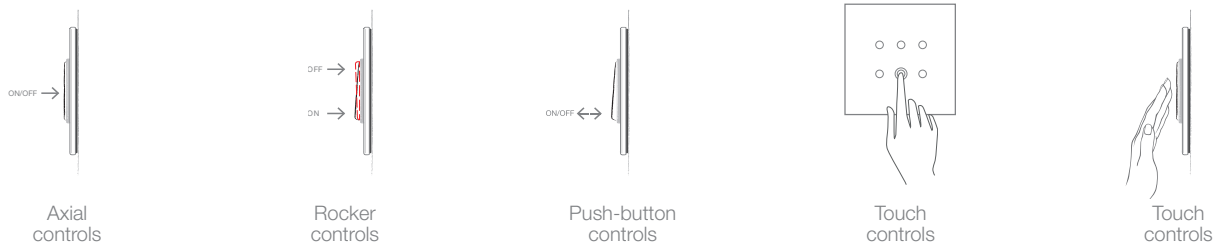

#### Soft action system: precision and silence.

The transfer of the movement from the button to the mechanism has been completely redesigned, with a worldwide-patented joint-pin system (1). Striking the button has been cushioned with co-moulded rubber elements (2). The spring geometry of the moving contact of the mechanism performs a natural cushioning function, reducing its electrical recoils and wear, also thanks to a large increase in the quantity of silver of the contacts.

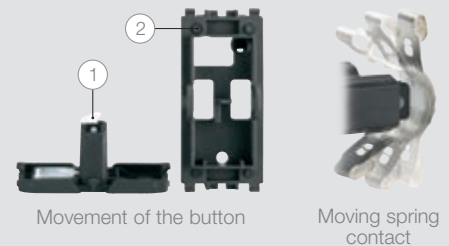


#### Eikon Tactil: electronic controls with proximity sensor.

Eikon Tactil is intelligence, it reads your mind: the proximity sensor brings home automation devices to life as soon as you come near the device, one step ahead of your movements. The controls light up, ready for your touch. Vimar technology makes these controls recognise any touch precisely and immediately, giving both visual and acoustic feedback.




#### Backlighting and customization.

The backlighting with different colours makes the controls visible even in the dark, while the symbols, either laser-engraved or customized on site, always give a clear indication of the various functions.

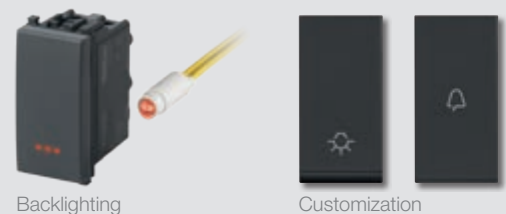

#### Button colour variant.

The Eikon controls come in three different colours: from light white to rigorous anthracite grey, passing through elegant Next silver. In the name of a technology that has never been separated from design.



## General features

### Wiring systems

There are two types of Vimar wiring systems to satisfy all installation standards. Depending on the type of cable (solid, stranded or flexible) and the cable cross-section ( from 0,5 to 2,5 mm<sup>2</sup> for signalling circuits and from 1,5 to 2,5 mm<sup>2</sup> for power circuits), there is a system used to secure the cable when fixing.

#### Wiring with screw clamps

The wiring with screw terminals consists of clamps with a curved metal plate that locks the cable via a crosshead screw and is ideal for flexible or semi-rigid cables with a cross-section of from 0,5 mm<sup>2</sup> to 2,5 mm<sup>2</sup>.


##### Screw clamps.

Composed of a curved metal plate that clamps the cable by means of a crosshead screw.




##### Use of cables with different cross-sections.

Wiring with a flexible or semi-rigid cable with a cross-section of from 0,5 mm<sup>2</sup> to 2,5 mm<sup>2</sup>.



##### Special housing for the signalling unit.

Special housing for the signalling unit, backlighting and visibility of controls even in the dark.




#### Smartfix rapid wiring

Smartfix rapid wiring is a Vimar patent with screwless terminals with separate terminals and bistable levers. The contact lever is used to fit and/or remove solid, stranded and flexible cables even with different sizes and the separate terminals allow the independent management of each cable, facilitating specific maintenance without compromising the hold on the already wired cables.


##### Smartfix patent.

The Smartfix patented terminals have AISI 301 steel spring contacts, with an innovative geometry and separate, independent terminals. This solution allows you both to independently manage cable inputs and wire cables of different types and cross-sections in the same terminal, ensuring they are fully secure.



##### Use of cables with different cross-sections.

With the separate spring terminals (Smartfix patent) you can wire cables with different cross-sections on the two inputs of the same terminal even at the same time. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm<sup>2</sup> and power circuit cables with cross-section 1,5-2,5 mm<sup>2</sup>.

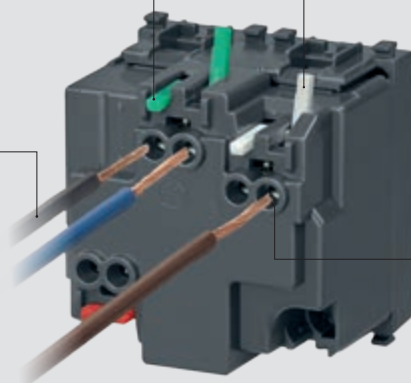


##### Bistable levers on the terminal.

A bistable lever works for each cable input; when raised, this opens a spring contact, and stranded or flexible cables can be inserted or removed very simply. Each one managing a specific cable input, the levers make maintenance easier without risking the secure fastening of the cables already wired.



##### Management of independent cable inputs.

With the separate spring terminals you can manage two cable inputs independently on the same terminal, wiring or removing cables of different types and cross-sections on one input, without risking the secure fastening of the cables on the other input.



## General features

### Devices for supervision.

The 10" multimedia Video Touch screen manages and controls everything that happens inside and outside the home, with high-definition images and coordinated, customised graphics. The web interface offers remote control via smartphone, PC and tablet. The 4,3" video touch screen offers complete control over all the video door entry and home automation functions.



10" multimedia video touch screen



4,3" Full Flat video touch screen

### Devices for control and power supply.

Control a light, activate a home automation scenario, manage different current loads, transmit and receive multimedia data: Vimar's residential series offers a range of functions that comply with this and numerous other energy uses. With special attention to safety, especially for the kids, and more specific requirements, including compliance with international standards.



Eikon Tactil home automation control



Home automation controls



Load control



USB, HDMI, RCA sockets



Data ports



Infrared switches

## General features

### Devices for energy efficiency and safety.

Each residential range of products contains devices able to guarantee personal safety, prevent damage to home appliances and maintain the integrity of the rooms in your home. These properties are integrated with a range of innovative functions that allow you to optimise energy consumption while guaranteeing well-being and comfort.



Methane gas detector



Touch timer-thermostat



Load control



Emergency fitting



Interlocked socket



Radio frequency controls

### Solutions for international use.

Wherever you are in the world, Eikon supplies sockets with different standards, modular controls and cover plates to help you design, organise and manage energy in compliance with the systems used in over 100 countries around the world.



Installation versatility



Standard foreign socket outlets



Different modules

# HOME AUTOMATION: ENERGY EFFICIENCY, SAFETY AND COMFORT WORK TOGETHER.

Inside a home automation building the various functions dialogue with each other comprehensively and continually, facilitating large as well as small daily actions and ensuring greater energy efficiency, safety, comfort and control.

Many solutions and all controlled from a single point. Centralized supervision via stylish touch screens to optimize energy consumption, check who is at your door, regulate the climate and lighting, move the roller shutters, activate or deactivate the burglar alarm system, view the filming of the video surveillance cameras or manage the sound system. Because we want you to experience your home in the best way possible.





### ENERGY EFFICIENCY

Monitor and view the energy consumed by single loads, efficiently control the temperature for greater energy awareness.



### SAFETY AND SECURITY

A simple and effective alarm system, devices for detecting people entering, a wide range of devices to keep the rooms under control.



### COMFORT

The desired temperature throughout the house, controlling and programming it for different rooms and home automation controls to create preset scenarios depending on your needs.



### CONTROL

All the functions in the dwelling can also be controlled locally by numerous devices, to personalize the room according to the needs of the moment.



# BUILDING AUTOMATION SYSTEM FOR EFFICIENCY, SAFETY AND SECURITY, COMFORT AND CONTROL OF BUILDINGS.

From lighting to access control, from monitoring consumption to dialogue with other devices in the structure, it can all be managed via Well-contact Plus. A unique system developed on the KNX standard that enables programming, coordinating and supervising all the functions in the building whether it be an office, hotel, shop or gym.







### ENERGY EFFICIENCY

Integration with the systems already present in the structure allows real benefits, avoids wasting energy and improves wellness.



### SAFETY AND SECURITY

Transponder reader to open the electrical lock and turn on the lights in the rooms only for authorized persons.



### COMFORT

KNX controls to automate all the functions of the building from the roller shutters to the lighting.



### CONTROL

Supervising and controlling a room or the entire building via stylish devices featuring intuitive icons.



## Mounting features for Eikon Tactil

### 3-module installation

#### Cover plates.

Large, square size, from 2 to 4 modules. In crystal and 4 colours: white diamond, aqua, pearl grey and black diamond.



#### Electronic controls.

1, 2 and 3 back-lit modules. The standard controls have amber backlighting when installed in a conventional electrical system. The backlighting can be programmed with RGB colours when mounted in a By-me or Well-contact Plus automation systems.




#### Mylar adhesive labels.

The controls can be customised using the Mylar adhesive labels with a range of symbols, all back-lightable.




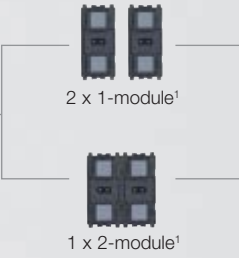


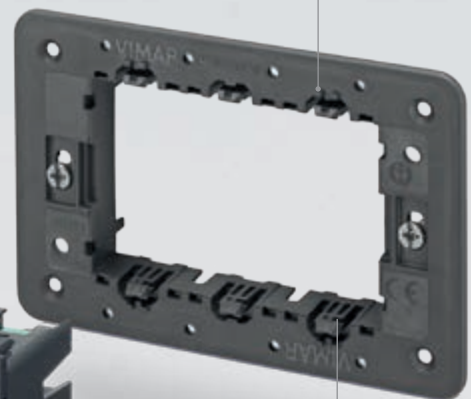






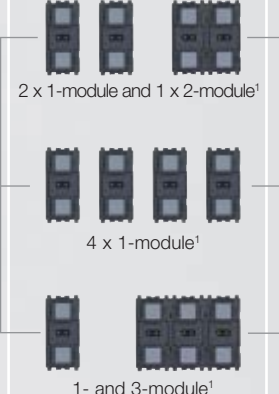

#### Ultra-slim support.

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.



#### Plack-clack system.

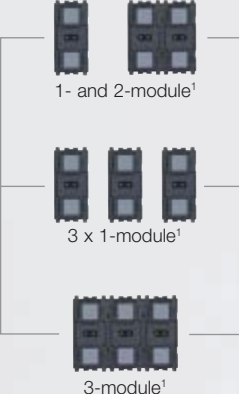The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.


Composition	Box	Frame	Device	Cover plate
 <p>2 modules</p>	 <p>Flush mounting</p>	 <p>2-module with/without screws or with claws</p>	 <p>2 x 1-module<sup>1</sup> 1 x 2-module<sup>1</sup></p>	 <p>2 modules</p>
 <p>3 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>1- and 2-module<sup>1</sup> 3 x 1-module<sup>1</sup> 3-module<sup>1</sup></p>	 <p>3 modules</p>
 <p>4 modules</p>	 <p>Flush mounting</p>	 <p>With screws</p>	 <p>2 x 1-module and 1 x 2-module<sup>1</sup> 4 x 1-module<sup>1</sup> 1- and 3-module<sup>1</sup></p>	 <p>4 modules</p>

\* For other combinations, see the installation types from page 98

<sup>1</sup> To customise with Mylar adhesive labels (21847)

## Mounting features for Eikon Evo

### 3-module installation

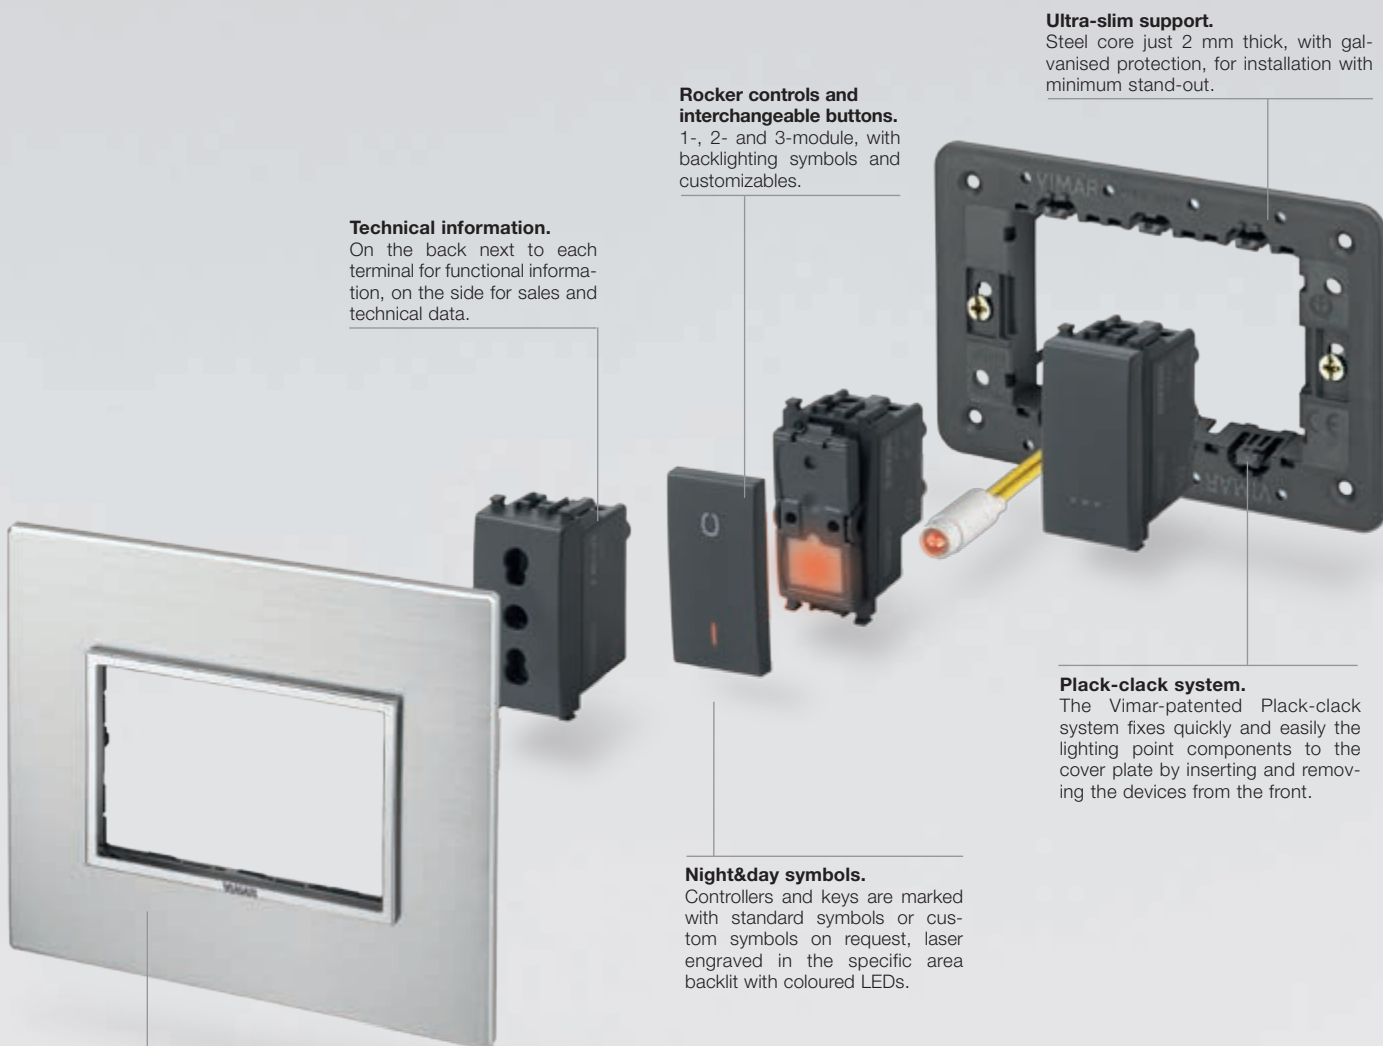

**Technical information.**  
On the back next to each terminal for functional information, on the side for sales and technical data.

**Rocker controls and interchangeable buttons.**  
1-, 2- and 3-module, with backlighting symbols and customizables.

**Ultra-slim support.**  
Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.

**Plack-clack system.**  
The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.


**Night&day symbols.**  
Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

**Cover plates.**  
Large, square size, from 2 to 7 and 4+4 modules. In 6 precious materials and a wide range of colours with flat frame with no shaping, symmetrical and elegant to make the most of the lighting device.

### SCREWLESS TERMINALS

For solid, stranded and flexible cables. Quick, easy and safe.

The quick-wiring terminals can hold rigid, semi-rigid and flexible cables, responding to all installation needs. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm<sup>2</sup> and power circuit cables with cross-section 1,5-2,5 mm<sup>2</sup>.

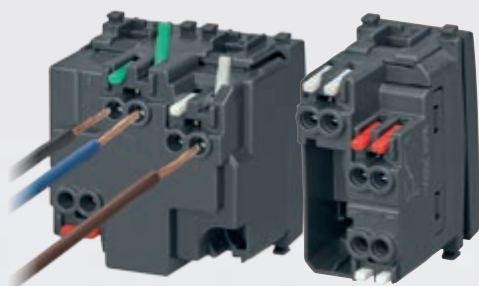

### SCREW TERMINALS

Ergonomic contacts.

The metal plate in the terminals is curved: a Vimar refinement allowing the wire to be held in place until clamped with the screw. Secure fastening is assured for both signal circuit cables with cross-section 0,5-2,5 mm<sup>2</sup> and power circuit cables with cross-section 1,5-2,5 mm<sup>2</sup>.



Composition	Box	Frame	Device	Cover plate
 <b>2 modules</b>	 Flush mounting ø 60 mm or 56x56 mm	 With/without screws	 2 x 1-module 1 x 2-module	 2 modules
 <b>From 3 to 7 modules</b>	 Flush mounting from 3 to 7 modules	 With screws	 3 x 1-module 1- and 2-module 1 x 3-module	 From 3 to 7 modules*
 <b>10" multimedia video touch</b>	 Semi-flush mounting			 Cover plate for multimedia video touch 10"
 <b>4,3" Full Flat touch screen</b>	 Flush mounting	 With screws	 4,3" Full Flat touch screen	 8 modules cover plate*
 <b>4,3" Full Flat video touch</b>			 2 x 1-module and 1 x 2-module 4 x 1-module	

\* For other combinations, see the installation types from page 99

## Mounting features for Eikon Evo

Installation with 71 mm distance between centres (German and French standard)

**Ultra-flat mounting frame with metal core.**

Just 2 mm thick, it guarantees strength, flexibility and electric insulation. The metal core has a galvanised, anti-oxidant coating and attaches devices quickly and easily. Wide range of installation possibilities because of the 71 mm between centres.

**Plack-clack system.**

The Vimar-patented Plack-clack system fixes quickly and easily the lighting point components to the cover plate by inserting and removing the devices from the front.

**Interchangeable buttons**  
1- and 2-module, with backlighting symbols and customizables.



**Technical information**




















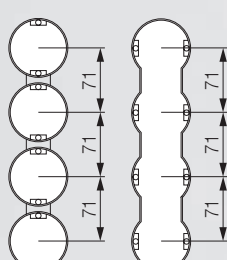
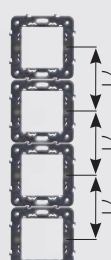


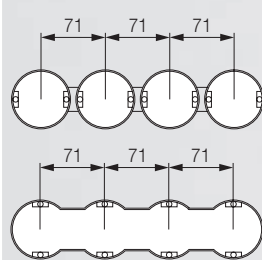
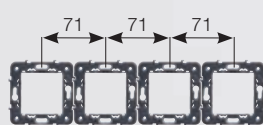


On the back next to each terminal for functional information, on the side for sales and technical data.



**Multi-module cover plates**


Wide range of cover plates, from 2+2 to 2+2+2+2 modules, for safe and functional vertical and horizontal installation for any country.



Composition	Box	Frame	Device	Cover plate
 <p>2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>2 x 2 modules</p>	 <p>2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>2 x 2 modules</p>	 <p>2+2 modules, horizontal installation</p>
 <p>2+2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>3 x 2 modules</p>	 <p>2+2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>3 x 2 modules</p>	 <p>2+2+2 modules, horizontal installation</p>
 <p>2+2+2+2 modules</p>		 <p>With/without screws with 71 mm between centres</p>	 <p>4 x 2 modules</p>	 <p>2+2+2+2 modules, vertical installation</p>
		 <p>With/without screws with 71 mm between centres</p>	 <p>4 x 2 modules</p>	 <p>2+2+2+2 modules, horizontal installation</p>

## Mounting features for Eikon Chrome and Eikon Total Look

### 3-module installation

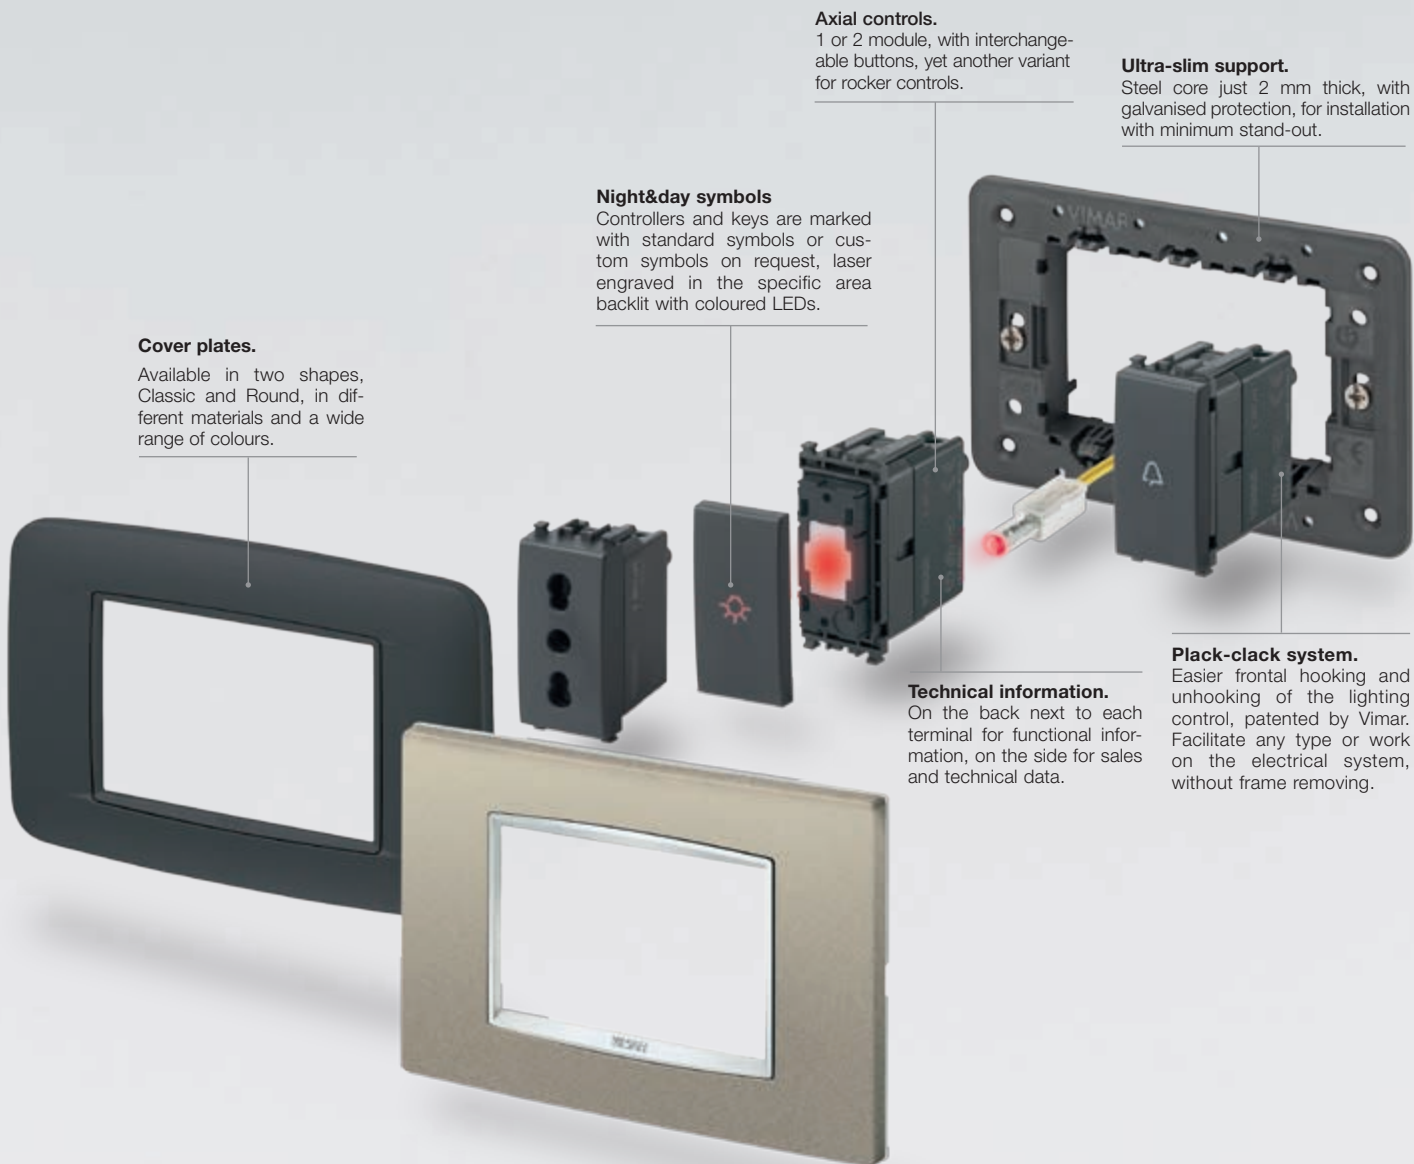

**Cover plates.**

Available in two shapes, Classic and Round, in different materials and a wide range of colours.

**Night&day symbols**

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.

**Axial controls.**

1 or 2 module, with interchangeable buttons, yet another variant for rocker controls.

**Ultra-slim support.**

Steel core just 2 mm thick, with galvanised protection, for installation with minimum stand-out.






































**Plack-clack system.**

Easier frontal hooking and unhooking of the lighting control, patented by Vimar. Facilitate any type or work on the electrical system, without frame removing.

**Technical information.**

On the back next to each terminal for functional information, on the side for sales and technical data.



Composition	Box	Frame	Device	Cover plate
 <b>Panel mounting</b>	 Panel mounting	 With screws	 1-module	 From 1 to 2 modules Classic or Round* (only for Eikon Total Look)
 <b>From 1 to 2 modules</b>	 Flush mounting   Surface mounting	 2-module with/without screws or with claws	 2 x 1-module   1 x 2-module	 From 1 to 2 modules Classic or Round*
 <b>For 2 central modules</b>	 Flush mounting	 With screws	 2 x 1-module   2-module	 2-central-module Classic or Round*
 <b>From 3 to 7 modules</b>	 Surface mounting	 With screws	 1 and 2-module   3 x 1-module   1 x 3-module	 From 3 to 7 modules Classic or Round*
 <b>8 modules</b>	 Flush mounting	 With screws	 Touch screen 4,3" "Energy"   2 x 1-module and 1 x 2-module   4 x 1-module	 8 modules Classic or Round*
 <b>Table mounting</b>	 Table box	 With screws	 1 and 3-module	 4 and 7 modules Classic or Round*

\* For other combinations, see the installation types from page 104

## Mounting features for Eikon British standard

### Modular devices mounting



**Cover plates**

Wide range of colours and combinations:  
 EIKON EVO  
 EIKON CHROME  
 EIKON TOTAL LOOK

**Technical information**

On the back next to each terminal for functional information, on the side for sales and technical data.



**Interchangeable buttons**

One or two modules, with backlit symbols and customizable.

**Customisation**

Controllers and keys are marked with standard symbols or custom symbols on request, laser engraved in the specific area backlit with coloured LEDs.



**Lowered frame.**

Stainless steel mounting frame with earth terminal, with lugs for an easy and fast installation of the devices from the front. Available also for 1 module with built-in blank module.

### Monobloc device (with built-in mounting frame)



**Cover plates**

For vertical and horizontal mounting

**Socket outlet**

With SICURY patented system to prevent accidental contacts.



**Monobloc device**

Built-in mounting frame.

**Fixing lugs**

Possibility of horizontal and vertical mounting of device.

**Signalling LED**

Signalling of power supply, with integrated signalling unit, perfectly visible by day and night.

**Matching possibility**



Joining possibility with minimum 25 mm of distance between boxes

Composition	Box	Frame	Device	Cover plate
<p><b>1 module, modular mounting (1-gang)</b></p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>	<p>1-module with screws M 3,5</p>	<p>1-gang switch, 1 module</p>	<p>From 1 to 2 modules*</p>
<p><b>2 modules, modular mounting (1-, 2-, 3-gang switch)</b></p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>	<p>2-module with screws M 3,5</p>	<p>3-gang switch, 2 modules 2 x 1-gang switches, 1 module 1-gang switch, 2 modules</p>	<p>From 1 to 2 modules*</p>
<p><b>monobloc device or 3 modules modular mounting</b></p>	<p>1-gang mounting box Fixing centres: 60,3 mm</p>	<p>3-module with screws M 3,5</p>	<p>Socket outlet monobloc device ON/OFF unit monobloc device 1 x 2-module + 1 x 1-module</p>	<p>monobloc horizontal mounting* monobloc vertical mounting* 3 modules*</p>
<p><b>monobloc device or 5 modules modular mounting</b></p>	<p>2-gang mounting box Fixing centres: 120,6 mm</p>	<p>5-module with screws M 3,5</p>	<p>2-gang switched socket outlets monobloc device 2 x 2-module + 1 x 1-module</p>	<p>5 modules*</p>

\* For other combinations, see the installation types from page 101 and 108

## Devices

### EIKON TACTIL

#### Blank modules



**21041**  
Blank module.  
Depth: 11 mm

#### Electronic devices



**21119**  
NO 6 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz.  
Depth: 42,5 mm



**21174**  
For  $\cos\phi$  0,6 2 A 230 V~ roller shutters laths adjustment.  
Depth: 42,5 mm



**21122**  
Electronic remote control, 2 push buttons for the remote control of a single or centralized control.  
Depth: 42,5 mm

#### 230 V~ 50 Hz dimmers



**21134**  
MASTER, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W.  
Depth: 42,5 mm

#### By-me - Electronic devices



**21520**  
4 programmable buttons for 2 single controls or scenes - 2 modules.  
Depth: 38 mm



**21540**  
6 programmable buttons for 3 single controls or scenes - 3 modules.  
Depth: 38 mm

#### Well-contact Plus - Electronic devices



**21840**  
4 independently programmable buttons for single controls or scenes, KNX standard - 2 modules. Depth: 38 mm




**21860**  
6 independently programmable buttons for single controls or scenes, KNX standard - 3 modules. Depth: 38 mm

#### Labels



**21847**  
8 sheets of stickers with symbols and words for Eikon Tactil devices

#### Well-contact Plus - Access control system



**21457**  
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card.  
Depth: 36,5 mm



**21666.70**  
Electronic plate for 21457, white diamond - 3 modules



**21666.71**  
Electronic plate for 21457, aqua - 3 modules



**21666.73**  
Electronic plate for 21457, pearl grey - 3 modules















**21666.76**  
Electronic plate for 21457, black diamond - 3 modules







## Devices

Grey	White	Next
------	-------	------

### Blank modules and cable outlets

 <p><b>20041</b> Blank module. Depth: 11 mm</p> <p><b>20044</b> Cable outlet. Depth: 16,6 mm</p>	 <p><b>20041.B</b> Blank module. Depth: 11 mm</p> <p><b>20044.B</b> Cable outlet. Depth: 16,6 mm</p>	 <p><b>20041.N</b> Blank module. Depth: 11 mm</p> <p><b>20044.N</b> Cable outlet. Depth: 16,6 mm</p>
 <p><b>20042</b> Blank module - 2 modules. Depth: 11 mm</p>	 <p><b>20042.B</b> Blank module - 2 modules. Depth: 11 mm</p>	 <p><b>20042.N</b> Blank module - 2 modules. Depth: 11 mm</p>
 <p><b>20046<sup>2</sup></b> Cable outlet + terminalbar 20 A. Depth: 22,1 mm</p> <p><b>20047<sup>2</sup></b> 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm</p>	 <p><b>20046.B<sup>2</sup></b> Cable outlet + terminalbar 20 A. Depth: 22,1 mm</p> <p><b>20047.B<sup>2</sup></b> 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm</p>	 <p><b>20046.N<sup>2</sup></b> Cable outlet + terminalbar 20 A. Depth: 22,1 mm</p> <p><b>20047.N<sup>2</sup></b> 45 A 1-gang cable outlet supplied with cover plate. Depth: 20 mm</p>
 <p><b>20049.L<sup>3</sup></b> 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm</p>	 <p><b>20049.L.B<sup>3</sup></b> 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm</p>	 <p><b>20049.L.N<sup>3</sup></b> 13 A, 1-gang, switched and fused connection unit. Depth: 20,4 mm</p>

### 1P 1-way switches 250 V~ (lightable<sup>°</sup>)



















 <p><b>20001</b> 16 AX. Depth: 25 mm</p> <p><b>20001.2</b> 16 AX - 2 modules. Depth: 25 mm</p>	 <p><b>20001.B</b> 16 AX. Depth: 25 mm</p> <p><b>20001.2.B</b> 16 AX - 2 modules. Depth: 25 mm</p>	 <p><b>20001.N</b> 16 AX. Depth: 25 mm</p> <p><b>20001.2.N</b> 16 AX - 2 modules. Depth: 25 mm</p>
 <p><b>20002</b> 20 AX. Depth: 25 mm</p> <p><b>20002.2</b> 20 AX - 2 modules. Depth: 25 mm</p> <p><b>20003</b> 20 AX, 3-gang - 2 modules. Depth: 25 mm</p>	 <p><b>20002.B</b> 20 AX. Depth: 25 mm</p> <p><b>20002.2.B</b> 20 AX - 2 modules. Depth: 25 mm</p> <p><b>20003.B</b> 20 AX, 3-gang - 2 modules. Depth: 25 mm</p>	 <p><b>20002.N</b> 20 AX. Depth: 25 mm</p> <p><b>20002.2.N</b> 20 AX - 2 modules. Depth: 25 mm</p> <p><b>20003.N</b> 20 AX, 3-gang - 2 modules. Depth: 25 mm</p>

<sup>°</sup> Lamps and signalling units, page 75

<sup>2</sup> Conform to BS 5733

<sup>3</sup> Conform to BS 1363-4

## Devices

Grey	White	Next
<b>1P 1-way switches 250 V~, screwless terminals (lightable°)</b>		
 <p><b>20001.FX</b> 16 AX. Depth: 26,7 mm</p> <p><b>20001.FX.2</b> 16 AX - 2 modules. Depth: 26,7 mm</p>	 <p><b>20001.FX.B</b> 16 AX. Depth: 26,7 mm</p> <p><b>20001.FX.2.B</b> 16 AX - 2 modules. Depth: 26,7 mm</p>	 <p><b>20001.FX.N</b> 16 AX. Depth: 26,7 mm</p> <p><b>20001.FX.2.N</b> 16 AX - 2 modules. Depth: 26,7 mm</p>
<b>Axial 1P 1-way switches 250 V~ (lightable°)</b>		
 <p><b>20101</b> 16 AX. Depth: 34,5 mm</p> <p><b>20101.2</b> 16 AX - 2 modules. Depth: 34,5 mm</p>	 <p><b>20101.B</b> 16 AX. Depth: 34,5 mm</p> <p><b>20101.2.B</b> 16 AX - 2 modules. Depth: 34,5 mm</p>	 <p><b>20101.N</b> 16 AX. Depth: 34,5 mm</p> <p><b>20101.2.N</b> 16 AX - 2 modules. Depth: 34,5 mm</p>
<b>2P 1-way switches 250 V~ (lightable°)</b>		
 <p><b>20015</b> 16 AX. Depth: 25 mm</p> <p><b>20015.2</b> 16 AX - 2 modules. Depth: 25 mm</p>	 <p><b>20015.B</b> 16 AX. Depth: 25 mm</p> <p><b>20015.2.B</b> 16 AX - 2 modules. Depth: 25 mm</p>	 <p><b>20015.N</b> 16 AX. Depth: 25 mm</p> <p><b>20015.2.N</b> 16 AX - 2 modules. Depth: 25 mm</p>
<b>2P 1-way switches 250 V~, screwless terminals (lightable°)</b>		
 <p><b>20015.FX</b> 16 AX. Depth: 26,7 mm</p> <p><b>20015.FX.2</b> 16 AX - 2 modules. Depth: 26,7 mm</p>	 <p><b>20015.FX.B</b> 16 AX. Depth: 26,7 mm</p> <p><b>20015.FX.2.B</b> 16 AX - 2 modules. Depth: 26,7 mm</p>	 <p><b>20015.FX.N</b> 16 AX. Depth: 26,7 mm</p> <p><b>20015.FX.2.N</b> 16 AX - 2 modules. Depth: 26,7 mm</p>
<b>2P 1-way switches 250 V~ (lightable°)</b>		
 <p><b>20016</b> 20 AX. Depth: 26 mm</p> <p><b>20016.2</b> 20 AX, ON/OFF - 2 modules. Depth: 26 mm</p> <p><b>20016.WH</b> 20 AX, Water/Heater. Depth: 26 mm</p>	 <p><b>20016.B</b> 20 AX. Depth: 26 mm</p> <p><b>20016.2.B</b> 20 AX, ON/OFF - 2 modules. Depth: 26 mm</p> <p><b>20016.WH.B</b> 20 AX, Water/Heater. Depth: 26 mm</p>	 <p><b>20016.N</b> 20 AX. Depth: 26 mm</p> <p><b>20016.2.N</b> 20 AX, ON/OFF - 2 modules. Depth: 26 mm</p> <p><b>20016.WH.N</b> 20 AX, Water/Heater. Depth: 26 mm</p>
 <p><b>20016.2.WH</b> 20 AX, Water/Heater - 2 modules. Depth: 26 mm</p>	 <p><b>20016.2.WH.B</b> 20 AX, Water/Heater - 2 modules. Depth: 26 mm</p>	 <p><b>20016.2.WH.N</b> 20 AX, Water/Heater - 2 modules. Depth: 26 mm</p>



## Devices

Grey	White	Next
------	-------	------

### 2P 1-way switches 250 V~ (lightable°)



**20017**  
32 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20017.WH**  
32 A, 1-gang, Water/Heater.  
Depth: 22,5 mm



**20017.B**  
32 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20017.WH.B**  
32 A, 1-gang, Water/Heater.  
Depth: 22,5 mm



**20017.N**  
32 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20017.WH.N**  
32 A, 1-gang, Water/Heater.  
Depth: 22,5 mm



**20018**  
45 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20018.CK**  
45 A, 1-gang, cooker unit.  
Depth: 22,5 mm



**20018.B**  
45 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20018.CK.B**  
45 A, 1-gang, cooker unit.  
Depth: 22,5 mm



**20018.N**  
45 A, 1-gang, ON/OFF.  
Depth: 22,5 mm



**20018.CK.N**  
45 A, 1-gang, cooker unit.  
Depth: 22,5 mm



**20019**  
45 A, 1-gang, ON/OFF  
for 2-gang boxes.  
Depth: 22,5 mm



**20019.CK**  
45 A, 1-gang, cooker  
unit for 2-gang boxes.  
Depth: 22,5 mm



**20019.B**  
45 A, 1-gang, ON/OFF  
for 2-gang boxes.  
Depth: 22,5 mm



**20019.CK.B**  
45 A, 1-gang, cooker  
unit for 2-gang boxes.  
Depth: 22,5 mm



**20019.N**  
45 A, 1-gang, ON/OFF  
for 2-gang boxes.  
Depth: 22,5 mm



**20019.CK.N**  
45 A, 1-gang, cooker  
unit for 2-gang boxes.  
Depth: 22,5 mm

### Badge switch (lightable°)



**20466**  
Badge switch.  
Depth: 22,1 mm



**20466.B**  
Badge switch.  
Depth: 22,1 mm



**20466.N**  
Badge switch.  
Depth: 22,1 mm

### 1P 2-way switches 250 V~ (lightable°)



**20005**  
16 AX.  
Depth: 25 mm



**20005.2**  
16 AX  
- 2 modules.  
Depth: 25 mm



**20005.B**  
16 AX.  
Depth: 25 mm



**20005.2.B**  
16 AX  
- 2 modules.  
Depth: 25 mm





















**20005.N**  
16 AX.  
Depth: 25 mm



**20005.2.N**  
16 AX  
- 2 modules.  
Depth: 25 mm

° Lamps and signalling units, page 75

## Devices

Grey	White	Next
<b>1P 2-way switches 250 V~ (lightable°)</b>		
 <b>20006</b> 20 AX. Depth: 25 mm <b>20006.2</b> 20 AX, - 2 modules. Depth: 25 mm	 <b>20006.B</b> 20 AX. Depth: 25 mm <b>20006.2.B</b> 20 AX, - 2 modules. Depth: 25 mm	 <b>20006.N</b> 20 AX. Depth: 25 mm <b>20006.2.N</b> 20 AX, - 2 modules. Depth: 25 mm
<b>1P 2-way switches 250 V~, screwless terminals (lightable°)</b>		
 <b>20005.FX</b> 16 AX. Depth: 26,7 mm <b>20005.FX.2</b> 16 AX, - 2 modules. Depth: 26,7 mm	 <b>20005.FX.B</b> 16 AX. Depth: 26,7 mm <b>20005.FX.2.B</b> 16 AX, - 2 modules. Depth: 26,7 mm	 <b>20005.FX.N</b> 16 AX. Depth: 26,7 mm <b>20005.FX.2.N</b> 16 AX, - 2 modules. Depth: 26,7 mm
<b>1P 2-way switches 250 V~</b>		
 <b>20007</b> 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	 <b>20007.B</b> 20 AX, 3-gang - 2 modules. Depth: 32,6 mm	 <b>20007.N</b> 20 AX, 3-gang - 2 modules. Depth: 32,6 mm
<b>Axial 1P 2-way switches 250 V~ (lightable°)</b>		
 <b>20105</b> 16 AX. Depth: 34,5 mm <b>20105.2</b> 16 AX, - 2 modules. Depth: 34,5 mm	 <b>20105.B</b> 16 AX. Depth: 34,5 mm <b>20105.2.B</b> 16 AX, - 2 modules. Depth: 34,5 mm	 <b>20105.N</b> 16 AX. Depth: 34,5 mm <b>20105.2.N</b> 16 AX, - 2 modules. Depth: 34,5 mm
<b>1P reversing switches 250 V~ (lightable°)</b>		
 <b>20013</b> 16 AX. Depth: 25 mm <b>20013.2</b> 16 AX, - 2 modules. Depth: 25 mm	 <b>20013.B</b> 16 AX. Depth: 25 mm <b>20013.2.B</b> 16 AX, - 2 modules. Depth: 25 mm	 <b>20013.N</b> 16 AX. Depth: 25 mm <b>20013.2.N</b> 16 AX, - 2 modules. Depth: 25 mm
<b>1P reversing switches 250 V~, screwless terminals (lightable°)</b>		
 <b>20013.FX</b> 16 AX. Depth: 27,7 mm <b>20013.FX.2</b> 16 AX, - 2 modules. Depth: 26,7 mm	 <b>20013.FX.B</b> 16 AX. Depth: 27,7 mm <b>20013.FX.2.B</b> 16 AX, - 2 modules. Depth: 26,7 mm	 <b>20013.FX.N</b> 16 AX. Depth: 27,7 mm <b>20013.FX.2.N</b> 16 AX, - 2 modules. Depth: 26,7 mm



## Devices

Grey	White	Next
------	-------	------

### Axial 1P reversing switches 250 V~ (lightable°)



**20113**  
16 AX.  
Depth: 34,5 mm

**20113.2**  
16 AX  
- 2 modules.  
Depth: 34,5 mm



**20113.B**  
16 AX.  
Depth: 34,5 mm

**20113.2.B**  
16 AX  
- 2 modules.  
Depth: 34,5 mm



**20113.N**  
16 AX.  
Depth: 34,5 mm

**20113.2.N**  
16 AX  
- 2 modules.  
Depth: 34,5 mm

### 1P NO 10 A push buttons 250 V~ (lightable°)



**20008**  
10 A.  
Depth: 25 mm

**20008.2**  
10 A  
- 2 modules.  
Depth: 25 mm



**20008.B**  
10 A.  
Depth: 25 mm

**20008.2.B**  
10 A  
- 2 modules.  
Depth: 25 mm



**20008.N**  
10 A.  
Depth: 25 mm

**20008.2.N**  
10 A  
- 2 modules.  
Depth: 25 mm



**20008.2.C**  
Bell symbol  
- 2 modules.  
Depth: 25 mm

**20008.2.L**  
Light symbol  
- 2 modules.  
Depth: 25 mm



**20008.2.C.B**  
Bell symbol  
- 2 modules.  
Depth: 25 mm

**20008.2.L.B**  
Light symbol  
- 2 modules.  
Depth: 25 mm



**20008.2.C.N**  
Bell symbol  
- 2 modules.  
Depth: 25 mm

**20008.2.L.N**  
Light symbol  
- 2 modules.  
Depth: 25 mm

### 1P NO 10 A push buttons 250 V~, screwless terminals (lightable°)



**20008.FX**  
10 A.  
Depth: 26,7 mm

**20008.FX.2**  
10 A  
- 2 modules.  
Depth: 26,7 mm



**20008.FX.B**  
10 A.  
Depth: 26,7 mm

**20008.FX.2.B**  
10 A  
- 2 modules.  
Depth: 26,7 mm



**20008.FX.N**  
10 A.  
Depth: 26,7 mm

**20008.FX.2.N**  
10 A  
- 2 modules.  
Depth: 26,7 mm

### Axial 1P NO 10 A push buttons 250 V~ (lightable°)



**20108**  
10 A.  
Depth: 34,5 mm

**20108.2**  
10 A  
- 2 modules.  
Depth: 34,5 mm



**20108.B**  
10 A.  
Depth: 34,5 mm

**20108.2.B**  
10 A  
- 2 modules.  
Depth: 34,5 mm



**20108.N**  
10 A.  
Depth: 34,5 mm

**20108.2.N**  
10 A  
- 2 modules.  
Depth: 34,5 mm

### 1P NC 10 A push button 250 V~ (lightable°)



**20010**  
10 A.  
Depth: 25 mm



**20010.B**  
10 A.  
Depth: 25 mm



**20010.N**  
10 A.  
Depth: 25 mm

## Devices

Grey	White	Next
------	-------	------

### Lightable° mechanisms 250 V~ (common devices for the three versions)

<b>20001.0</b> 1P 16 AX 1-way switch. Depth: 25 mm	<b>20015.0</b> 2P 16 AX 1-way switch. Depth: 25 mm	<b>20005.0</b> 1P 16 AX 2-way switch. Depth: 25 mm	<b>20013.0</b> 1P 16 AX reversing switch. Depth: 25 mm	<b>20008.0</b> 1P NO 10 A push button. Depth: 25 mm	<b>20010.0</b> 1P NC 10 A push button. Depth: 25 mm	<b>20002.0</b> 1P 20 AX 1-way switch. Depth: 25 mm	<b>20016.0</b> 2P 20 AX 1-way switch. Depth: 25 mm	<b>20006.0</b> 1P 20 AX 2-way switch. Depth: 25 mm

### Lightable° mechanisms 250 V~, screwless terminals (common devices for the three versions)

<b>20001.FX.0</b> 1P 16 AX 1-way switch. Depth: 26,7 mm	<b>20015.FX.0</b> 2P 16 AX 1-way switch. Depth: 26,7 mm	<b>20005.FX.0</b> 1P 16 AX 2-way switch. Depth: 26,7 mm	<b>20013.FX.0</b> 1P 16 AX reversing switch. Depth: 26,7 mm	<b>20008.FX.0</b> 1P NO 10 A push button. Depth: 26,7 mm

### 1-module interchangeable buttons (lightable°)

<b>20021</b> No symbol	<b>20026</b> With diffuser	<b>20026.DND</b> Do Not Disturb with diffuser	<b>20026.PLS</b> Please Clean with diffuser	<b>20021.B</b> No symbol	<b>20026.B</b> With diffuser	<b>20026.DND.B</b> Do Not Disturb with diffuser	<b>20026.PLS.B</b> Please Clean with diffuser	<b>20021.N</b> No symbol	<b>20026.N</b> With diffuser	<b>20026.DND.N</b> Do Not Disturb with diffuser	<b>20026.PLS.N</b> Please Clean with diffuser
<b>20031</b> Customizable	<b>20021.C</b> Bell symbol	<b>20021.L</b> Light symbol	<b>20021.P</b> Key symbol	<b>20031.B</b> Customizable	<b>20021.C.B</b> Bell symbol	<b>20021.L.B</b> Light symbol	<b>20021.P.B</b> Key symbol	<b>20031.N</b> Customizable	<b>20021.C.N</b> Bell symbol	<b>20021.L.N</b> Light symbol	<b>20021.P.N</b> Key symbol
<b>20021.99</b> O I symbols for 2P switches	<b>20031.PS</b> 'Press' marked	<b>20021.99.B</b> O I symbols for 2P switches	<b>20031.PS.B</b> 'Press' marked	<b>20021.99.N</b> O I symbols for 2P switches	<b>20031.PS.N</b> 'Press' marked						

### 1-module interchangeable buttons for axial controls (lightable°)

<b>20131</b> No symbol	<b>20131.C</b> Bell symbol	<b>20131.L</b> Light symbol	<b>20131.B</b> No symbol	<b>20131.C.B</b> Bell symbol	<b>20131.L.B</b> Light symbol	<b>20131.N</b> No symbol	<b>20131.C.N</b> Bell symbol	<b>20131.L.N</b> Light symbol
<b>20131.P</b> Key symbol	<b>20131.0</b> Customizable	<b>20131.P.B</b> Key symbol	<b>20131.0.B</b> Customizable	<b>20131.P.N</b> Key symbol	<b>20131.0.N</b> Customizable			
















## Devices

Grey	White	Next
------	-------	------











### 2-module interchangeable buttons (lightable°)

 <b>20022</b> No symbol	 <b>20027</b> With diffuser	 <b>20032</b> Customizable	 <b>20022.B</b> No symbol	 <b>20027.B</b> With diffuser	 <b>20032.B</b> Customizable	 <b>20022.N</b> No symbol	 <b>20027.N</b> With diffuser	 <b>20032.N</b> Customizable
 <b>20022.C</b> Bell symbol	 <b>20022.L</b> Light symbol	 <b>20022.P</b> Key symbol	 <b>20022.C.B</b> Bell symbol	 <b>20022.L.B</b> Light symbol	 <b>20022.P.B</b> Key symbol	 <b>20022.C.N</b> Bell symbol	 <b>20022.L.N</b> Light symbol	 <b>20022.P.N</b> Key symbol
 <b>20022.99</b> O I symbols for 2P switches	 <b>20032.PS</b> 'Press' marked		 <b>20022.99.B</b> O I symbols for 2P switches	 <b>20032.PS.B</b> 'Press' marked		 <b>20022.99.N</b> O I symbols for 2P switches	 <b>20032.PS.N</b> 'Press' marked	

### 2-module interchangeable buttons for axial controls (lightable°)

 <b>20132</b> No symbol	 <b>20132.C</b> Bell symbol	 <b>20132.L</b> Light symbol	 <b>20132.B</b> No symbol	 <b>20132.C.B</b> Bell symbol	 <b>20132.L.B</b> Light symbol	 <b>20132.N</b> No symbol	 <b>20132.C.N</b> Bell symbol	 <b>20132.L.N</b> Light symbol
 <b>20132.P</b> Key symbol	 <b>20132.O</b> Customizable		 <b>20132.P.B</b> Key symbol	 <b>20132.O.B</b> Customizable		 <b>20132.P.N</b> Key symbol	 <b>20132.O.N</b> Customizable	

### 3-module interchangeable buttons (lightable°)

 <b>20023</b> No symbol	 <b>20028</b> With diffuser	 <b>20023.B</b> No symbol	 <b>20028.B</b> With diffuser	 <b>20023.N</b> No symbol	 <b>20028.N</b> With diffuser
 <b>20033</b> Customizable	 <b>20023.C</b> Bell symbol	 <b>20033.B</b> Customizable	 <b>20023.C.B</b> Bell symbol	 <b>20033.N</b> Customizable	 <b>20023.C.N</b> Bell symbol

## Devices

Grey	White	Next
------	-------	------

### 1P special switches 250 V~



**20050**  
NO 10 A, with  
lightable name-  
plate - 2 modules.  
Depth: 26,5 mm



**20052**  
NO 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20053**  
NC 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20050.B**  
NO 10 A, with  
lightable name-  
plate - 2 modules.  
Depth: 26,5 mm



**20052.B**  
NO 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20053.B**  
NC 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20050.N**  
NO 10 A, with  
lightable name-  
plate - 2 modules.  
Depth: 26,5 mm



**20052.N**  
NO 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20053.N**  
NC 10 A  
cord-  
operated.  
Depth:  
25,5 mm



**20097**  
NO 10 A 230 V~, for hotel  
"Do Not Disturb" and "Please  
Clean" lightable - 2 modules.  
Depth: 29 mm

### Additional 1P switches 250 V~



**20056.33**  
10 A, NO +  
NC-contact,  
OFF symbol.  
Depth:  
29,5 mm



**20056.34**  
10 A, NO +  
NC-contact,  
ON symbol.  
Depth:  
29,5 mm



**20058**  
Two 10 A NO+NC  
independent contacts,  
OFF/ON symbols.  
Depth: 29,5 mm



**20056.33.B**  
10 A, NO +  
NC-contact,  
OFF symbol.  
Depth:  
29,5 mm



**20056.34.B**  
10 A, NO +  
NC-contact,  
ON symbol.  
Depth:  
29,5 mm



**20058.B**  
Two 10 A NO+NC  
independent contacts,  
OFF/ON symbols.  
Depth: 29,5 mm



**20056.33.N**  
10 A, NO +  
NC-contact,  
OFF symbol.  
Depth:  
29,5 mm



**20056.34.N**  
10 A, NO +  
NC-contact,  
ON symbol.  
Depth:  
29,5 mm



**20058.N**  
Two 10 A NO+NC  
independent contacts,  
OFF/ON symbols.  
Depth: 29,5 mm

### 1P push buttons 250 V~



**20066**  
Two NO 10 A,  
independents.  
Depth: 29,5 mm



**20066.B**  
Two NO 10 A,  
independents.  
Depth: 29,5 mm



**20066.N**  
Two NO 10 A,  
independents.  
Depth: 29,5 mm

### 1P NO 10 A push buttons 250 V~ with indicator (for signalling units\*)



**20068.B**  
White diffuser.  
Depth: 29 mm



**Δ 20068.V**  
Green diffuser.  
Depth: 29 mm



**20068.B.B**  
White diffuser.  
Depth: 29 mm



**Δ 20068.R.B**  
Red diffuser.  
Depth: 29 mm



**Δ 20068.V.B**  
Green diffuser.  
Depth: 29 mm



**20068.B.N**  
White diffuser.  
Depth: 29 mm

### Switches 250 V~



**20060**  
2P 10 AX  
2-way switch,  
OFF-central.  
Depth: 34 mm



**20062**  
2 1P NO 10 A  
push buttons,  
interlocked.  
Depth: 29,5 mm



**20060.B**  
2P 10 AX  
2-way switch,  
OFF-central.  
Depth: 34 mm



**20062.B**  
2 1P NO 10 A  
push buttons,  
interlocked.  
Depth: 29,5 mm



**20060.N**  
2P 10 AX  
2-way switch,  
OFF-central.  
Depth: 34 mm



**20062.N**  
2 1P NO 10 A  
push buttons,  
interlocked.  
Depth: 29,5 mm

## Devices

Grey	White	Next
------	-------	------

### 2P key-operated switches 250 V~ (add .CU to the basic code for switches with 000 unified key)



**20082**  
16 AX 1-way switch,  
key removable in  
"O" (OFF) position.  
Depth: 33,5 mm

**20083**  
16 AX 1-way switch,  
key removable in  
both positions.  
Depth: 33,5 mm



**20082.B**  
16 AX 1-way switch,  
key removable in  
"O" (OFF) position.  
Depth: 33,5 mm

**20083.B**  
16 AX 1-way switch,  
key removable in  
both positions.  
Depth: 33,5 mm



**20082.N**  
16 AX 1-way switch,  
key removable in  
"O" (OFF) position.  
Depth: 33,5 mm

**20083.N**  
16 AX 1-way switch,  
key removable in  
both positions.  
Depth: 33,5 mm



**20086**  
NO 16 A push button,  
key removable in "O"  
position.  
Depth: 33,5 mm



**20086.B**  
NO 16 A push button,  
key removable in "O"  
position.  
Depth: 33,5 mm



**20086.N**  
NO 16 A push button,  
key removable in "O"  
position.  
Depth: 33,5 mm

### Dimmers\*\*



**▲ 20135.1**  
MASTER,  
universal  
**Δ 20135**  
As above  
**20135.120**  
As above,  
120 V~.  
Depth: 41,5 mm

**▲ 20136.1**  
MASTER,  
universal, with  
potentiometer  
**Δ 20136**  
As above  
**20136.120**  
As above,  
120 V~.  
Depth: 41,5 mm

**20137**  
SLAVE,  
universal  
**20137.120**  
As above,  
120 V~.  
Depth: 41,5 mm



**▲ 20135.1.B**  
MASTER,  
universal  
**Δ 20135.B**  
As above  
**20135.120.B**  
As above,  
120 V~.  
Depth: 41,5 mm

**▲ 20136.1.B**  
MASTER,  
universal, with  
potentiometer  
**Δ 20136.B**  
As above  
**20136.120.B**  
As above,  
120 V~.  
Depth: 41,5 mm

**20137.B**  
SLAVE,  
universal  
**20137.120.B**  
As above,  
120 V~.  
Depth: 41,5 mm



**▲ 20135.1.N**  
MASTER,  
universal  
**Δ 20135.N**  
As above  
**20135.120.N**  
As above,  
120 V~.  
Depth: 41,5 mm

**▲ 20136.1.N**  
MASTER,  
universal, with  
potentiometer  
**Δ 20136.N**  
As above  
**20136.120.N**  
As above,  
120 V~.  
Depth: 41,5 mm

**20137.N**  
SLAVE,  
universal  
**20137.120.N**  
As above,  
120 V~.  
Depth: 41,5 mm



**20138**  
RGB, with  
potentiometer  
**20138.120**  
As above,  
120 V~.  
Depth: 41,5 mm

**20139**  
FADING-SHOW,  
with potentiometer  
**20139.120**  
As above,  
120 V~.  
Depth: 41,5 mm



**20138.B**  
RGB, with  
potentiometer  
**20138.120.B**  
As above,  
120 V~.  
Depth: 41,5 mm

**20139.B**  
FADING-SHOW,  
with potentiometer  
**20139.120.B**  
As above,  
120 V~.  
Depth: 41,5 mm



**20138.N**  
RGB, with  
potentiometer  
**20138.120.N**  
As above,  
120 V~.  
Depth: 41,5 mm

**20139.N**  
FADING-SHOW,  
with potentiometer  
**20139.120.N**  
As above,  
120 V~.  
Depth: 41,5 mm



**\*20148**  
MASTER,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm

**\*20149**  
SLAVE,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm



**\*20148.B**  
MASTER,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm

**\*20149.B**  
SLAVE,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm



**\*20148.N**  
MASTER,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm

**\*20149.N**  
SLAVE,  
800 W/500 VA  
120-230 V~.  
Depth: 41,5 mm

\* Lamps and signalling units, page 75

\*\* Please refer to instruction sheets for load type

## Devices

Grey	White	Next
------	-------	------

### Dimmers (fuse protected for British Standard boxes with depth equal or higher than 35 mm)\*\*



**Δ\*20140**  
MASTER, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20142**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ\*20141**  
SLAVE, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20143**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ\*20140.B**  
MASTER, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20142.B**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ\*20141.B**  
SLAVE, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20143.B**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ\*20140.N**  
MASTER, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20142.N**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ\*20141.N**  
SLAVE, 700 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ\*20143.N**  
As above, 500 VA  
- 2 modules  
Only for electronic  
transformers



Depth: 32,5 mm



**20165**  
MASTER, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**20167**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ 20166**  
SLAVE, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ 20168**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm



**20165.B**  
MASTER, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**20167.B**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ 20166.B**  
SLAVE, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ 20168.B**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm



**20165.N**  
MASTER, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**20167.N**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm



**Δ 20166.N**  
SLAVE, 500 W  
230 V~ - 2 modules.  
For incandescent lamps  
and ferromagnetic  
transformers

**Δ 20168.N**  
As above, 400 VA  
- 2 modules.  
Only for electronic  
transformers



Depth: 32,5 mm

### Electronic transformers (230-240 V~ 50/60 Hz)



**Δ 01860.60**  
20-60 W,  
12 V~ (SELV) output



**01860.105**  
20-105 W,  
12 V~ (SELV) output

### Bleeder



**01873**  
230 V~ 50 Hz, flush  
mounting (rear side)

**01873.120**  
As above, 120 V~

### Electronic supply unit



**01874**  
230 V~ 50 Hz, for controllable  
LED lamps, 12-24 Vdc

**01874.120** As above, 120 V~



**01875**  
230 V~ 50 Hz, for controllable  
LED lamps, 350/500/700 mA

**01875.120** As above, 120 V~



**01876**  
230 V~ 50 Hz, for controllable  
LED RGB lamps, 12-24 Vdc

**01876.120** As above, 120 V~



## Devices

Grey	White	Next
------	-------	------

### Touch switches (230 V~ with built-in touch sensor)

<p><b>20120</b> Electronic switch, NO 6 A relay. Depth: 37 mm</p> <p><b>20125</b> Dimmer, 40-500 W/WA, MASTER. Depth: 41,5 mm</p> <p><b>20123</b> Push button for remote control, 50/60 Hz. Depth: 37 mm</p>	<p><b>20120.B</b> Electronic switch, NO 6 A relay. Depth: 37 mm</p> <p><b>20125.B</b> Dimmer, 40-500 W/WA, MASTER. Depth: 41,5 mm</p> <p><b>20123.B</b> Push button for remote control, 50/60 Hz. Depth: 37 mm</p>	<p><b>20120.N</b> Electronic switch, NO 6 A relay. Depth: 37 mm</p> <p><b>20125.N</b> Dimmer, 40-500 W/WA, MASTER. Depth: 41,5 mm</p> <p><b>20123.N</b> Push button for remote control, 50/60 Hz. Depth: 37 mm</p>
--	--	--

### Infrared switches

<p><b>20172</b> Receiver, NO 6 A 230 V~ relay output, 50/60 Hz <b>20172.120</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20173</b> Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm</p> <p><b>20175</b> Receiver, 40-450 W/WA dimmer, 230 V~. Depth: 41,5 mm</p>	<p><b>20172.B</b> Receiver, NO 6 A 230 V~ relay output, 50/60 Hz <b>20172.120.B</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20173.B</b> Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm</p> <p><b>20175.B</b> Receiver, 40-450 W/WA dimmer, 230 V~. Depth: 41,5 mm</p>	<p><b>20172.N</b> Receiver, NO 6 A 230 V~ relay output, 50/60 Hz <b>20172.120.N</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20173.N</b> Receiver, 4 A 230 V~ relay outputs, for rolling shutters - 2 modules. Depth: 37 mm</p> <p><b>20175.N</b> Receiver, 40-450 W/WA dimmer, 230 V~. Depth: 41,5 mm</p>
--	--	--



<p><b>20181</b> Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz <b>20181.120</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20184</b> For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm</p>	<p><b>20181.B</b> Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz <b>20181.120.B</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20184.B</b> For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm</p>	<p><b>20181.N</b> Lighting switch, NO 6 A 230 V~ relay output, 50/60 Hz <b>20181.120.N</b> As above, 120 V~. Depth: 37 mm</p> <p><b>20184.N</b> For incandescent lamps, 60-300 W, 230 V~ 50/60 Hz. Depth: 37 mm</p>
---	---	---

<p><b>00800.14</b> Frame for orientable support surface mounting</p> <p><b>00805.14</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p> <p><b>00801.14</b> Orientable support - 1 module</p>	<p><b>00800</b> Frame for orientable support surface mounting</p> <p><b>00805</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p> <p><b>00801</b> Orientable support - 1 module</p>	<p><b>00800.20</b> Frame for orientable support surface mounting</p> <p><b>00805.20</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm</p> <p><b>00801.20</b> Orientable support - 1 module</p>
--	---	--



## Devices • Socket outlets

Grey	White	Next
------	-------	------

### Set/Reset push buttons



**20183**  
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.  
Depth: 38,5 mm



**20183.B**  
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.  
Depth: 38,5 mm



**20183.N**  
For emergency call, 2 NO 5 A 250 V~, 12 V~/12-24 Vdc (SELV) - 2 modules.  
Depth: 38,5 mm

### SICURY 2P+E Italian standard socket outlets 250 V~



**20201**  
10 A, P11.  
Depth: 25 mm



**20203**  
Bpresa 16 A, P17/11.  
Depth: 25 mm



**20201.B**  
10 A, P11.  
Depth: 25 mm



**20203.B**  
Bpresa 16 A, P17/11.  
Depth: 25 mm



**20201.N**  
10 A, P11.  
Depth: 25 mm



**20203.N**  
Bpresa 16 A, P17/11.  
Depth: 25 mm



**20209**  
16 A, P30  
- 2 modules.  
Depth: 29,4 mm




**20210**  
16 A, universal  
- 2 modules.  
Depth: 26 mm




**20209.B**  
16 A, P30  
- 2 modules.  
Depth: 29,4 mm



**20210.B**  
16 A, universal  
- 2 modules.  
Depth: 26 mm




**20209.N**  
16 A, P30  
- 2 modules.  
Depth: 29,4 mm



**20210.N**  
16 A, universal  
- 2 modules.  
Depth: 26 mm

### SICURY 2P+E socket outlets 250 V~ (for dedicated supply lines)



**20203.R**  
Bpresa 16 A, P17/11, red.  
Depth: 25 mm



**20209.A**  
16 A, P30, orange  
- 2 modules.  
Depth: 29,4 mm



**20209.R**  
16 A, P30, red  
- 2 modules.  
Depth: 29,4 mm



**20209.V**  
16 A, P30, green  
- 2 modules.  
Depth: 29,4 mm



**20210.R**  
16 A, universal, red  
- 2 modules.  
Depth: 29,4 mm

### SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)



**20273**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.  
Depth: 39,7 mm



**20273.B**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.  
Depth: 39,7 mm



**20273.N**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 2 modules.  
Depth: 39,7 mm



**20276**  
16 A P30 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,8 mm



**20283**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,7 mm



**20276.B**  
16 A P30 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,8 mm



**20283.B**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,7 mm



**20276.N**  
16 A P30 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,8 mm



**20283.N**  
Bpresa 16 A P17/11 250 V~, 1P+N C 16 - 3 modules.  
Depth: 39,7 mm

## Socket outlets

Grey	White	Next
------	-------	------

### SICURY 2P+E interlocked socket outlets with CB and RCBO $I_{\Delta n}$ 10 mA, (120-230 V~ 50/60 Hz)



**20286**  
16 A P30 250 V~, 1P+N C 16  
- 4 modules. Depth: 39,8 mm



**20286.B**  
16 A P30 250 V~, 1P+N C 16  
- 4 modules. Depth: 39,8 mm



**20286.N**  
16 A P30 250 V~, 1P+N C 16  
- 4 modules. Depth: 39,8 mm

### Shaver supply units



**20290**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs  
- 3 modules. Depth: 42 mm



**20290.B**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs  
- 3 modules. Depth: 42 mm




**20290.N**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs  
- 3 modules. Depth: 42 mm



**20291<sup>6</sup>**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs.  
Depth: 41 mm



**20291.B<sup>6</sup>**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs.  
Depth: 41 mm



**20291.N<sup>6</sup>**  
230 V~ 50/60 Hz, with 20 VA isolating transformer, 230 V~ and 120 V~ outputs.  
Depth: 41 mm

### Socket outlets 250 V~ - German standard



**20208**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 29,4 mm



**20208.C**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 31,2 mm



**20208.B**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 29,4 mm



**20208.C.B**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 31,2 mm



**20208.N**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 29,4 mm



**20208.C.N**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 31,2 mm

### Socket outlets 250 V~, screwless terminals - German standard



**20208.FX**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 33,5 mm



**20208.FX.C**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 34,4 mm



**20208.FX.B**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 33,5 mm



**20208.FX.C.B**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 34,4 mm



**20208.FX.N**  
SICURY 2P+E  
16 A, German  
- 2 modules.  
Depth: 33,5 mm

































**20208.FX.C.N**  
SICURY 2P+E 16 A,  
German, with cover  
- 2 modules.  
Depth: 34,4 mm

<sup>6</sup> Lamps and signalling units, page 75

<sup>6</sup> Conform to BS 61558-2-5

## Socket outlets

Grey		White		Next				
<b>Socket outlets 250 V~ - French standard</b>								
								
<b>20212</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	<b>20212.C</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	<b>20212.B</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	<b>20212.C.B</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm	<b>20212.N</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 26,4 mm	<b>20212.C.N</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 28,3 mm			
<b>Socket outlets 250 V~, screwless terminals - French standard</b>								
								
<b>20212.FX</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	<b>20212.FX.C</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	<b>20212.FX.B</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	<b>20212.FX.C.B</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm	<b>20212.FX.N</b> SICURY 2P+E 16 A, French - 2 modules. Depth: 30,5 mm	<b>20212.FX.C.N</b> SICURY 2P+E 16 A, French, with cover - 2 modules. Depth: 31,5 mm			
<b>Socket outlets 250 V~ - English standard</b>								
								
<b>20214</b> SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	<b>20219<sup>^</sup></b> 2P+E 13 A, English - 2 modules. Depth: 17 mm	<b>20220</b> SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	<b>20214.B</b> SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	<b>20219.B<sup>^</sup></b> 2P+E 13 A, English - 2 modules. Depth: 17 mm	<b>20220.B</b> SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm	<b>20214.N</b> SICURY 2P+E 5 A, English - 2 modules. Depth: 17,8 mm	<b>20219.N<sup>^</sup></b> 2P+E 13 A, English - 2 modules. Depth: 17 mm	<b>20220.N</b> SICURY 2P+E 13 A, English - 2 modules. Depth: 24,4 mm
<b>Socket outlets 250 V~ - Swiss standard</b>								
								
<b>20226</b> 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	<b>20226.B</b> 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm	<b>20226.N</b> 2P+E 10 A, Swiss, 13-type - 2 modules. Depth: 36,75 mm						
<b>Socket outlets 250 V~ - Euro-American standard</b>								
								
<b>20234</b> SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	<b>20248</b> SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	<b>20234.B</b> SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	<b>20248.B</b> SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm	<b>20234.N</b> SICURY 2P 16 A, Euro-American (ø 4,8 mm). Depth: 28,5 mm	<b>20248.N</b> SICURY 2P+E 16 A, Euro-American - 2 modules. Depth: 26,5 mm			

## Socket outlets

Grey	White	Next
------	-------	------

### Socket outlets 250 V~ - Euro-American standard



**20249**  
Two SICURY 2P+E 16 A,  
Euro-American - 3 modules.  
Depth: 24,5 mm



**20249.B**  
Two SICURY 2P+E 16 A,  
Euro-American - 3 modules.  
Depth: 24,5 mm



**20249.N**  
Two SICURY 2P+E 16 A,  
Euro-American - 3 modules.  
Depth: 24,5 mm

### Socket outlets 127 V~ - USA and Saudi Arabian standards



**20242**  
SICURY  
2P+E 15 A,  
USA and Arabian.  
Depth: 27,4 mm



**20243**  
Two SICURY 2P+E 15 A,  
USA and Arabian - 3 modules.  
Depth: 26 mm



**20242.B**  
SICURY  
2P+E 15 A,  
USA and Arabian.  
Depth: 27,4 mm



**20243.B**  
Two SICURY 2P+E 15 A,  
USA and Arabian - 3 modules.  
Depth: 26 mm



**20242.N**  
SICURY  
2P+E 15 A,  
USA and Arabian.  
Depth: 27,4 mm



**20243.N**  
Two SICURY 2P+E 15 A,  
USA and Arabian - 3 modules.  
Depth: 26 mm

### Socket outlets 250 V~ - Israeli standard



**20240**  
SICURY 2P+E 16 A,  
Israeli - 2 modules.  
Depth: 28,7 mm



**20240.B**  
SICURY 2P+E 16 A,  
Israeli - 2 modules.  
Depth: 28,7 mm



**20240.N**  
SICURY 2P+E 16 A,  
Israeli - 2 modules.  
Depth: 28,7 mm

### Socket outlets 250 V~ - Argentinian standard



**20250**  
SICURY  
2P+E 10 A,  
Argentinian.  
Depth: 27,5 mm



**20250.B**  
SICURY  
2P+E 10 A,  
Argentinian.  
Depth: 27,5 mm



**20250.N**  
SICURY  
2P+E 10 A,  
Argentinian.  
Depth: 27,5 mm

### Socket outlets 250 V~ - Chinese standard



**20251**  
SICURY  
2P+E 10 A,  
Chinese.  
Depth: 27,5 mm



**20252**  
SICURY 2P+E  
10 A, Chinese.  
- 2 modules.  
Depth: 27,3 mm



**20254**  
SICURY 2P+E  
16 A, Chinese.  
- 2 modules.  
Depth: 30 mm




**20251.B**  
SICURY  
2P+E 10 A,  
Chinese.  
Depth: 27,5 mm



**20252.B**  
SICURY 2P+E  
10 A, Chinese.  
- 2 modules.  
Depth: 27,3 mm



**20254.B**  
SICURY 2P+E  
16 A, Chinese.  
- 2 modules.  
Depth: 30 mm



**20251.N**  
SICURY  
2P+E 10 A,  
Chinese.  
Depth: 27,5 mm



**20252.N**  
SICURY 2P+E  
10 A, Chinese.  
- 2 modules.  
Depth: 27,3 mm



**20254.N**  
SICURY 2P+E  
16 A, Chinese.  
- 2 modules.  
Depth: 30 mm

## Socket outlets

Grey	White	Next
------	-------	------

### Socket outlets 250 V~ - Brazilian standard



**20264**  
SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm

**20265**  
SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm



**20264.B**  
SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm

**20265.B**  
SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm



**20264.N**  
SICURY 2P+E 10 A, Brazilian. Depth: 31,5 mm

**20265.N**  
SICURY 2P+E 20 A, Brazilian. Depth: 31,5 mm

### Socket outlets 250 V~ - Multistandard



**20257**  
SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm



**20257.B**  
SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm



**20257.N**  
SICURY 2P+E 13 A, multistandard - 2 modules. Depth: 18,7 mm


### Socket outlets 125 V~ - 2P+E 15 A 60 Hz American standard



**21296**  
Double American standard with GFCI - 3 modules. Depth: 33,4 mm



**21296.B**  
Double American standard with GFCI - 3 modules. Depth: 33,4 mm



**21296.N**  
Double American standard with GFCI - 3 modules. Depth: 33,4 mm

### British standard socket outlets 250 V~ (with signalling unit 00930 included)



**20221.L<sup>4</sup>**  
SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm



**20222.L<sup>4</sup>**  
SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm



**20221.L.B<sup>4</sup>**  
SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm



**20222.L.B<sup>4</sup>**  
SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm



**20221.L.N<sup>4</sup>**  
SICURY 2P+E 13 A, 1-gang, switched. Depth: 17,5 mm



**20222.L.N<sup>4</sup>**  
SICURY 2P+E 13 A, 2-gang, switched. Depth: 17,5 mm



**20215.L<sup>5</sup>**  
SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm



**20217.L<sup>5</sup>**  
SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm



**20215.L.B<sup>5</sup>**  
SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm



**20217.L.B<sup>5</sup>**  
SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm



**20215.L.N<sup>5</sup>**  
SICURY 2P+E 5 A, 1-gang, switched. Depth: 17,5 mm



**20217.L.N<sup>5</sup>**  
SICURY 2P+E 15 A, 1-gang, switched. Depth: 25,5 mm















## Socket outlets • Signal reception socket outlets

Grey	White	Next
------	-------	------

### USB supply unit

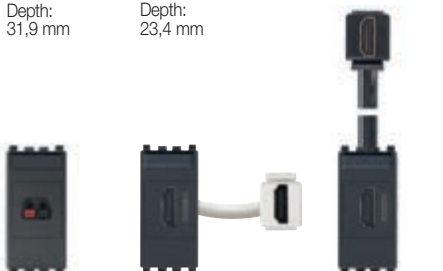 <p><b>20292</b> 5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz. Depth: 37 mm</p> <p><b>20295</b> 5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p><b>20292.B</b> 5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz. Depth: 37 mm</p> <p><b>20295.B</b> 5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>	 <p><b>20292.N</b> 5 V 1,5 A supply unit, 1 USB, 120-230 V~ 50/60 Hz. Depth: 37 mm</p> <p><b>20295.N</b> 5 V 2,1 A supply unit, 2 USB ports supply a total of 2,1 A, 120-230 V~ 50/60 Hz - 2 modules. Depth: 37 mm</p>
--	---	---

### Special socket outlets

 <p><b>20331</b> 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm</p> <p><b>20333</b> 5P DIN 41524 socket connector. Depth: 11 mm</p> <p><b>20334</b> 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm</p>	 <p><b>20331.B</b> 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm</p> <p><b>20333.B</b> 5P DIN 41524 socket connector. Depth: 11 mm</p> <p><b>20334.B</b> 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm</p>	 <p><b>20331.N</b> 2P 6 A 24 V (SELV), for plug 01616/01617. Depth: 25 mm</p> <p><b>20333.N</b> 5P DIN 41524 socket connector. Depth: 11 mm</p> <p><b>20334.N</b> 2P point-line 60130-9 IEC-07 socket connector. Depth: 11 mm</p>
 <p><b>20345</b> USB outlet, screw terminals. Depth: 31,9 mm</p> <p><b>20335</b> 3 RCA outlets, screw terminals. Depth: 23,4 mm</p>	 <p><b>20345.B</b> USB outlet, screw terminals. Depth: 31,9 mm</p> <p><b>20335.B</b> 3 RCA outlets, screw terminals. Depth: 23,4 mm</p>	 <p><b>20345.N</b> USB outlet, screw terminals. Depth: 31,9 mm</p> <p><b>20335.N</b> 3 RCA outlets, screw terminals. Depth: 23,4 mm</p>
 <p><b>20583</b> Spring connector for speaker. Depth: 19,4 mm</p> <p><b>20346</b> HDMI outlet, Keystone connection. Depth: 37,4 mm</p> <p>▲ <b>20346.H</b> HDMI outlet, Keystone connection, with 90° cable. Depth: 30,5 mm</p>	 <p><b>20583.B</b> Spring connector for speaker. Depth: 19,4 mm</p> <p><b>20346.B</b> HDMI outlet, Keystone connection. Depth: 37,4 mm</p> <p>▲ <b>20346.H.B</b> HDMI outlet, Keystone connection, with 90° cable. Depth: 30,5 mm</p>	 <p><b>20583.N</b> Spring connector for speaker. Depth: 19,4 mm</p> <p><b>20346.N</b> HDMI outlet, Keystone connection. Depth: 37,4 mm</p> <p>▲ <b>20346.H.N</b> HDMI outlet, Keystone connection, with 90° cable. Depth: 30,5 mm</p>
 <p><b>20348</b> VGA, 15-pin. Depth: 11 mm</p>	 <p><b>20348.B</b> VGA, 15-pin. Depth: 11 mm</p>	 <p><b>20348.N</b> VGA, 15-pin. Depth: 11 mm</p>

## Signal reception socket outlets

Grey	White	Next
------	-------	------

### Phone jack

<p><b>20320</b> RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p><b>20321</b> RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p><b>20324</b> Israeli standard, screw terminals. Depth: 33,4 mm</p>	<p><b>20320.B</b> RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p><b>20321.B</b> RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p><b>20324.B</b> Israeli standard, screw terminals. Depth: 33,4 mm</p>	<p><b>20320.N</b> RJ11, 6-position, 4-contact (6/4). Depth: 33,6 mm</p> <p><b>20321.N</b> RJ12, 6-position, 6-contact (6/6). Depth: 33,6 mm</p> <p><b>20324.N</b> Israeli standard, screw terminals. Depth: 33,4 mm</p>
<p><b>20327</b> 8-contact, French standard - 2 modules. Depth: 22 mm</p>	<p><b>20327.B</b> 8-contact, French standard - 2 modules. Depth: 22 mm</p>	<p><b>20327.N</b> 8-contact, French standard - 2 modules. Depth: 22 mm</p>
<p><b>20322</b> RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p><b>20323</b> RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p><b>20325</b><sup>7</sup> BT, MASTER. Depth: 33,4 mm</p> <p><b>20326</b><sup>7</sup> BT, SLAVE. Depth: 33,4 mm</p>	<p><b>20322.B</b> RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p><b>20323.B</b> RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p><b>20325.B</b><sup>7</sup> BT, MASTER. Depth: 33,4 mm</p> <p><b>20326.B</b><sup>7</sup> BT, SLAVE. Depth: 33,4 mm</p>	<p><b>20322.N</b> RJ11, 6-position 4-contact (6/4) + cover. Depth: 33,4 mm</p> <p><b>20323.N</b> RJ12, 6-position 6-contact (6/6) + cover. Depth: 33,4 mm</p> <p><b>20325.N</b><sup>7</sup> BT, MASTER. Depth: 33,4 mm</p> <p><b>20326.N</b><sup>7</sup> BT, SLAVE. Depth: 33,4 mm</p>

### RJ45 data ports

<p><b>20337.6</b> Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p><b>20338.1</b> <sup>Δ</sup> AT&amp;T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p> <p><b>20338.3</b> <sup>Δ</sup> AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm</p> <p><b>20338.4</b> <sup>Δ</sup> AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm</p>	<p><b>20337.6.B</b> Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p><b>20338.1.B</b> <sup>Δ</sup> AT&amp;T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p>	<p><b>20337.6.N</b> Cat. 6, UTP, shuttered. Depth: 26,1 mm</p> <p><b>20338.1.N</b> <sup>Δ</sup> AT&amp;T/Lucent T./Avaya, Cat. 5e, UTP. Depth: 22,3 mm</p> <p><b>20338.3.N</b> <sup>Δ</sup> AMP/Tyco, Cat. 5e, UTP. Depth: 22,7 mm</p> <p><b>20338.4.N</b> <sup>Δ</sup> AMP/Tyco, Cat. 5e, FTP. Depth: 32,1 mm</p>
<p><b>20338.8</b> Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p><b>20339.4</b> Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p><b>20339.5</b> Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p><b>20339.6</b> Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>	<p><b>20338.8.B</b> Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p><b>20339.4.B</b> Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p><b>20339.5.B</b> Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p><b>20339.6.B</b> Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>	<p><b>20338.8.N</b> Netsafe, Cat. 5e, UTP. Depth: 23,6 mm</p> <p><b>20339.4.N</b> Netsafe, Cat. 5e, UTP 110. Depth: 24,7 mm</p> <p><b>20339.5.N</b> Netsafe, Cat. 5e, FTP 110. Depth: 36,15 mm</p> <p><b>20339.6.N</b> Netsafe, Cat. 6, UTP 110. Depth: 22,3 mm</p>
<p><b>20339.11</b> Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p><b>20339.13</b> Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p><b>20339.14</b> Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>	<p><b>20339.11.B</b> Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p><b>20339.13.B</b> Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p><b>20339.14.B</b> Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>	<p><b>20339.11.N</b> Netsafe, Cat. 5e, UTP. Depth: 30,3 mm</p> <p><b>20339.13.N</b> Netsafe, Cat. 6, UTP. Depth: 30,3 mm</p> <p><b>20339.14.N</b> Netsafe, Cat. 6, FTP. Depth: 30,3 mm</p>



## Signal reception socket outlets

Grey	White	Next
------	-------	------

### RJ45 data ports

<p><b>▲20339.15</b> Netsafe, Cat. 6A, UTP. Depth: 30,3 mm</p>	<p><b>20339.16</b> Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p>	<p><b>20340.1</b> Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p>	<p><b>▲20340.2</b> Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>	<p><b>▲20339.15.B</b> Netsafe, Cat. 6A, UTP. Depth: 30,3 mm</p>	<p><b>20339.16.B</b> Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p>	<p><b>20340.1.B</b> Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p>	<p><b>▲20340.2.B</b> Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>	<p><b>▲20339.15.N</b> Netsafe, Cat. 6A, UTP. Depth: 30,3 mm</p>	<p><b>20339.16.N</b> Netsafe, Cat. 6A, FTP. Depth: 30,3 mm</p>	<p><b>20340.1.N</b> Panduit, Cat. 5e, UTP. Depth: 28,55 mm</p>	<p><b>▲20340.2.N</b> Panduit, Cat. 5e, FTP. Depth: 29,05 mm</p>
---	--	--	---	---	--	--	---	---	--	--	---

### Data ports

<p><b>20361</b> BNC, coaxial cable soldering. Depth: 11 mm</p>	<p><b>20365</b> 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>	<p><b>20361.B</b> BNC, coaxial cable soldering. Depth: 11 mm</p>	<p><b>20365.B</b> 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>	<p><b>20361.N</b> BNC, coaxial cable soldering. Depth: 11 mm</p>	<p><b>20365.N</b> 9-pin, D-SUB, soldering - 2 modules. Depth: 11 mm</p>
--	---	--	---	--	---

### Adapters for data ports

<p><b>20338.C</b> RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm</p>	<p><b>20340.C</b> For MINI-COM Panduit. Depth: 11 mm</p>	<p><b>▲20341.C</b> For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>	<p><b>▲20343.K</b> Slanting adaptor for RJ45 Keystone. Depth: 11 mm</p>	<p><b>20338.C.B</b> RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm</p>	<p><b>20340.C.B</b> For MINI-COM Panduit. Depth: 11 mm</p>	<p><b>▲20341.C.B</b> For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>	<p><b>▲20343.K.B</b> Slanting adaptor for RJ45 Keystone. Depth: 11 mm</p>	<p><b>20338.C.N</b> RJ45, Cat. 5/6 AMP, Lucent T. Depth: 11 mm</p>	<p><b>20340.C.N</b> For MINI-COM Panduit. Depth: 11 mm</p>	<p><b>▲20341.C.N</b> For Cat. 5e and 6 Slim of Infra+, Merlin Gerin. Depth: 11 mm</p>	<p><b>▲20343.K.N</b> Slanting adaptor for RJ45 Keystone. Depth: 11 mm</p>
--	--	---	---	--	--	---	---	--	--	---	---

### Sockets for fibre optic cable

<p><b>▲20350.SC</b> Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20350.LC</b> Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm</p>	<p><b>▲20351.SC</b> Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20351.LC</b> Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm</p>	<p><b>▲20350.SC.B</b> Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20350.LC.B</b> Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm</p>	<p><b>▲20351.SC.B</b> Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20351.LC.B</b> Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm</p>	<p><b>▲20350.SC.N</b> Monomode 9/125 µm, with SC/ APC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20350.LC.N</b> Monomode 9/125 µm, with LC duplex adapter. Depth: 19,7 mm</p>	<p><b>▲20351.SC.N</b> Multimode 50/125 µm, with SC simplex adapter. Depth: 19,4 mm</p>	<p><b>▲20351.LC.N</b> Multimode 50/125 µm, with LC duplex adapter. Depth: 17,9 mm</p>
---	---	--	---	---	---	--	---	---	---	--	---







### Coaxial TV-RD-SAT 5-2400 MHz socket outlets (output male and female)

<p><b>20300.01</b> Single connection, 1 dB. Depth: 26,8 mm</p>	<p><b>20300.10</b> Through-line, 10 dB. Depth: 26,8 mm</p>	<p><b>20300.01.B</b> Single connection, 1 dB. Depth: 26,8 mm</p>	<p><b>20300.10.B</b> Through-line, 10 dB. Depth: 26,8 mm</p>	<p><b>20300.01.N</b> Single connection, 1 dB. Depth: 26,8 mm</p>	<p><b>20300.10.N</b> Through-line, 10 dB. Depth: 26,8 mm</p>
--	--	--	--	--	--

## Signal reception socket outlets

Grey	White	Next
------	-------	------




### Coaxial TV-RD-SAT 5-2400 MHz socket outlets, demix (male and F-type outputs)

 <b>20302.01</b> Single connection 1 dB - 2 modules. Depth: 22,4 mm	 <b>20302.10</b> Through-line 10 dB - 2 modules. Depth: 22,4 mm	 <b>20302.01.B</b> Single connection 1 dB - 2 modules. Depth: 22,4 mm	 <b>20302.10.B</b> Through-line 10 dB - 2 modules. Depth: 22,4 mm	 <b>20302.01.N</b> Single connection 1 dB - 2 modules. Depth: 22,4 mm	 <b>20302.10.N</b> Through-line 10 dB - 2 modules. Depth: 22,4 mm
---	--	--	--	--	--

### Coaxial TV-FM-SAT 5-2400 MHz socket outlets (male, female and F-type outputs)

 <b>20303</b> Single connection 1 dB - 2 modules. Depth: 20,5 mm	 <b>20303.B</b> Single connection 1 dB - 2 modules. Depth: 20,5 mm	 <b>20303.N</b> Single connection 1 dB - 2 modules. Depth: 20,5 mm
---	--	--

### F-type socket outlets

 <b>20318</b> With F type female connector. Depth: 11 mm	 <b>20318.B</b> With F type female connector. Depth: 11 mm	 <b>20318.N</b> With F type female connector. Depth: 11 mm
---	--	--

### Coaxial TV 40-862 MHz socket outlets (1 output: female)








































 <b>*20313</b> Single connection. Depth: 29,2 mm	 <b>*20314</b> Through-line 20 dB. Depth: 29,2 mm	 <b>*20313.B</b> Single connection. Depth: 29,2 mm	 <b>*20314.B</b> Through-line 20 dB. Depth: 29,2 mm	 <b>*20313.N</b> Single connection. Depth: 29,2 mm	 <b>*20314.N</b> Through-line 20 dB. Depth: 29,2 mm
---	---	--	---	--	---

### Adaptors for coaxial TV-RD-SAT socket outlets

 <b>20319</b> For 2 or 3 outputs - 2 modules	 <b>20319.B</b> For 2 or 3 outputs - 2 modules	 <b>20319.N</b> For 2 or 3 outputs - 2 modules
---	--	--

### Terminal resistor and coaxial TV-RD-SAT 2400 MHz connectors

 <b>16330</b> Z 75 Ω, for frequencies up to 2400 MHz	 <b>01644</b> Male, axial cable entry	 <b>01645</b> Female, axial cable entry	 <b>01634</b> Male, 90°-cable entry	 <b>01635</b> Female, 90°-cable entry	 <b>01654</b> Male F-type, for RG59 cable
---	---	---	---	---	--

Grey	White	Next
<b>Electromechanical bells</b>		
 <p><b>20370</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20372</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20373</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
 <p><b>20370.B</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20372.B</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20373.B</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
 <p><b>20370.N</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20372.N</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20373.N</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
<b>Electronic bells</b>		
 <p><b>20380</b> 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm</p>	 <p><b>20380.B</b> 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm</p>	 <p><b>20380.N</b> 3-sound-sequence, supply voltage 12 V~ and 12 Vdc (SELV) - 2 modules. Depth: 37 mm</p>
<b>Buzzers</b>		
 <p><b>20375</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20377</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20378</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
 <p><b>20375.B</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20377.B</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20378.B</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
 <p><b>20375.N</b> 12 V~ (SELV) 50/60 Hz. Depth: 37 mm</p>	 <p><b>20377.N</b> 120 V~ 50/60 Hz. Depth: 37 mm</p>	 <p><b>20378.N</b> 230 V~ 50/60 Hz. Depth: 37 mm</p>
<b>Luminous indicator units (for signalling units*)</b>		
 <p><b>20386.B</b> White diffuser. Depth: 23 mm</p>	 <p><b>20386.B.B</b> White diffuser. Depth: 23 mm</p>	 <p><b>20386.B.N</b> White diffuser. Depth: 23 mm</p>
 <p>Δ <b>20386.A</b> Orange diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.R</b> Red diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.V</b> Green diffuser. Depth: 23 mm</p>
 <p>Δ <b>20386.A.B</b> Orange diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.R.B</b> Red diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.V.B</b> Green diffuser. Depth: 23 mm</p>
 <p>Δ <b>20386.A.N</b> Orange diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.R.N</b> Red diffuser. Depth: 23 mm</p>	 <p>Δ <b>20386.V.N</b> Green diffuser. Depth: 23 mm</p>
<b>Double indicator units (for 2 signalling units*)</b>		
 <p><b>20388</b> Neutral diffusers. Depth: 23 mm</p>	 <p><b>20388.B</b> Neutral diffusers. Depth: 23 mm</p>	 <p><b>20388.N</b> Neutral diffusers. Depth: 23 mm</p>
 <p>Δ <b>20388.AB</b> Orange and white diffusers. Depth: 23 mm</p>	 <p>Δ <b>20388.AB.B</b> Orange and white diffusers. Depth: 23 mm</p>	 <p>Δ <b>20388.AB.N</b> Orange and white diffusers. Depth: 23 mm</p>

Grey	White	Next
------	-------	------

### Double indicator units (for 2 signalling units°)



**Δ 20388.BR**  
White and red diffusers.  
Depth: 23 mm



**Δ 20388.AV.B**  
Orange and green diffusers.  
Depth: 23 mm



**Δ 20388.BR.B**  
White and red diffusers.  
Depth: 23 mm



**Δ 20388.RV.B**  
Red and green diffusers.  
Depth: 23 mm



**Δ 20388.AV.N**  
Orange and green diffusers.  
Depth: 23 mm




**Δ 20388.BR.N**  
White and red diffusers.  
Depth: 23 mm



**Δ 20388.RV.N**  
Red and green diffusers.  
Depth: 23 mm


### Prismatic indicator units - 2 modules (for 14770, 14771, 14776 and 14777 lamps - supplied without lamp)




**Δ 20387.A**  
Orange diffuser.  
Depth: 25 mm



**20387.B**  
White diffuser.  
Depth: 25 mm



**20387.R**  
Red diffuser.  
Depth: 25 mm



**20387.V**  
Green diffuser.  
Depth: 25 mm

### Step marker lamps (with high-efficiency LED)



**20381**  
230 V~ 50/60 Hz  
**20381.012**  
12 V~ 50/60 Hz or 12 Vdc (SELV).  
Depth: 37 mm



**20389**  
230 V~ 50/60 Hz - 2 modules  
**20389.120**  
As above, 120 V~.  
Depth: 37 mm



**20381.B**  
230 V~ 50/60 Hz  
**20381.012.B**  
12 V~ 50/60 Hz or 12 Vdc (SELV).  
Depth: 37 mm



**20389.B**  
230 V~ 50/60 Hz - 2 modules  
**20389.120.B**  
As above, 120 V~.  
Depth: 37 mm



**20381.N**  
230 V~ 50/60 Hz  
**20381.012.N**  
12 V~ 50/60 Hz or 12 Vdc (SELV).  
Depth: 37 mm



**20389.N**  
230 V~ 50/60 Hz - 2 modules  
**20389.120.N**  
As above, 120 V~.  
Depth: 37 mm



**20389.012**  
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.  
Depth: 37 mm



**20389.012.B**  
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.  
Depth: 37 mm



**20389.012.N**  
12 V~ 50/60 Hz or 12 Vdc (SELV) - 2 modules.  
Depth: 37 mm

### Lighting devices



**20383**  
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.  
Depth: 37 mm



**20383.B**  
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.  
Depth: 37 mm



**20383.N**  
With high-efficiency LED, 120-230 V~ 50/60 Hz - 3 modules.  
Depth: 37 mm



**02671**  
With high-efficiency LED, 120-230 V~ 50/60 Hz and built-in 7-module frame.  
Depth: 44,7 mm

Grey	White	Next
------	-------	------

### TORCIA, electronic hand-lamps (with automatic emergency device)



**20395**  
With high-efficiency LED,  
230 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm



**20396**  
With high-efficiency LED,  
120 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm



**20395.B**  
With high-efficiency LED,  
230 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm



**20396.B**  
With high-efficiency LED,  
120 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm



**20395.N**  
With high-efficiency LED,  
230 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm



**20396.N**  
With high-efficiency LED,  
120 V~ 50/60 Hz  
- 2 modules.  
Depth: 46 mm

### Emergency lighting devices (with automatic emergency device)



**20382**  
With high-efficiency LED,  
230 V~ 50/60 Hz.  
Depth: 37 mm



**20382.B**  
With high-efficiency LED,  
230 V~ 50/60 Hz.  
Depth: 37 mm



**20382.N**  
With high-efficiency LED,  
230 V~ 50/60 Hz.  
Depth: 37 mm



**20384**  
With high-efficiency LED,  
120-230 V~ 50/60 Hz  
- 3 modules.  
Depth: 37 mm




**20384.B**  
With high-efficiency LED,  
120-230 V~ 50/60 Hz  
- 3 modules.  
Depth: 37 mm



**20384.N**  
With high-efficiency LED,  
120-230 V~ 50/60 Hz  
- 3 modules.  
Depth: 37 mm

### Emergency lighting devices



**02661**  
With high-efficiency LED, 230 V~ 50/60 Hz,  
rechargeable Ni-Cd battery and built-in  
7-module frame

▲ **02661.120**  
As above 120 V~ 50/60 Hz.  
Depth: 44,7 mm



**20394**  
230 V~ 50/60 Hz, Ni-Cd battery, with FD 4W  
G5 lamp and built-in 7-module frame.  
Depth: 47,1 mm



**02662**  
LED, controllable,  
230 V~ 50 Hz  
- 3 modules

**02662.120**  
As above, 120 V~.  
Depth: 39 mm



**02663**  
LED RGB, controllable,  
230 V~ 50 Hz  
- 3 modules

**02663.120**  
As above, 120 V~.  
Depth: 39 mm

### Rechargeable batteries



**00908**  
3 x Ni-MH 1,2 V  
800 mAh,  
HR03 (AAA)



**00910**  
Ni-MH 4,8 V 80 mAh  
battery, spare part  
for TORCIA



**00911.1**  
Ni-Cd 2,4 V 1,3 Ah battery,  
spare part for emergency  
lighting devices (20394)



**00913**  
Ni-Cd 4,8 V 800 mAh  
spare rechargeable battery  
for 02661 and 02661.120






Grey	White	Next
------	-------	------







### Protection devices

 <p><b>20416</b> 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p><b>20417</b> 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p> <p><b>20417.R</b> Spare part for 20417</p>	 <p><b>20416.B</b> 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p><b>20417.B</b> 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p>	 <p><b>20416.N</b> 1P 16 A 250 V~ fuse carrier. Depth: 29 mm</p> <p><b>20417.N</b> 230 V~ SPD transient voltage suppressor. Depth: 29 mm</p>
---	---	---




### 1P+N circuit breakers (120-230 V~ 50/60 Hz)

 <p><b>20405.06</b> C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p><b>20405.10</b> C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p><b>20405.16</b> C 16, breaking capacity 3000 A. Depth: 39 mm</p>	 <p><b>20405.06.B</b> C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p><b>20405.10.B</b> C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p><b>20405.16.B</b> C 16, breaking capacity 3000 A. Depth: 39 mm</p>	 <p><b>20405.06.N</b> C 6, breaking capacity 1500 A. Depth: 39 mm</p> <p><b>20405.10.N</b> C 10, breaking capacity 3000 A. Depth: 39 mm</p> <p><b>20405.16.N</b> C 16, breaking capacity 3000 A. Depth: 39 mm</p>
---	--	--

### 1P+N residual current breakers with overcurrent protection (RCBO) (120-230 V~ 50/60 Hz )

 <p><b>20411.06</b> C 6, I<sub>Δn</sub> 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p><b>20411.10</b> C 10, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p><b>20411.06.B</b> C 6, I<sub>Δn</sub> 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p><b>20411.10.B</b> C 10, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p><b>20411.06.N</b> C 6, I<sub>Δn</sub> 10 mA breaking capacity 1500 A - 2 modules. Depth: 39 mm</p> <p><b>20411.10.N</b> C 10, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>
 <p><b>20411.16</b> C 16, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p><b>20411.16.6</b> C 16, I<sub>Δn</sub> 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p><b>20411.16.B</b> C 16, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p><b>20411.16.6.B</b> C 16, I<sub>Δn</sub> 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>	 <p><b>20411.16.N</b> C 16, I<sub>Δn</sub> 10 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p> <p><b>20411.16.6.N</b> C 16, I<sub>Δn</sub> 6 mA breaking capacity 3000 A - 2 modules. Depth: 39 mm</p>

### Detectors (230 V~ 50/60 Hz)

 <p><b>20420</b> Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p><b>20421</b> Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>	 <p><b>20420.B</b> Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p><b>20421.B</b> Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>	 <p><b>20420.N</b> Gas Stop Metano, methane gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p> <p><b>20421.N</b> Gas Stop GPL, LPG gas detector, solenoid valve control - 3 modules. Depth: 37 mm</p>
---	--	--



Grey	White	Next
------	-------	------

### Switches for fan-coil regulation



**20095**  
Slide, 1P 6(2) A  
250 V~, 4-position.  
Depth: 40 mm



**20096**  
Rotary, 1P 6(3) A 250 V~,  
4-position - 2 modules.  
Depth: 37 mm



**20095.B**  
Slide, 1P 6(2) A  
250 V~, 4-position.  
Depth: 40 mm



**20096.B**  
Rotary, 1P 6(3) A 250 V~,  
4-position - 2 modules.  
Depth: 37 mm



**20095.N**  
Slide, 1P 6(2) A  
250 V~, 4-position.  
Depth: 40 mm



**20096.N**  
Rotary, 1P 6(3) A 250 V~,  
4-position - 2 modules.  
Depth: 37 mm

### Electronic thermostats (heating and air-conditioning, 120-230 V~ 50/60 Hz)



**02950**  
Touch screen thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 5(2) A 230 V~  
change-over relay output - 2 modules.  
Depth: 38,5 mm



**02950.B**  
Touch screen thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 5(2) A 230 V~  
change-over relay output - 2 modules.  
Depth: 38,5 mm



**02950.N**  
Touch screen thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 5(2) A 230 V~  
change-over relay output - 2 modules.  
Depth: 38,5 mm

### Electronic timer-thermostats (heating and air-conditioning)



**02955**  
Touch screen timer-thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960),  
5(2) A 230 V~ change-over relay output - 3 modules.  
Depth: 35,3 mm



**02955.B**  
Touch screen timer-thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960),  
5(2) A 230 V~ change-over relay output - 3 modules.  
Depth: 35,3 mm



**02955.N**  
Touch screen timer-thermostat for ON/OFF and PID  
temperature control, 1 input for temperature  
sensor, 1 multi-function input, 1 RJ9 input for energy meter (02960),  
5(2) A 230 V~ change-over relay output - 3 modules.  
Depth: 35,3 mm



**20445**  
6(2) A 230 V~ change-over  
relay output, 120-230 V~  
50/60 Hz - 2 modules.  
Depth: 37 mm



**20445.B**  
6(2) A 230 V~ change-over  
relay output, 120-230 V~  
50/60 Hz - 2 modules.  
Depth: 37 mm



**20445.N**  
6(2) A 230 V~ change-over  
relay output, 120-230 V~  
50/60 Hz - 2 modules.  
Depth: 37 mm



**20446**  
5(2) A 250 V~ change-over relay  
output, AA LR6 1,5 V battery  
(supplied) - 3 modules.  
Depth: 43 mm



**20446.B**  
5(2) A 250 V~ change-over relay  
output, AA LR6 1,5 V battery  
(supplied) - 3 modules.  
Depth: 43 mm



**20446.N**  
5(2) A 250 V~ change-over relay  
output, AA LR6 1,5 V battery  
(supplied) - 3 modules.  
Depth: 43 mm



Grey

White

Next

### Power meter - Devices for DIN rail (60715 TH35) installation



**02960**

Power meter, 3 inputs for sensor 01457, 50 W-10 kW detectable power, for DIN (60715 TH35) rail installation 1x17,5 mm. Supplied with 01457

### Temperature sensor and moisture meter



**20432**

Electronic temperature sensor. Depth: 24,4 mm



**20433**

Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm



**20432.B**

Electronic temperature sensor. Depth: 24,4 mm



**20433.B**

Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm



**20432.N**

Electronic temperature sensor. Depth: 24,4 mm



**20433.N**

Electronic humidity sensor, 1 0-10 V or 4-20 mA output- 2 modules. Depth: 37 mm



**02965.1**

Wired temperature sensor, NTC 10 kΩ, cable length 3 m

### Clocks (120-230 V~ 50/60 Hz)



**20448**

24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm



**20448.B**

24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm



**20448.N**

24h/7day timer-switch, 1-canal, 8 A 230 V~ change-over relay output - 2 modules. Depth: 37 mm



**20449**

Electronic alarm clock - 2 modules. Depth: 37 mm



**20449.B**

Electronic alarm clock - 2 modules. Depth: 37 mm



**20449.N**

Electronic alarm clock - 2 modules. Depth: 37 mm

Grey	White	Next
------	-------	------

### Speakers



**21588**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




**21588.B**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



**21588.N**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



**20587**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



**20587.B**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



**20587.N**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm

### Video door entry system



**21554**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**21554.B**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**21554.N**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**01963**  
Due Fili Plus video door entry system module



**20557**  
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



**20577**  
Call button for Due Fili system - 3 modules. Depth: 37 mm



**20557.B**  
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



**20577.B**  
Call button for Due Fili system - 3 modules. Depth: 37 mm



**20557.N**  
Speakerphone for Due Fili system - 3 modules. Depth: 37 mm



**20577.N**  
Call button for Due Fili system - 3 modules. Depth: 37 mm



**Δ 20560**  
Inner color video camera. Depth: 37 mm



**20565**  
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



**20570**  
Inner light, with LED. Depth: 37 mm



**Δ 20560.B**  
Inner color video camera. Depth: 37 mm



**20565.B**  
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



**20570.B**  
Inner light, with LED. Depth: 37 mm



**Δ 20560.N**  
Inner color video camera. Depth: 37 mm



**20565.N**  
Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm



**20570.N**  
Inner light, with LED. Depth: 37 mm

Grey

White

Next

### Stand-alone radio devices - EnOcean® technology (868 MHz)



**20505**  
2 flat rocker buttons with EnOcean® wireless connection, no battery, to complete with 20506 - 2 modules



**▲ 01796.1**  
EnOcean® multifunction actuator, NO 8 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz



**Δ 01796**  
Actuator with EnOcean® module, relay output, supply voltage 230 V~ 50 Hz

### Stand-alone radio devices - ZigBee technology 802.15.4 (2.4 GHz)



**▲ 03905**  
2 flat rocker buttons with 2.4 GHz standard 802.15.4 wireless connection, ZigBee certified, no battery, to complete with 20506 - 2 modules

### Stand-alone radio devices - Accessories



**20507**  
Frame for surface mounting of 20505, grey



**20507.B**  
Frame for surface mounting of 20505, white



**21507**  
Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey



**21507.B**  
Frame for surface mounting of 20505, only for Eikon Evo cover plate, white



**20506**  
Pair of buttons for 20505 and 03905 devices, customizable



**20506.B**  
Pair of buttons for 20505 and 03905 devices, customizable



**20506.N**  
Pair of buttons for 20505 and 03905 devices, customizable

### Access control system



**20461**  
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



**20461.B**  
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



**20461.N**  
Smart card reader/programmer, 12-24 V~ 50/60 Hz/ 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm

Grey	White	Next
------	-------	------

### Access control system



**▲ 20463**  
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



**20465**  
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



**▲ 20463.B**  
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



**20465.B**  
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



**▲ 20463.N**  
Electronic switch, vertical pocket, 120-230 V~ 50/60 Hz - 2 modules. Depth: 20,5 mm



**20465.N**  
Electronic switch, vertical pocket, 230 V~ 50/60 Hz, 24 V~/24 Vdc (SELV) - 3 modules. Depth: 37 mm



**16452**  
Programmable smart card  
**16452.H**  
As above, customizable



**16452.S**  
ISO-card (badge)

### Bus access control system



**20470**  
Transponder card and key reader - 2 modules. Depth: 26,5 mm



**20471**  
Smart card reader and programmer - 3 modules. Depth: 37 mm



**20470.B**  
Transponder card and key reader - 2 modules. Depth: 26,5 mm



**20471.B**  
Smart card reader and programmer - 3 modules. Depth: 37 mm



**20470.N**  
Transponder card and key reader - 2 modules. Depth: 26,5 mm



**20471.N**  
Smart card reader and programmer - 3 modules. Depth: 37 mm



**20472**  
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



**20472.B**  
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



**20472.N**  
Actuator with 3 A 30 V change-over relay output - 2 modules. Depth: 26,5 mm



**20473**  
Smart card programmer in table mounting box - 4 modules



**20473.B**  
Smart card programmer in table mounting box - 4 modules



**20473.N**  
Smart card programmer in table mounting box - 4 modules



**01816**  
Transponder card  
**01816.H**  
As above, customizable



**01815**  
Transponder key



**16452**  
Programmable smart card  
**16452.H**  
As above, customizable



**16474**  
Smart card for serial connection of reader/programmer



**01400**  
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



**01401**  
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules



**Δ 01800**  
Supply unit, 29 Vdc 320 mA output, 120-230 V~ 50/60 Hz, 6 x 17,5 mm modules

Grey	White	Next
------	-------	------

### By-alarm: burglar alarm system - System components



**01700**  
Control panel, 230 V~ 50 Hz,  
8 local inputs expandable to 24,  
surface mounting

▲ **01700.DE**  
As above,  
in German language

**01700.120**  
As above,  
120 V~ 60 Hz



**01703**  
Control panel, 230 V~ 50 Hz,  
8 local inputs expandable to 64,  
surface mounting

▲ **01703.DE**  
As above,  
in German language

**01703.120**  
As above,  
120 V~ 60 Hz



**01705**  
LED keypad with display,  
12 Vdc, surface mounting

▲ **01705.DE**  
As above,  
in German language



**01715**  
Siren for outdoor use

**01716**  
Dummy siren for  
outdoor use



**01717**  
Additional power supply unit,  
230 V~ 50/60 Hz 1,5 A,  
surface mounting

**01717.120**  
As above, 120 V~



**01707**  
GSM Dual Band  
high-gain aerial



**01706**  
GSM Dual Band GSM/GPRS 900/1800 MHz  
transmitter/receiver module



**01708**  
PSTN communicator  
for control panel



**01709**  
4-input expansion  
module



**01710**  
4-output expansion  
module



**01713.EN**  
Voice synthesis  
module for control  
panel, in English



**01714**  
Tear-proof box for expansion  
modules, surface mounting



**01712**  
Interface for Ethernet network  
(LAN) and By-me home auto-  
mation system (via Web server  
01945, 01946), remote and  
local supervision/control over IP



**01725**  
Configuration cables  
and interfaces



**01711**  
Isolated interface  
for Bus signal  
regeneration

### By-alarm: burglar alarm system - Devices



**20478**  
Activator/  
partialiser.  
Depth:  
41,4 mm



**20479**  
IR and microwaves  
presence detector  
- 2 modules.  
Depth: 26,5 mm



**20478.B**  
Activator/  
partialiser.  
Depth:  
41,4 mm



**20479.B**  
IR and microwaves  
presence detector  
- 2 modules.  
Depth: 26,5 mm



**20478.N**  
Activator/  
partialiser.  
Depth:  
41,4 mm



**20479.N**  
IR and microwaves  
presence detector  
- 2 modules.  
Depth: 26,5 mm



▲ **01718.G**  
Transponder key,  
green



▲ **01718.Y**  
Transponder key,  
yellow



▲ **01718**  
Transponder key



Grey	White	Next
------	-------	------

### By-alarm: burglar alarm system - Devices



**20496**  
Indoor siren  
- 3 modules.  
Depth: 37 mm



**20496.B**  
Indoor siren  
- 3 modules.  
Depth: 37 mm



**20496.N**  
Indoor siren  
- 3 modules.  
Depth: 37 mm



**01720**  
Passive infrared and microwave dual technology detector, PET immune, surface mounting



**01721**  
Passive infrared and microwave dual technology detector, anti-masking and anti-crawl, surface mounting



**01723**  
Dual technology curtain detector, IP54 for outdoor use for entrances and windows, surface mounting



**01820**  
Flush mounting magnetic contact



**01821**  
Metal flush mounting magnetic contact



**01822**  
Visible surface magnetic contact



**01722**  
Dual technology curtain detector, for entrances and windows, surface mounting



**01724**  
Water detector for protection against flooding, floor mounting



**01823**  
Magnetic contact in metal enclosure for visual installation



**01825**  
Electromechanical cordoperated contact for rolling shutters protection



**01826**  
Electromechanical inertial contact for windows and doors protection

### By-alarm: burglar alarm system - Radiofrequency devices



**01727**  
Detector with magnetic contact for doors and windows



**01728**  
Infrared detector



**01729**  
Two-way 868 MHz radiofrequency interface



**01730**  
Two-way 868 MHz radio frequency remote control

### By-alarm: burglar alarm system - Cables



**01732**  
By-alarm system cable, halogen-free 2x0,22 mm<sup>2</sup>, suitable for I category cables (U0 = 400 V), white - 100 m



**01733**  
By-alarm system cable, halogen-free 2x0,50 mm<sup>2</sup>, suitable for I category cables (U0 = 400 V), white - 100 m



**01734**  
By-alarm system cable, halogen-free 2x0,50 mm<sup>2</sup> + 4x0,22 mm<sup>2</sup>, suitable for I category cables (U0 = 400 V), white - 100 m



**01735**  
By-alarm system cable, halogen-free 2x0,50 mm<sup>2</sup> + 6x0,22 mm<sup>2</sup>, suitable for I category cables (U0 = 400 V), white - 100 m

Grey

White

Next

### By-me: supervising - 10" IP multimedia video touch screen



**21553.2**  
10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server

### By-me: supervising - Video touch screen



**21554**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**21554.B**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**21554.BN**  
4,3" Full Flat, for Due Fili Plus video door system and control, temperature sensor input, with built-in 8-module mounting frame. Depth: 46,7 mm



**01963**  
Due Fili Plus video door entry system module

### By-me: supervising - Touch screens



**21511.1**  
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



**21511.1.B**  
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



**21511.1.BN**  
4,3" Full Flat, for control, temperature sensor input, with built-in 8-module mounting frame. Depth: 39,9 mm



**21512.1**  
For control, temperature sensor input - 3 modules. Depth: 37 mm



**21512.1.B**  
For control, temperature sensor input - 3 modules. Depth: 37 mm



**21512.1.BN**  
For control, temperature sensor input - 3 modules. Depth: 37 mm



Grey	White	Next
------	-------	------

### By-me: supervising - Devices for DIN rail (60715 TH35) installation



**01942**  
GSM phone dial, for direct connection to Bus 12-24 V~ 50/60 Hz or 12-30 Vdc (SELV), 6 x 17,5 mm modules



**01945**  
Web server for local and remote control of the By-me system via IP, 8 x 17,5 mm modules



**01946**  
Web server Light for local and remote control of the By-me system via IP, manages up to 64 devices, 8 x 17,5 mm modules

### By-me: system components - Control units



**21509**  
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules.  
Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



**21509.B**  
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules.  
Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



**21509.N**  
For control and configuration, touch display, temperature sensor input, with V51923 frame for DIN (60715 TH35) rail installation - 3 modules.  
Supplied with RJ45 socket connector and V51921 frame. Depth: 37 mm



V51921

V51923

1-module and 3-module frame for DIN rail (60715 TH35) and nib for touch screen

### By-me: system components - Software and interfaces



**01993**  
Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

### By-me: system components - Supply unit



**20580**  
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm



**20580.B**  
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm



**20580.N**  
Supply unit, 32 Vdc 100 mA output, 110-230 V~ 50/60 Hz. Depth: 40 mm

Grey	White	Next
------	-------	------

### By-me: system components - Devices for DIN rail (60715 TH35) installation

<b>01468</b> Logic unit for logic, mathematical, timing and messaging functions, 1 x 17,5 mm modules	<b>01400</b> Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules	<b>01401</b> Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules	<b>01830</b> Supply unit 12 Vdc output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules	<b>▲01845.1</b> Line coupler, 2 x 17,5 mm modules	<b>Δ 01845</b> Line coupler, 3 x 17,5 mm modules

### By-me: system components - Special Bus RJ11 jacks

<b>20329</b> Special jack for Bus, screw terminals. Depth: 33,6 mm	<b>20329.B</b> Special jack for Bus, screw terminals. Depth: 33,6 mm	<b>20329.N</b> Special jack for Bus, screw terminals. Depth: 33,6 mm

### By-me: system components - Accessories and cables

<b>01840</b> Bus system cable, halogen-free 2x0,50 mm <sup>2</sup> , rated operating voltage to earth 300/500 V, suitable for I category cables, white - 100 m	<b>01841</b> Bus system cable, halogen-free 2x0,50 mm <sup>2</sup> - 100 m	<b>01839</b> Removable 2 screw terminals, for Bus system

### By-me: video door entry - Devices

<b>20557</b> Speakerphone for Due Fili system - 3 modules Depth: 37 mm	<b>20577</b> Call button for Due Fili system - 3 modules Depth: 37 mm	<b>20557.B</b> Speakerphone for Due Fili system - 3 modules Depth: 37 mm	<b>20577.B</b> Call button for Due Fili system - 3 modules Depth: 37 mm	<b>20557.N</b> Speakerphone for Due Fili system - 3 modules Depth: 37 mm	<b>20577.N</b> Call button for Due Fili system - 3 modules Depth: 37 mm
<b>Δ 20560</b> Inner color video camera. Depth: 37 mm	<b>20565</b> Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	<b>20570</b> Inner light, with LED. Depth: 37 mm	<b>Δ 20560.B</b> Inner color video camera. Depth: 37 mm	<b>20565.B</b> Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	<b>20570.B</b> Inner light, with LED. Depth: 37 mm
<b>Δ 20560.N</b> Inner color video camera. Depth: 37 mm	<b>20565.N</b> Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	<b>20570.N</b> Inner light, with LED. Depth: 37 mm	<b>Δ 20560.N</b> Inner color video camera. Depth: 37 mm	<b>20565.N</b> Inner color video camera and built-in microphone - 2 modules. Depth: 26,5 mm	<b>20570.N</b> Inner light, with LED. Depth: 37 mm

### By-me: video door entry - Cables

<b>732H/100</b> Due Fili Plus cable for internal laying, 2x1 mm <sup>2</sup> twisted conductors, PVC sheath, operating temperature -25/+70 °C, insulation degree 450/750 V, not suitable for running through underground channels - 100 m bundle	<b>732I/100</b> Due Fili Plus cable for internal/external laying, 2x1 mm <sup>2</sup> twisted conductors, LSZH sheath and insulation, operating temperature -25/+70°C, insulation degree 600/1000 V, suitable for laying underground in dry ducting or channels with efficient drainage (max. 24 hrs wet), not suitable for laying directly underground - 100 m bundle
<b>732H/500</b> As above, 500 m bundle	<b>732I/500</b> As above, 500 m bundle

Grey	White	Next
------	-------	------

### By-me: temperature control



**02951**  
Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor  
- 2 modules. Depth: 38,5 mm



**02951.B**  
Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor  
- 2 modules. Depth: 38,5 mm



**02951.BN**  
Touch screen thermostat for ON/OFF, PWM and PID temperature control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor  
- 2 modules. Depth: 38,5 mm

### By-me: temperature control - Electronic sensors



**20538**  
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.  
Depth: 40 mm



**20433**  
Electronic humidity sensor, 1 0-10 V or 4-20 mA output  
- 2 modules. Depth: 37 mm



**20432**  
Electronic temperature sensor.  
Depth: 24,4 mm



**20538.B**  
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.  
Depth: 40 mm



**20433.B**  
Electronic humidity sensor, 1 0-10 V or 4-20 mA output  
- 2 modules. Depth: 37 mm



**20432.B**  
Electronic temperature sensor.  
Depth: 24,4 mm



**20538.N**  
Temperature probe for ON/OFF, PWM, PID and dew point control, for 2- and 4-pipe systems, 3-speed/proportional fan coil control, 1 input for NTC sensor.  
Depth: 40 mm



**20433.N**  
Electronic humidity sensor, 1 0-10 V or 4-20 mA output  
- 2 modules. Depth: 37 mm



**20432.N**  
Electronic temperature sensor.  
Depth: 24,4 mm



**02965.1**  
Wired temperature sensor, NTC 10 k $\Omega$ , cable length 3 m

### By-me: temperature control - Weather station



**01546**  
Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

## Home automation

Grey

White

Next

### By-me: temperature control - Devices for DIN rail (60715 TH35) installation



**01400**  
Supply unit, 29 Vdc  
400 mA output,  
230 V~ 50/60 Hz,  
2 x 17,5 mm  
modules



**01401**  
Supply unit, 29 Vdc  
1280 mA output,  
120-230 V~ 50/60 Hz,  
8 x 17,5 mm modules



**01465**  
Climate control device for heating systems,  
power supply 120-230 V~ 50/60 Hz, 3  
inputs for PT100, PT1000 and NTC probes,  
1 mixer valve control output, 1 0-10 V or (0)  
4-20 mA output, 1 16 A 230 V~ change-over  
relay output, 6 x 17,5 mm modules

### By-me: energy management - Loads control



**20537**  
Actuator with relay output 16 A  
120-230 V~ 50/60 Hz with  
incorporated current sensor  
- 2 modules. Depth: 37 mm



**20537.B**  
Actuator with relay output 16 A  
120-230 V~ 50/60 Hz with  
incorporated current sensor  
- 2 modules. Depth: 37 mm



**20537.N**  
Actuator with relay output 16 A  
120-230 V~ 50/60 Hz with  
incorporated current sensor  
- 2 modules. Depth: 37 mm



**01451**  
Energy meter with  
incorporated current  
sensor, measurable  
powers up to 3680 W,  
flush mounting (retrofit)



**01452**  
Pulse counter interface  
for measuring data  
from devices fitted with  
pulse outputs, such as  
electricity, water and gas  
meters, flush mounting  
(retrofit)



**01457**  
Toroidal current sensor  
for load control and  
power measurement,  
hole diameter 7,5 mm,  
cable length 40 cm



**01458**  
Toroidal current sensor  
for load control and  
power measurement,  
hole diameter 19 mm,  
cable length 40 cm



**01459**  
Toroidal differential  
current sensor for power  
measurement, hole  
diameter 9 mm,  
cable length 40 cm

### By-me: energy management - Loads control - Devices for DIN rail (60715 TH35) installation



**01450**  
Energy meter, 3 x inputs  
toroidal sensor,  
25 W-100 kW,  
120-230 V 50/60 Hz,  
230/400 V 50/60 Hz,  
1 x 17,5 mm modules.  
Supplied with toroidal current  
sensor 01457



**01455**  
Load control module,  
3 x inputs toroidal  
sensor, 25 W-100 kW,  
120-230 V 50/60 Hz,  
230/400 V 50/60 Hz,  
1 x 17,5 mm modules.  
Supplied with toroidal  
current sensor 01457



**01456**  
Actuator, 16 A  
120-230 V~  
50/60 Hz relay  
output for toroidal  
differential  
current sensor,  
1 x 17,5 mm  
modules



**01400**  
Supply unit, 29 Vdc  
400 mA output,  
230 V~ 50/60 Hz,  
2 x 17,5 mm  
modules



**01401**  
Supply unit, 29 Vdc  
1280 mA output,  
120-230 V~ 50/60 Hz,  
8 x 17,5 mm modules

Grey

White

Next

### By-me: automation - Eikon Tactil devices



**21520**  
4 programmable buttons for 2 single controls or scenes - 2 modules.  
Depth: 38 mm



**21540**  
6 programmable buttons for 3 single controls or scenes - 2 modules.  
Depth: 38 mm

### By-me: automation - Labels



**21847**  
8 sheets of stickers with symbols and words for Eikon Tactil devices

### By-me: automation - Devices



**20520**  
2 simple push buttons - 2 modules.  
Depth: 26,5 mm



**20525**  
2 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.  
Depth: 37 mm



**20521**  
2 rocker push buttons - 2 modules.  
Depth: 26,5 mm



**20526**  
2 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 2 modules.  
Depth: 37 mm



**20527**  
2 rocker push buttons cosφ 0,6 2 A 120-230 V~ actuator for 1 rolling shutter - 2 modules.  
Depth: 37 mm



**20527.1**  
2 rocker push buttons + actuator 1 roller shutter laths positioning, cosφ 0,6 2 A 120-230 V~ - 2 modules.  
Depth: 37 mm



**20529**  
2 rocker push buttons + SLAVE-dimmer actuator - 2 modules. Depth: 37 mm



**20529.120**  
2 rocker push buttons + 120 V~ SLAVE-dimmer actuator - 2 modules. Depth: 37 mm

### By-me: automation - Devices



**20540**  
3 simple push buttons - 3 modules.  
Depth: 37 mm



**20545**  
3 simple push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.  
Depth: 37 mm



**20541**  
3 rocker push buttons - 3 modules.  
Depth: 37 mm



**20546**  
3 rocker push buttons + 8 A 120-230 V~ change-over relay output actuator - 3 modules.  
Depth: 37 mm



**20547**  
3 rocker push buttons + 3,5 A 120-230 V~ actuator for 1 rolling shutter - 3 modules.  
Depth: 37 mm







**20549**  
3 rocker push buttons + 40-300 W / 40-200 VA MASTER dimmer actuator - 3 modules.  
Depth: 37 mm





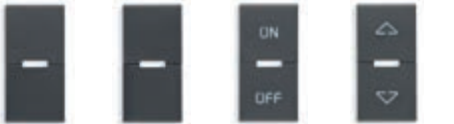

## Home automation

Grey	White	Next
------	-------	------

### By-me: automation - 1-module interchangeable buttons

 <p><b>20531</b> No symbol, for simple push buttons <b>20531.0</b> As above, customizable</p> <p><b>20531.S</b> No symbol, for rocker push buttons <b>20531.S0</b> As above, customizable</p> <p><b>20531.20</b> ON/OFF symbol for rocker push buttons</p> <p><b>20531.21</b> Arrows symbol, for rocker push buttons</p>	 <p><b>20531.B</b> No symbol, for simple push buttons <b>20531.0.B</b> As above, customizable</p> <p><b>20531.S.B</b> No symbol, for rocker push buttons <b>20531.S0.B</b> As above, customizable</p> <p><b>20531.20.B</b> ON/OFF symbol for rocker push buttons</p> <p><b>20531.21.B</b> Arrows symbol, for rocker push buttons</p>	 <p><b>20531.N</b> No symbol, for simple push buttons <b>20531.0.N</b> As above, customizable</p> <p><b>20531.S.N</b> No symbol, for rocker push buttons <b>20531.S0.N</b> As above, customizable</p> <p><b>20531.20.N</b> ON/OFF symbol for rocker push buttons</p> <p><b>20531.21.N</b> Arrows symbol, for rocker push buttons</p>
 <p><b>20531.1T</b> 1 name-plate, simple push buttons</p> <p><b>20531.2T</b> 2 name-plates, for rocker push buttons</p> <p><b>20531.25</b> Universal regulation symbols, for rocker push buttons</p>	 <p><b>20531.1T.B</b> 1 name-plate, simple push buttons</p> <p><b>20531.2T.B</b> 2 name-plates, for rocker push buttons</p> <p><b>20531.25.B</b> Universal regulation symbols, for rocker push buttons</p>	 <p><b>20531.1T.N</b> 1 name-plate, simple push buttons</p> <p><b>20531.2T.N</b> 2 name-plates, for rocker push buttons</p> <p><b>20531.25.N</b> Universal regulation symbols, for rocker push buttons</p>

### By-me: automation - 2-module interchangeable buttons

 <p><b>20532</b> No symbol, for simple push buttons <b>20532.0</b> As above, customizable</p> <p><b>20532.S</b> No symbol, for rocker push buttons <b>20532.S0</b> As above, customizable</p> <p><b>20532.20</b> ON/OFF symbol for rocker push buttons</p>	 <p><b>20532.B</b> No symbol, for simple push buttons <b>20532.0.B</b> As above, customizable</p> <p><b>20532.S.B</b> No symbol, for rocker push buttons <b>20532.S0.B</b> As above, customizable</p> <p><b>20532.20.B</b> ON/OFF symbol for rocker push buttons</p>	 <p><b>20532.N</b> No symbol, for simple push buttons <b>20532.0.N</b> As above, customizable</p> <p><b>20532.S.N</b> No symbol, for rocker push buttons <b>20532.S0.N</b> As above, customizable</p> <p><b>20532.20.N</b> ON/OFF symbol for rocker push buttons</p>
 <p><b>20532.21</b> Arrows symbol, for rocker push buttons</p> <p><b>20532.1T</b> 1 name-plate, for simple push buttons</p> <p><b>20532.25</b> Universal regulation symbols, for rocker push buttons</p>	 <p><b>20532.21.B</b> Arrows symbol, for rocker push buttons</p> <p><b>20532.1T.B</b> 1 name-plate, for simple push buttons</p> <p><b>20532.25.B</b> Universal regulation symbols, for rocker push buttons</p>	 <p><b>20532.21.N</b> Arrows symbol, for rocker push buttons</p> <p><b>20532.1T.N</b> 1 name-plate, for simple push buttons</p> <p><b>20532.25.N</b> Universal regulation symbols, for rocker push buttons</p>
























### By-me: automation - Interfaces

 <p><b>01475</b> 3 programmable digital inputs module for contacts without potential, 3 LED control outputs, By-me home automation, for flush mounting (backside)</p>	 <p><b>01476</b> 2 programmable digital inputs module for contacts without potential, 1 relay output for roller blind laths positioning, relay for cosφ 0.6 2 A 120-230 V~ motor, 2 LED control outputs, By-me home automation, for flush mounting (backside)</p>	 <p><b>01477</b> 2 programmable digital inputs module for contacts without potential, 1 NO 10 A 120-230 V~ 50/60 Hz light control relay output, 2 LED control outputs, By-me home automation, for flush mounting (backside)</p>
---	--	--







Grey	White	Next
------	-------	------

### By-me: automation - Devices for DIN rail (60715 TH35) installation

 <b>01470</b> Pre-program 9-input and 8-output module, NO 16 A 120-230 V~ 50/60 Hz relay outputs, light control, roller blind laths positioning and local control functions, 6 x 17,5 mm modules	 <b>01471</b> 4 16 A 120-230 V~ change-over relay outputs actuator, programmable for light control, roller blind laths positioning, fan-coil and local control, 4 x 17,5 mm modules	 <b>01850.2</b> Actuator with 16 A 120-230 V~ change-over relay output + push button for manual operating, 2 x 17,5 mm modules	 <b>Δ 01852.2</b> Actuator for 2 roller blinds with lath positioning, 16 A 120-230 V~ change-over relay output, push buttons for manual operating, 4 x 17,5 mm modules	 <b>01856</b> Actuator 0-10 Vdc for ballast control, 120-230 V~ change-over relay output, 3 x 17,5 mm modules	 <b>Δ 01853.120</b> MASTER dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules
 <b>Δ 01854.120</b> SLAVE dimmer, 40-500 W/VA, 40-300 VA, 120 V~, 3 x 17,5 mm modules	 <b>Δ 01857.120</b> MASTER dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules	 <b>Δ 01858.120</b> SLAVE dimmer, 40-400 VA, 120 V~, 4 x 17,5 mm modules	 <b>*01861</b> MASTER dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules	 <b>Δ*01862</b> SLAVE dimmer, 40-1000 W/VA, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules	 <b>01863</b> MASTER dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules
 <b>Δ 01864</b> SLAVE dimmer, 40-800 W/VA 50 Hz, 40-700 W/VA 60 Hz, 230 V~, MOSFET+TRIAC, 4 x 17,5 mm modules	 <b>*01865</b> MASTER dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules	 <b>Δ*01866</b> SLAVE dimmer, 40-700 VA, 230 V~ 50/60 Hz, MOSFET, 4 x 17,5 mm modules	 <b>01867</b> MASTER dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules	 <b>Δ 01868</b> SLAVE dimmer, 40-500 VA 50 Hz, 40-400 VA 60 Hz, 230 V~, MOSFET, 4 x 17,5 mm modules	 <b>01870</b> MASTER dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules <b>01870.120</b> As above, 120 V~
 <b>01871</b> SLAVE dimmer, 40-500 W, 40-300 VA, CFL 10-200 W, LED 3-200 W, 230 V~, 4 x 17,5 mm modules <b>01871.120</b> As above, 120 V~	 <b>01975</b> Actuator with 1-10 Vdc 30 mA output for LED control, 120-230 V~ 2,5 A change-over relay output, 120-230 V~ 50/60 Hz, 3 x 17,5 mm modules	 <b>01976</b> Actuator with 1-10 Vdc 30 mA output for LED control, 12-24 V 10 A relay output, 12-24 V~ 50/60 Hz or 12-24 Vdc, 3 x 17,5 mm modules	 <b>01466</b> Actuator with 4 (0)4-20 mA or 0-10 V proportional analogue outputs with max scalable voltage output, 120-230 V~ 50/60 Hz, 4 x 17,5 mm modules	 <b>01467</b> Device with 3 analogue signal inputs, 1 0-10 V or 4-20 mA input, 1 NTC sensor input, 1 brightness sensor 01530 input, 2 x 17,5 mm modules	

### By-me: automation - Electronic supply units

 <b>01874</b> 230 V~ 50 Hz, for controllable LED lamps, 12-24 Vdc <b>01874.120</b> As above, 120 V~	 <b>01875</b> 230 V~ 50 Hz, for controllable LED lamps, 350/500/700 mA <b>01875.120</b> As above, 120 V~	 <b>01876</b> 230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc <b>01876.120</b> As above, 120 V~	 <b>01877</b> 230 V~ 50 Hz, for controllable LED RGB lamps, 12-24 Vdc <b>01877.120</b> As above, 120 V~
---	---	---	--

Grey

White

Next

### By-me: automation - Electronic transformers (230-240 V~ - 50/60 Hz)



**Δ 01860.60**  
20-60 W,  
12 V~ (SELV) output



**01860.105**  
20-105 W,  
12 V~ (SELV) output

### By-me: automation - Devices



**20515**  
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules. Depth: 37 mm



**20518**  
Interface for traditional controls. Depth: 40 mm



**20515.B**  
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules. Depth: 37 mm



**20518.B**  
Interface for traditional controls. Depth: 40 mm



**20515.N**  
Interface for traditional switches 230 V~/12-24 Vac/dc - 2 modules. Depth: 37 mm



**20518.N**  
Interface for traditional controls. Depth: 40 mm



**20516**  
Remote control receiver - 2 modules. Depth: 26,5 mm



**20516.B**  
Remote control receiver - 2 modules. Depth: 26,5 mm



**20516.N**  
Remote control receiver - 2 modules. Depth: 26,5 mm



**01849**  
IR remote control, 14-channel



**20486**  
Orientable IR presence detector - 2 modules. Depth: 26,5 mm



**20485**  
IR presence detector - 2 modules. Depth: 26,5 mm



**Δ 20487**  
IR and microwaves presence detector - 2 modules. Depth: 26,5 mm



**20486.B**  
Orientable IR presence detector - 2 modules. Depth: 26,5 mm



**20485.B**  
IR presence detector - 2 modules. Depth: 26,5 mm



**20486.N**  
Orientable IR presence detector - 2 modules. Depth: 26,5 mm



**20485.N**  
IR presence detector - 2 modules. Depth: 26,5 mm



**Δ 20487.N**  
IR and microwaves presence detector - 2 modules. Depth: 26,5 mm



**00802.14**  
Orientable support - 2 modules



**00805.14**  
Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm



**00800.14**  
Frame for orientable support surface mounting



**00802**  
Orientable support - 2 modules



**00805**  
Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm



**00800**  
Frame for orientable support surface mounting



**00802.20**  
Orientable support - 2 modules



**00805.20**  
Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm



**00800.20**  
Frame for orientable support surface mounting

Grey	White	Next
------	-------	------

### By-me: automation - Devices

 <p><b>20534</b> Actuator 6 A 120-230 V~ change-over relay output. Depth: 40 mm</p> <p><b>20535</b> Actuator 16 A 120-230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p><b>20534.B</b> Actuator 6 A 120-230 V~ change-over relay output. Depth: 40 mm</p> <p><b>20535.B</b> Actuator 16 A 120-230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>	 <p><b>20534.N</b> Actuator 6 A 120-230 V~ change-over relay output. Depth: 40 mm</p> <p><b>20535.N</b> Actuator 16 A 120-230 V~ change-over relay output - 2 modules. Depth: 37 mm</p>
 <p><b>20584.1</b> Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm</p>	 <p><b>20584.1.B</b> Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm</p>	 <p><b>20584.1.N</b> Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm</p>

### By-me: radiofrequency home automation - EnOcean® technology (868 MHz)

 <p><b>20505</b> 2 flat rocker buttons with EnOcean® wireless connection, no battery, to complete with 20506 - 2 modules</p>		 <p><b>▲ 01796.1</b> EnOcean® multifunction actuator, NO 8 A 230 V~ relay output, supply voltage 230 V~ 50/60 Hz</p>	 <p><b>Δ 01796</b> Actuator with EnOcean® module, relay output, supply voltage 230 V~ 50 Hz</p>
 <p><b>20507</b> Frame for surface mounting of 20505, grey</p>	 <p><b>20507.B</b> Frame for surface mounting of 20505, white</p>	 <p><b>21507</b> Frame for surface mounting of 20505, only for Eikon Evo cover plate, grey</p>	 <p><b>21507.B</b> Frame for surface mounting of 20505, only for Eikon Evo cover plate, white</p>
 <p><b>20506</b> Pair of buttons for 20505 device, customizable</p>	 <p><b>20508</b> Bus-RF interface - 2 modules</p>	 <p><b>20506.B</b> Pair of buttons for 20505 device, customizable</p>	 <p><b>20508.B</b> Bus-RF interface - 2 modules</p>
 <p><b>20506.N</b> Pair of buttons for 20505 device, customizable</p>	 <p><b>20508.N</b> Bus-RF interface - 2 modules</p>		

Grey

White

Next

### By-me: safety and security - Emergency lighting devices



**02661**  
With high-efficiency LED, 230 V~ 50/60 Hz, rechargeable Ni-Cd battery and built-in 6/7-module frame. Depth: 44,7 mm

Δ **02661.120**  
As above, 120 V~



**01846**  
Emergency lighting management interface through Bus By-me



**00913**  
Ni-Cd 4,8 V 800 mAh spare rechargeable battery for 02661

### By-me: sound system - Devices



**20583**  
Spring connector for speaker. Depth: 19,4 mm



**20582**  
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules. Depth: 37 mm



**20583.B**  
Spring connector for speaker. Depth: 19,4 mm



**20582.B**  
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules. Depth: 37 mm



**20583.N**  
Spring connector for speaker. Depth: 19,4 mm



**20582.N**  
Audio input with 2 RCA connectors, automatic volume adjustment, incorporated line terminator - 2 modules. Depth: 37 mm



**20584.1**  
Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm



**20584.1.B**  
Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm



**20584.1.N**  
Interface for By-me devices and IR receiver, with 3 m of cable. Depth: 41 mm



Δ **20585**  
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules. Depth: 37 mm



Δ **20585.B**  
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules. Depth: 37 mm




Δ **20585.N**  
Docking station for iPod/iPhone device and supply unit - 2 + 2 modules. Depth: 37 mm



**20586**  
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



**20586.B**  
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



**20586.N**  
Microphone for selective or general call, voice activation function for monitoring children - 2 modules. Depth: 37 mm



**20581**  
2 rocker push buttons and 8 Ω 1+1 W amplifier, integrated line terminator, to complete with interchangeable buttons - 2 modules. Depth: 37 mm

## Home automation

Grey	White	Next
------	-------	------


### By-me: sound system - 1-module interchangeable buttons




**20531.23**  
Function/track change symbols, for rocker push buttons




**20531.24**  
O I and volume adjustment symbols, for rocker push buttons




**20531.23.B**  
Function/track change symbols, for rocker push buttons



**20531.24.B**  
O I and volume adjustment symbols, for rocker push buttons



**20531.23.N**  
Function/track change symbols, for rocker push buttons




**20531.24.N**  
O I and volume adjustment symbols, for rocker push buttons


### By-me: sound system - Speakers



**21588**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




**21588.B**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm




**21588.N**  
Passive speaker, 8 Ω 10 W, with built-in 8-module mounting frame. Depth: 48 mm



**20587**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



**20587.B**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



**20587.N**  
Passive speaker, 8 Ω 3 W - 3 modules. Depth: 40 mm



**01906**  
IP55 passive speaker, 8 Ω 30 W, for hollow walls and false ceiling installation



**01907**  
Passive speaker, 8 Ω 30 W, for hollow walls and false ceiling installation



**01908**  
Passive speaker, 8 Ω 30 W, orientable, for surface mounting

### By-me: sound system - Retrofit devices



**01903**  
Branch shunt for By-me devices, flush mounting (retrofit)



**01904**  
Branch shunt for sound system devices, flush mounting (retrofit)

Grey

White

Next

### By-me: sound system - Devices for DIN rail (60715 TH35) installation



**01900**  
FM radio tuner with RDS, coaxial connector for external FM antenna, built-in line terminator, 2 x 17,5 mm modules



**01901**  
Stereo amplifier, 2 outputs for sound diffusers 8 Ω 10+10 W, power supply 110-230 V~ 50/60 Hz, built-in line terminator, 6 x 17,5 mm modules



**01902**  
Bus line/sound diffusion decoupler for By-me power supply, built-in line terminator, 2 x 17,5 mm modules



**01400**  
Supply unit, 29 Vdc 400 mA output, 230 V~ 50/60 Hz, 2 x 17,5 mm modules



**01401**  
Supply unit, 29 Vdc 1280 mA output, 120-230 V~ 50/60 Hz, 8 x 17,5 mm modules

### By-me: sound system - Accessories and cables



**01840.B**  
Cable for sound system, halogen-free 2x0,50 mm<sup>2</sup>, rated operating voltage to earth 400 V, suitable for I category cables, blue - 100 m



**01839**  
Removable 2 screw terminals, for Bus system



## Accessories

### LED signalling units



**00935.A:** 12-24 V~ 0,1 W, amber  
**00935.G:** 12-24 V~ 0,1 W, green  
**00935.R:** 12-24 V~ 0,1 W, red  
**00935.B:** 12-24 V~ 0,1 W, blue  
**00935.W:** 12-24 V~ 0,1 W, white

**▲00936.250.A:** 250 V~ 50/60 Hz 0,35 W, amber  
**▲00936.250.G:** 250 V~ 50/60 Hz 0,35 W, green  
**▲00936.250.R:** 250 V~ 50/60 Hz 0,35 W, red  
**▲00936.250.B:** 250 V~ 50/60 Hz 0,35 W, blue  
**▲00936.250.W:** 250 V~ 50/60 Hz 0,35 W, white

**▲00936.120.A:** 120 V~ 50/60 Hz 0,2 W, amber  
**▲00936.120.G:** 120 V~ 50/60 Hz 0,2 W, green  
**▲00936.120.R:** 120 V~ 50/60 Hz 0,2 W, red  
**▲00936.120.B:** 120 V~ 50/60 Hz 0,2 W, blue  
**▲00936.120.W:** 120 V~ 50/60 Hz 0,2 W, white

**▲00936.A:** 110-250 V~ 0,5 W, amber  
**▲00936.G:** 110-250 V~ 0,5 W, green  
**▲00936.R:** 110-250 V~ 0,5 W, red  
**▲00936.B:** 110-250 V~ 0,5 W, blue  
**▲00936.W:** 110-250 V~ 0,5 W, white

### LED signalling units for axial switches



**00937.A:** 12-24 V~ 0,1 W, amber  
**00937.G:** 12-24 V~ 0,1 W, green  
**00937.R:** 12-24 V~ 0,1 W, red  
**00937.B:** 12-24 V~ 0,1 W, blue  
**00937.W:** 12-24 V~ 0,1 W, white

**00938.A:** 110-250 V~ 0,3 W, amber  
**00938.G:** 110-250 V~ 0,3 W, green  
**00938.R:** 110-250 V~ 0,3 W, red  
**00938.B:** 110-250 V~ 0,3 W, blue  
**00938.W:** 110-250 V~ 0,3 W, white

### Pre-wired signalling units



**00930**  
 250 V~ 0,3 W, red  
 suitable for British  
 standard socket outlets



**00931**  
 110-250 V~ 0,5 W,  
 amber

### E10 10x28 mm lamps



Neon:  
**▲14778**  
 110 V~ 0,5 W, red<sup>1</sup>  
**14779**  
 230 V~ 0,5 W, red<sup>1</sup>



Incandescent:  
**▲14770**  
 12 V~ 3 W, white<sup>1</sup>  
**14771**  
 24 V~ 3 W, white<sup>1</sup>  
**▲14774**  
 12 V~ 0,6 W, white<sup>1</sup>  
**▲14775**  
 24 V~ 1,2 W, white<sup>1</sup>  
**▲14776**  
 130 V~ 2,6 W, white<sup>1</sup>  
**14777**  
 230 V~ 3 W, white<sup>1</sup>

### Transparent cover for mounting frames



**21602.C**  
 For 2-module frame,  
 71 mm fixing centres



**21613.C**  
 For 3-module frame



**21614.C**  
 For 4-module frame



**21618.C**  
 For 8 (4+4)-module frame



**21617.C**  
 For 7-module frame

### Adaptors for DIN rail (60715 TH35) installation



**V51921**  
 1-module support



**V51922**  
 2-module support



**V51923**  
 3-module support

<sup>1</sup> The indicated colour is that of emitted light

Grey

White

Next

### Supervising - Control



**21553.2**  
10" IP multimedia video touch screen for Due Fili Plus video door system and By-me system supervising by web server



**21848.1**  
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



**21848.1.B**  
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



**21848.1.BN**  
Color touch screen, 4,3", Full Flat, for the control, 1 temperature sensor input, with built-in mounting frame for installation in 8-module mounting box. Depth: 50,4 mm



**21849.1**  
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



**21849.1.B**  
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



**21849.1.BN**  
Full Flat touch screen, for the room control, 1 temperature sensor input - 3 modules. Depth: 37 mm



**Δ 20849**  
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



**Δ 20849.B**  
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm



**Δ 20849.N**  
Monochrome touch screen, for the room control - 3 modules. Depth: 37 mm

### Supervising - Devices for DIN rail (60715 TH35) installation



**01545**  
Web server for local and remote control of the KNX system, 8 x 17,5 mm modules

Grey	White	Next
------	-------	------

### Automation - Control device



**21840**  
4 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 2 modules. Depth: 38 mm



**21860**  
6 independently programmable buttons for single controls or scenes, KNX standard, for Eikon Tactil - 3 modules. Depth: 38 mm



**20840**  
Control device with four independent push buttons, KNX standard, visible in darkness, to be completed with half-buttons - 2 modules. Depth: 20 mm

### Automation - 1-module interchangeable half-buttons



**20841**  
Four half-buttons without symbol



**20841.0**  
Four half-buttons, O symbol



**20841.1**  
Four half-buttons, I symbol



**20841.B**  
Four half-buttons without symbol



**20841.0.B**  
Four half-buttons, O symbol



**20841.1.B**  
Four half-buttons, I symbol



**20841.N**  
Four half-buttons without symbol



**20841.0.N**  
Four half-buttons, O symbol



**20841.1.N**  
Four half-buttons, I symbol



**20841.2**  
Four half-buttons, I O symbol



**20841.3**  
Four half-buttons, directional arrows symbol



**20841.4**  
Four half-buttons, regulation symbol



**20841.2.B**  
Four half-buttons, I O symbol



**20841.3.B**  
Four half-buttons, directional arrows symbol



**20841.4.B**  
Four half-buttons, regulation symbol




**20841.2.N**  
Four half-buttons, I O symbol



**20841.3.N**  
Four half-buttons, directional arrows symbol



**20841.4.N**  
Four half-buttons, regulation symbol



**20843**  
Four fixed half-buttons, without symbol



**20843.B**  
Four fixed half-buttons, without symbol



**20843.N**  
Four fixed half-buttons, without symbol

Grey	White	Next
------	-------	------

### Automation - 2-module interchangeable half-buttons


 <b>20842</b> Two half-buttons without symbol	 <b>20842.0</b> Two half-buttons, O symbol	 <b>20842.1</b> Two half-buttons, I symbol	 <b>20842.B</b> Two half-buttons without symbol	 <b>20842.0.B</b> Two half-buttons, O symbol	 <b>20842.1.B</b> Two half-buttons, I symbol	 <b>20842.N</b> Two half-buttons without symbol	 <b>20842.0.N</b> Two half-buttons, O symbol	 <b>20842.1.N</b> Two half-buttons, I symbol
 <b>20842.2</b> Two half-buttons, I O symbol	 <b>20842.3</b> Two half-buttons, directional arrows symbol	 <b>20842.4</b> Two half-buttons, regulation symbol	 <b>20842.2.B</b> Two half-buttons, I O symbol	 <b>20842.3.B</b> Two half-buttons, directional arrows symbol	 <b>20842.4.B</b> Two half-buttons, regulation symbol	 <b>20842.2.N</b> Two half-buttons, I O symbol	 <b>20842.3.N</b> Two half-buttons, directional arrows symbol	 <b>20842.4.N</b> Two half-buttons, regulation symbol
 <b>20844</b> Two fixed half-buttons, without symbol			 <b>20844.B</b> Two fixed half-buttons, without symbol			 <b>20844.N</b> Two fixed half-buttons, without symbol		

### Automation - Control

 <b>20850</b> Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm	 <b>00802.14</b> Orientable support - 2 modules	 <b>20850.B</b> Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm	 <b>00802</b> Orientable support - 2 modules	 <b>20850.N</b> Passive infrared presence detector, KNX standard - 2 modules. Depth: 26,5 mm	 <b>00802.20</b> Orientable support - 2 modules
 <b>00805.14</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 <b>00800.14</b> Frame for orientable support surface mounting	 <b>00805</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 <b>00800</b> Frame for orientable support surface mounting	 <b>00805.20</b> Adaptor for orientable support flush mounting - 2 modules. Depth: 36,5 mm	 <b>00800.20</b> Frame for orientable support surface mounting

Grey	White	Next
------	-------	------

### Access control - Eikon Tactil



**21457**  
Eikon Tactil touch transponder card reader, KNX standard, 2 relay outputs NO 4 A 24 V~, 2 inputs, 12-24V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 36,5 mm



**21666.70**  
Electronic plate for 21457, white diamond - 3 modules



**21666.71**  
Electronic plate for 21457, aqua - 3 modules



**21666.73**  
Electronic plate for 21457, pearl grey - 3 modules



**21666.76**  
Electronic plate for 21457, black diamond - 3 modules

### Access control - Device



**20457**  
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



**20453**  
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



**20457.B**  
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



**20453.B**  
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



**20457.N**  
Transponder card reader for installation outside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Supplied without transponder card. Depth: 37 mm



**20453.N**  
Transponder card reader with vertical pocket for installation inside rooms, KNX standard, 2 NO 4 A 24 V~ relay outputs, 2 inputs, power supply 12-24 V~ 50/60 Hz and 12-24 Vdc (SELV) - 3 modules. Depth: 37 mm



**20450**  
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



**20450.B**  
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



**20450.N**  
Transponder card reader/programmer, in 4-module table mounting box. To complete with 4-module cover plate



**01598**  
Programmable and customizable transponder card



**01835.H**  
Programmable and customizable transponder card

Grey	White	Next
------	-------	------

### Temperature control (heating and air-conditioning)



**02952**  
Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules.  
Depth: 37 mm



**02952.B**  
Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules.  
Depth: 37 mm



**02952.BN**  
Touch screen thermostat for ambient temperature control of 2 independent zones, KNX standard, NO 4 A 24 V~ relay output + 1 temperature sensor (20432 or 02965.1) input + 1 programmable digital input - 2 modules.  
Depth: 37 mm



**20432**  
Electronic temperature sensor.  
Depth: 24,4 mm



**20432.B**  
Electronic temperature sensor.  
Depth: 24,4 mm



**20432.N**  
Electronic temperature sensor.  
Depth: 24,4 mm

### Temperature control - Linear temperature sensor



**02965.1**  
Wired temperature sensor, NTC 10 kΩ, cable length 3 m



**01546**  
Weather station, KNX standard, power supply 12-32 Vdc or 12-24 Vac

### Brightness and presence sensors



**▲ 01527**  
IR presence detector, 360° motion range, ON/OFF and adjustment of lighting, heating, air conditioning, ventilation, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation.  
Dimensions: 80x80x45 mm



**▲ 01527.S**  
Adapter for 01527 detector ceiling installation



**▲ 01529.1**  
IR presence detector, 360° motion range, for ON/OFF lighting, 1-1000 Lux adjustable brightness range, KNX standard, for ceiling installation.  
Dimensions: 91x91x45 mm



**▲ 01529.1.S**  
Adapter for 01529.1 detector ceiling installation



**▲ 01529**  
IR presence detector, 360° motion range, for lightings depending on the brightness, 0-1000 Lux adjustable brightness range, KNX standard, for ceiling installation



**▲ 01529.S**  
Adapter for 01529 detector ceiling installation



**01530**  
Light sensor for dimmer 01528, KNX standard, ceiling installation



### Devices for DIN rail (60715 TH35) installation



**01510**  
4-channel digital input device, programmable for NO, NC and 120-230 V~ contacts, KNX standard, 2 x 17,5 mm modules



**01522**  
Input/output device, 4 NO 16 A 250 V~ relay outputs, 4 inputs for NO contacts, KNX standard, 4 x 17,5 mm modules



**01523**  
Actuator with 4 NO 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



**01521**  
Actuator with 12 10 A 250 V~ 50/60 Hz relay outputs for fluorescent lamps, KNX standard, 12 x 17,5 mm modules



**01524**  
Actuator for 2 roller shutters, 16 A 250 V~ relay outputs, KNX standard, 4 x 17,5 mm modules



**01525**  
Actuator for 8 roller shutters, 6 A 230 V~ 50/60 Hz relay outputs, KNX standard, 8 x 17,5 mm modules



**01535**  
Solenoid valve actuator, 6 230 V~ 0,5 A outputs, local control buttons, KNX standard, 4x17,5 mm modules



**01536**  
Actuator, 4 0-10 V or (0)4-20 mA analog-outputs, KNX standard, 4x17,5 mm modules



**01526**  
Dimmer 230 V~ 50/60 Hz for 2x300 W incandescent lamps, 2x300 VA ferromagnetic transformers, 2x300 VA electronic transformers, KNX standard, 4 x 17,5 mm modules



**01528**  
Dimmer, 2 inputs for 01530, 2 NO 16 A 250 V~ relay outputs, 2 1-10 V outputs, KNX standard, 4 x 17,5 mm modules



**01547.1**  
IP interface, KNX, 2 x 17,5 mm modules



**01547**  
IP interface, KNX, 2 x 17,5 mm modules



**01544**  
KNX DALI gateway, 8-channel for 16 lamps per channel, 6 x 17,5 mm modules



**01540**  
USB interface, KNX B-type, 2 x 17,5 mm modules



**01500.2**  
Power supply with Bus 30 Vdc 320 mA output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



**01500.1**  
Power supply with Bus 30 Vdc 320 mA output, supply voltage 85-265 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



**01501.2**  
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 120-240 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



**01501.1**  
Power supply with Bus 30 Vdc 640 mA output, 30 Vdc auxiliary output, supply voltage 230 V~ 50/60 Hz, with decoupling coil, KNX standard, 4 x 17,5 mm modules



**01504.2**  
Line coupler, KNX standard, 2 x 17,5 mm modules



**01504.1**  
Line coupler, KNX standard, 2 x 17,5 mm modules



**16887**  
Safety transformer, 230/12-24 V~ (SELV), 24 VA, 3 x 17,5 mm modules



**01514**  
Interface with 2 input or output programmable channels for LEDs, KNX standard



**01515**  
Interface with 4 input or output programmable channels for LEDs, KNX standard

### Software and interface



Software for Well-contact Plus system management

- 01589:** Well-contact Suite Light
- 01590:** Well-contact Suite Basic
- 01591:** Well-contact Suite Top
- 01592:** Well-contact Suite Client
- 01593:** Well-contact Suite Office
- 01594:** Well-contact Suite Client Office

**01595**  
Additional software for interfacing with existing management system



**01597**  
USB spare key for Well-contact Suite software



**01993**  
Hardware interface for By-me and Well-contact Plus touch screens + By-me system programming by Bus with RJ11 socket. It is necessary EasyTool Professional and touch screen configuration software

### KNX cable



**01890**  
2x2x0,8 mm cable, KNX standard

## EIKON TACTIL - Cover plates

### Luminosi (Bevelled crystal)



70 White diamond



71 Aqua



76 Black Diamond

## EIKON EVO - Cover plates

### Primari (Anodized aluminium)



01 Brilliant Aluminium



02 Next Grey



03 Lava Grey

### Esclusivi (Refined aluminium)



06 Black Sapphire



▲ 07.01 Silver



08 Titanium

### Scolpiti (Carved stone)



51 Carrara white



52 Natural split slate



53 Grey quartzite

# EIKON

## EIKON TACTIL - Cover plates



73 Pearl grey

Eikon Tactil:  
power simulation



## EIKON EVO - Cover plates



04 Neutral Bronze



05 Dark Bronze



09 Polished gold



10 Satin gold



▲ G09 Total polished gold



▲ G10 Total satin gold

## EIKON EVO - Cover plates

### Naturali

(Solid wood)



31 Italian walnut



32 White Oak



33 Wengé

### Luminosi

(Bevelled crystal)



70 White diamond



71 Aqua



72 Silver ice

### Raffinati

(Natural leather)



21 Cream



22 Tobacco

### Speciali

(Corian®)



41 Glacier ice

### Essenziali

(Total aluminium and crystal)



17 Total white



18 Total black



87 Total white diamond

## EIKON EVO - Cover plates



73 Pearl grey



74 Opal brown



75 Bronze mirror



76 Black diamond



88 Total black diamond

## EIKON CHROME - Classic cover plates

### Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C10 Metallic silver



C11 Metallic Siena



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

### Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



G24 Polished gold

### Inox

(Stainless steel)



C91 Brushed inox

### Wood

(Solid wood)



C31 African wengé



C32 White oak



C35 Italian walnut

### Glass

(Crystal)



C71 Black ice



C72 White ice



C81 Silver mirror

**Note:** changes in the grain, colour or evenness of the surface of cover plates made of solid wood and crystal are a prized feature and a guarantee of the material's authenticity.



## EIKON CHROME - Round cover plates

### Bright

(Varnished metal)



C01 Arctic white



C02 Antique white



C07 Metallic champagne



C08 Metallic titanium



C09 Metallic Atlantic grey



C10 Metallic silver



C12 Metallic anthracite



C13 Matt silver



C14 Matt titanium



C15 Matt anthracite

### Refined

(Refined metal)



G21 Satin gold



C22 Satin nickel



C23 Satin chrome



G24 Polished gold

### Inox

(Stainless steel)



C91 Brushed inox

### Wood

(Solid wood)



C32 White oak



C35 Italian walnut



C36 American cherrywood

## EIKON TOTAL LOOK - Classic cover plates

### Bright (Varnished metal)



B01 Arctic white



N13 Matt silver



15 Matt anthracite

## EIKON TOTAL LOOK - Round cover plates

### Bright

(Varnished metal)



B01 Arctic white










































N13 Matt silver







15 Matt anthracite






























## Eikon Tactil and Eikon Evo cover plates: guideline

		2-module		3-module		4-module		7-module
		Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Tactil	Eikon Evo	Eikon Evo
								
<b>Primari (Anodized aluminium)</b>								
	Brilliant Aluminium	-	21642.01	-	21653.01	-	21654.01	21657.01
	Next Grey	-	21642.02	-	21653.02	-	21654.02	21657.02
	Lava Grey	-	21642.03	-	21653.03	-	21654.03	21657.03
	Neutral Bronze	-	21642.04	-	21653.04	-	21654.04	21657.04
	Dark Bronze	-	21642.05	-	21653.05	-	21654.05	21657.05
<b>Esclusivi (Refined aluminium)</b>								
	Black Sapphire	-	21642.06	-	21653.06	-	21654.06	21657.06
	Silver	-	▲21642.07.01	-	▲21653.07.01	-	▲21654.07.01	▲21657.07.01
	Titanium	-	21642.08	-	21653.08	-	21654.08	21657.08
	Polished gold	-	21642.09	-	21653.09	-	21654.09	21657.09
	Total polished gold (with gold frame)	-	▲21642.G09	-	▲21653.G09	-	▲21654.G09	▲21657.G09
	Satin gold	-	21642.10	-	21653.10	-	21654.10	21657.10
	Total satin gold (with gold frame)	-	▲21642.G10	-	▲21653.G10	-	▲21654.G10	▲21657.G10
<b>Scolpiti (Carved stone)</b>								
	Carrara white	-	21642.51	-	21653.51	-	21654.51	21657.51
	Natural split slate	-	21642.52	-	21653.52	-	21654.52	21657.52
	Grey quartzite	-	21642.53	-	21653.53	-	21654.53	21657.53
<b>Naturali (Solid wood)</b>								
	Italian walnut	-	21642.31	-	21653.31	-	21654.31	21657.31
	White Oak	-	21642.32	-	21653.32	-	21654.32	21657.32
	Wengé	-	21642.33	-	21653.33	-	21654.33	21657.33
<b>Luminosi (Bevelled crystal)</b>								
	White diamond	21662.70	21642.70	21663.70	21653.70	21664.70	21654.70	21657.70
	Aqua	21662.71	21642.71	21663.71	21653.71	21664.71	21654.71	21657.71
	Silver ice	-	21642.72	-	21653.72	-	21654.72	21657.72
	Pearl grey	21662.73	21642.73	21663.73	21653.73	21664.73	21654.73	21657.73
	Opal brown	-	21642.74	-	21653.74	-	21654.74	21657.74
	Bronze mirror	-	21642.75	-	21653.75	-	21654.75	21657.75
	Black Diamond	21662.76	21642.76	21663.76	21653.76	21664.76	21654.76	21657.76
<b>Raffinati (Natural leather)</b>								
	Cream	-	21642.21	-	21653.21	-	21654.21	21657.21
	Tobacco	-	21642.22	-	21653.22	-	21654.22	21657.22
<b>Speciali (Corian®)</b>								
	Glacier ice	-	21642.41	-	21653.41	-	21654.41	21657.41
<b>Essenziali (Total aluminium and crystal)</b>								
	Total White	-	21642.17	-	21653.17	-	21654.17	21657.17
	Total Black	-	21642.18	-	21653.18	-	21654.18	21657.18
	Total White Diamond	-	21642.87	-	21653.87	-	21654.87	21657.87
	Total Black Diamond	-	21642.88	-	21653.88	-	21654.88	21657.88

## Eikon Tactil and Eikon Evo cover plates: guideline

8-module Eikon Evo	2+2-module (between centres 71 mm) Eikon Evo	2+2+2-module (between centres 71 mm) Eikon Evo	2+2+2+2-module (between centres 71 mm) Eikon Evo
			
21668.01	21643.01	21644.01	21669.01
21668.02	21643.02	21644.02	21669.02
21668.03	21643.03	21644.03	21669.03
21668.04	21643.04	21644.04	21669.04
21668.05	21643.05	21644.05	21669.05
21668.06	21643.06	21644.06	21669.06
▲21668.07.01	▲21643.07.01	▲21644.07.01	▲21669.07.01
21668.08	21643.08	21644.08	21669.08
21668.09	21643.09	21644.09	21669.09
▲21668.G09	▲21643.G09	▲21644.G09	▲21669.G09
21668.10	21643.10	21644.10	21669.10
▲21668.G10	▲21643.G10	▲21644.G10	▲21669.G10
21668.51	-	-	-
21668.52	-	-	-
21657.53	-	-	-
21668.31	-	-	-
21657.32	-	-	-
21668.33	-	-	-
21668.70	21643.70	21644.70	21669.70
21668.71	21643.71	21644.71	21669.71
21668.72	21643.72	21644.72	21669.72
21668.73	21643.73	21644.73	21669.73
21668.74	21643.74	21644.74	21669.74
21668.75	21643.75	21644.75	21669.75
21668.76	21643.76	21644.76	21669.76
21668.21	-	-	-
21668.22	-	-	-
21668.41	-	-	-
21668.17	21643.17	21644.17	21669.17
21668.18	21643.18	21644.18	21669.18
21668.87	21643.87	21644.87	21669.87
21668.88	21643.88	21644.88	21669.88

## Eikon Chrome cover plates: guideline















	2-module		2-central-module		3-module	
						
	Classic	Round	Classic	Round	Classic	Round
<b>Bright (Varnished metal)</b>						
 Artic white	20642.C01	20672.C01	20652.C01	20682.C01	20653.C01	20683.C01
 Antique white	20642.C02	20672.C02	20652.C02	20682.C02	20653.C02	20683.C02
 Metallic champagne	20642.C07	20672.C07	20652.C07	20682.C07	20653.C07	20683.C07
 Metallic titanium	20642.C08	20672.C08	20652.C08	20682.C08	20653.C08	20683.C08
 Metallic Atlantic grey	-	20672.C09	-	20682.C09	-	20683.C09
 Metallic silver	20642.C10	20672.C10	20652.C10	20682.C10	20653.C10	20683.C10
 Metallic Siena	20642.C11	-	20652.C11	-	20653.C11	-
 Metallic anthracite	20642.C12	20672.C12	20652.C12	20682.C12	20653.C12	20683.C12
 Matt silver	20642.C13	20672.C13	20652.C13	20682.C13	20653.C13	20683.C13
 Matt titanium	20642.C14	20672.C14	20652.C14	20682.C14	20653.C14	20683.C14
 Matt anthracite	20642.C15	20672.C15	20652.C15	20682.C15	20653.C15	20683.C15
<b>Refined (Refined metal)</b>						
 Satin gold (with gold frame)	20642.G21	20672.G21	20652.G21	20682.G21	20653.G21	20683.G21
 Satin nickel	20642.C22	20672.C22	20652.C22	20682.C22	20653.C22	20683.C22
 Satin chrome	-	20672.C23	-	20682.C23	-	20683.C23
 Polished gold (with gold frame)	20642.G24	20672.G24	20652.G24	20682.G24	20653.G24	20683.G24
<b>Inox (Stainless steel)</b>						
 Brushed inox	20642.C91	20672.C91	20652.C91	20682.C91	20653.C91	20683.C91
<b>Wood (Solid wood)</b>						
 African wengé	20642.C31	-	20652.C31	-	20653.C31	-
 White oak	20642.C32	20672.C32	20652.C32	20682.C32	20653.C32	20683.C32
 Italian walnut	20642.C35	20672.C35	20652.C35	20682.C35	20653.C35	20683.C35
 American cherrywood	-	20672.C36	-	20682.C36	-	20683.C36
<b>Glass (Crystal)</b>						
 Black ice	20642.C71	-	20652.C71	-	20653.C71	-
 White ice	20642.C72	-	20652.C72	-	20653.C72	-
 Silver mirror	20642.C81	-	20652.C81	-	20653.C81	-



















## Eikon Chrome cover plates: guideline

4-module		7-module		8-module	
					
Classic	Round	Classic	Round	Classic	Round
20654.C01	20684.C01	20657.C01	20687.C01	20668.C01	20698.C01
20654.C02	20684.C02	20657.C02	20687.C02	20668.C02	20698.C02
20654.C07	20684.C07	20657.C07	20687.C07	20668.C07	20698.C07
20654.C08	20684.C08	20657.C08	20687.C08	20668.C08	20698.C08
-	20684.C09	-	20687.C09	-	20698.C09
20654.C10	20684.C10	20657.C10	20687.C10	20668.C10	20698.C10
20654.C11	-	20657.C11	-	20668.C11	-
20654.C12	20684.C12	20657.C12	20687.C12	20668.C12	20698.C12
20654.C13	20684.C13	20657.C13	20687.C13	20668.C13	20698.C13
20654.C14	20684.C14	20657.C14	20687.C14	20668.C14	20698.C14
20654.C15	20684.C15	20657.C15	20687.C15	20668.C15	20698.C15
20654.G21	20684.G21	20657.G21	20687.G21	20668.G21	20698.G21
20654.C22	20684.C22	20657.C22	20687.C22	20668.C22	20698.C22
-	20684.C23	-	20687.C23	-	20698.C23
20654.G24	20684.G24	20657.G24	20687.G24	20668.G24	20698.G24
20654.C91	20684.C91	20657.C91	20687.C91	20668.C91	20698.C91
20654.C31	-	20657.C31	-	20668.C31	-
20654.C32	20684.C32	20657.C32	20687.C32	20668.C32	20698.C32
20654.C35	20684.C35	20657.C35	20687.C35	20668.C35	20698.C35
-	20684.C36	-	20687.C36	-	20698.C36
20654.C71	-	20657.C71	-	20668.C71	-
20654.C72	-	20657.C72	-	20668.C72	-
20654.C81	-	20657.C81	-	20668.C81	-
























## Eikon Total Look cover plates: guideline

	2-module		2-central-module		3-module		4-module	
								
	Classic	Round	Classic	Round	Classic	Round	Classic	Round
<b>Bright (Varnished metal)</b>								
 Artic white	20642.B01	20672.B01	20652.B01	20682.B01	20653.B01	20683.B01	20654.B01	20684.B01
 Matt silver	20642.N13	20672.N13	20652.N13	20682.N13	20653.N13	20683.N13	20654.N13	20684.N13
 Matt anthracite	20642.15	20672.15	20652.15	20682.15	20653.15	20683.15	20654.15	20684.15
<b>Reflex (Technopolymer)</b>								
 Reflex graphite	20642.40	-	20652.40	-	20653.40	-	20654.40	-
 Reflex ice (with white frame)	20642.B41	-	20652.B41	-	20653.B41	-	20654.B41	-
 Reflex anthracite	▲20642.42	-	▲20652.42	-	▲20653.42	-	▲20654.42	-


















	7-module		8-module		14-module		21-module		Panel mounting 1-module		Panel mounting 2-module	
												
	Classic	Round	Classic	Round	Classic	Classic	Classic	Round	Classic	Round		
<b>Bright (Varnished metal)</b>												
 Artic white	20657.B01	20687.B01	20668.B01	20698.B01	20660.01*	20661.01*	20666.B01	20696.B01	20667.B01	20697.B01		
 Matt silver	20657.N13	20687.N13	20668.N13	20698.N13	20660.13*	20661.13*	20666.N13	20696.N13	20667.N13	20697.N13		
 Matt anthracite	20657.15	20687.15	20668.15	20698.15	20660.15*	20661.15*	20666.15	20696.15	20667.15	20697.15		
<b>Reflex (Technopolymer)</b>												
 Reflex graphite	20657.40	-	20668.40	-	-	-	-	-	-	-		
 Reflex ice (with white frame)	20657.B41	-	20668.B41	-	-	-	-	-	-	-		
 Reflex anthracite	▲20657.42	-	▲20668.42	-	-	-	-	-	-	-		

\* Technopolymer






























## Eikon Tactil and Eikon Evo cover plates for British standard: guideline

		2-module		3-module/monobloc	5-module/monobloc	
		Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
						
<b>Primari (Anodized aluminium)</b>						
	Brilliant Aluminium	-	21642.01	21648.01	-	21649.01
	Next Grey	-	21642.02	21648.02	-	21649.02
	Lava Grey	-	21642.03	21648.03	-	21649.03
	Neutral Bronze	-	21642.04	21648.04	-	21649.04
	Dark Bronze	-	21642.05	21648.05	-	21649.05
<b>Esclusivi (Refined aluminium)</b>						
	Black Sapphire	-	21642.06	21648.06	-	21649.06
	Silver	-	▲21642.07.01	▲21648.07.01	-	▲21649.07.01
	Titanium	-	21642.08	21648.08	-	21649.08
	Polished gold	-	21642.09	21648.09	-	21649.09
	Total polished gold (with gold frame)	-	▲21642.G09	▲21648.G09	-	▲21649.G09
	Satin gold	-	21642.10	21648.10	-	21649.10
	Total satin gold (with gold frame)	-	▲21642.G10	▲21648.G10	-	▲21649.G10
<b>Scolpiti (Carved stone)</b>						
	Carrara white	-	21642.51	21648.51	-	21649.51
	Natural split slate	-	21642.52	21648.52	-	21649.52
	Grey quartzite	-	21642.53	21648.53	-	21649.53
<b>Naturali (Solid wood)</b>						
	Italian walnut	-	21642.31	21648.31	-	21649.31
	White Oak	-	21642.32	21648.32	-	21649.32
	Wengé	-	21642.33	21648.33	-	21649.33




## Eikon Tactil and Eikon Evo cover plates for British standard: guideline

	2-module		3-module/monobloc	5-module/monobloc	
	Eikon Tactil	Eikon Evo	Eikon Evo	Eikon Tactil	Eikon Evo
					
<b>Luminosi (Bevelled crystal)</b>					
 White diamond	21662.70	21642.70	21648.70	▲21667.70	21649.70
 Aqua	21662.71	21642.71	21648.71	▲21667.71	21649.71
 Silver ice	-	21642.72	21648.72	-	21649.72
 Pearl grey	21662.73	21642.73	21648.73	▲21667.73	21649.73
 Opal brown	-	21642.74	21648.74	-	21649.74
 Bronze mirror	-	21642.75	21648.75	-	21649.75
 Black Diamond	21662.76	21642.76	21648.76	▲21667.76	21649.76
<b>Raffinati (Natural leather)</b>					
 Cream	-	21642.21	21648.21	-	21649.21
 Tobacco	-	21642.22	21648.22	-	21649.22
<b>Speciali (Corian®)</b>					
 Glacier ice	-	21642.41	21648.41	-	21649.41
<b>Essenziali (total aluminium and crystal)</b>					
 Total White	-	21642.17	21648.17	-	21649.17
 Total Black	-	21642.18	21648.18	-	21649.18
 Total White Diamond	-	21642.87	21648.87	-	21649.87
 Total Black Diamond	-	21642.88	21648.88	-	21649.88


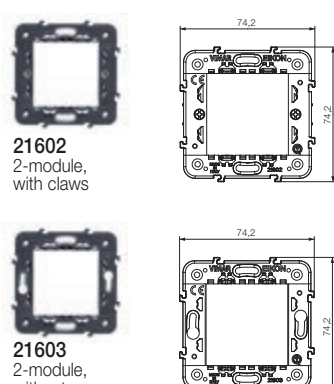







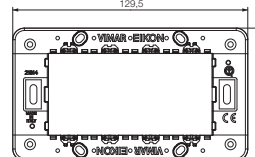

## Eikon Chrome cover plates for British standard: guideline

	2-module		3-module/monobloc		5-module/monobloc	
						
	Classic	Round	Classic	Round	Classic	Round
<b>Bright (Varnished metal)</b>						
 Artic white	20647.C01	20677.C01	20648.C01	20678.C01	20649.C01	20679.C01
 Antique white	20647.C02	20677.C02	20648.C02	20678.C02	20649.C02	20679.C02
 Metallic champagne	20647.C07	20677.C07	20648.C07	20678.C07	20649.C07	20679.C07
 Metallic titanium	20647.C08	20677.C08	20648.C08	20678.C08	20649.C08	20679.C08
 Metallic Atlantic grey	-	20677.C09	-	20678.C09	-	20679.C09
 Metallic silver	20647.C10	20677.C10	20648.C10	20678.C10	20649.C10	20679.C10
 Metallic Siena	20647.C11	-	20648.C11	-	20649.C11	-
 Metallic anthracite	20647.C12	20677.C12	20648.C12	20678.C12	20649.C12	20679.C12
 Matt silver	20647.C13	20677.C13	20648.C13	20678.C13	20649.C13	20679.C13
 Matt titanium	20647.C14	20677.C14	20648.C14	20678.C14	20649.C14	20679.C14
 Matt anthracite	20647.C15	20677.C15	20648.C15	20678.C15	20649.C15	20679.C15
<b>Refined (Refined metal)</b>						
 Satin gold (with gold frame)	20647.G21	20677.G21	20648.G21	20678.G21	20649.G21	20679.G21
 Satin nickel	20647.C22	20677.C22	20648.C22	20678.C22	20649.C22	20679.C22
 Satin chrome	-	20677.C23	-	20678.C23	-	20679.C23
 Polished gold (with gold frame)	20647.G24	20677.G24	20648.G24	20678.G24	20649.G24	20679.G24
<b>Inox (Stainless steel)</b>						
 Brushed inox	20647.C91	20677.C91	20648.C91	20678.C91	20649.C91	20679.C91
<b>Wood (Solid wood)</b>						
 African wengé	20647.C31	-	20648.C31	-	20649.C31	-
 White oak	20647.C32	20677.C32	20648.C32	20678.C32	20649.C32	20679.C32
 Italian walnut	20647.C35	20677.C35	20648.C35	20678.C35	20649.C35	20679.C35
 American cherrywood	-	20677.C36	-	20678.C36	-	20679.C36
<b>Glass (Crystal)</b>						
 Black ice	20647.C71	-	20648.C71	-	20649.C71	-
 White ice	20647.C72	-	20648.C72	-	20649.C72	-
 Silver mirror	20647.C81	-	20648.C81	-	20649.C81	-





## Eikon Total Look cover plates for British standard: guideline

<b>Bright (Varnished metal)</b>						
 Artic white	20647.B01	20677.B01	20648.B01	20678.B01	20649.B01	20679.B01
 Matt silver	20647.N13	20677.N13	20648.N13	20678.N13	20649.N13	20679.N13
 Matt anthracite	20647.15	20677.15	20648.15	20678.15	20649.15	20679.15

## Eikon Tactil: standard types of mounting


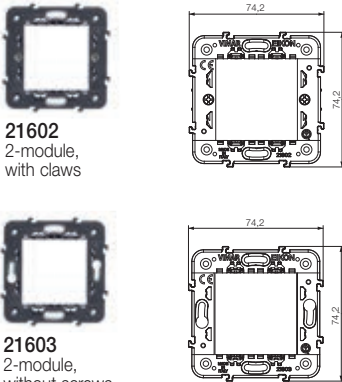





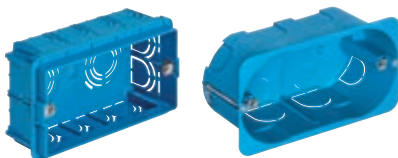

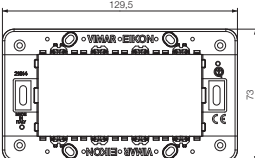



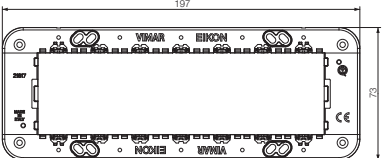

Module	Box	Frame	Cover plate*
2 for $\varnothing$ 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>  <p><b>V71001</b> For masonry GW 650 °C, light blue <b>V71001.AU</b> GW 960 °C, black</p> <p><b>V71701</b> For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p><b>21602</b> 2-module, with claws</p> <p><b>21603</b> 2-module, without screws</p>	 <p><b>21662...</b> 2-module Dimensions: 95,4x95,4 mm</p>
3	<p>Flush mounting</p>  <p><b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black</p> <p><b>V71703</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21613</b> 3-module, with screws</p> 	 <p><b>21663...</b> 3-module Dimensions: 118x106 mm</p>
4	<p>Flush mounting</p>  <p><b>V71304</b> For masonry GW 650 °C, light blue <b>V71304.AU</b> GW 960 °C, black</p> <p><b>V71704</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21614</b> 4-module, with screws</p> 	 <p><b>21664...</b> 4-module Dimensions: 140,5x106 mm</p>

## Eikon Tactil: British standard mounting

Module	Box	Frame	Cover plate*
5	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p><b>20609'</b> 5-module, with screws M 3,5</p> 	 <p><b>▲21667...</b> 5-module Dimensions: 163x95,4 mm</p>



## Eikon Evo: standard types of mounting



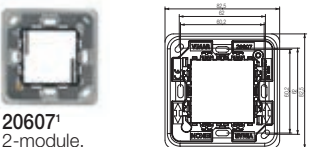


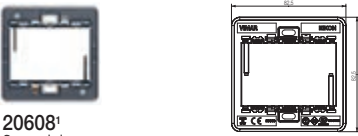






Module	Box	Frame	Cover plate*
2 for $\varnothing$ 60 mm or 56x56 mm mounting box	<p>Flush mounting</p>  <p><b>V71001</b> For masonry GW 650 °C, light blue <b>V71001.AU</b> GW 960 °C, black</p> <p><b>V71701</b> For hollow walls, for frame without claws, GW 850 °C, light blue</p>	 <p><b>21602</b> 2-module, with claws</p> <p><b>21603</b> 2-module, without screws</p>	 <p><b>21642...</b> 2-module Dimensions: 95,4x95,4 mm</p>
3	<p>Flush mounting</p>  <p><b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black</p> <p><b>V71703</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21613</b> 3-module, with screws</p> 	 <p><b>21653...</b> 3-module Dimensions: 118x106 mm</p>
4	<p>Flush mounting</p>  <p><b>V71304</b> For masonry GW 650 °C, light blue <b>V71304.AU</b> GW 960 °C, black</p> <p><b>V71704</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21614</b> 4-module, with screws</p> 	 <p><b>21654...</b> 4-module Dimensions: 140,5x106 mm</p>
7	<p>Flush mounting</p>  <p><b>V71306</b> For masonry GW 650 °C, light blue <b>V71306.AU</b> GW 960 °C, black</p> <p><b>V71706</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21617</b> 7-module, with screws</p> 	 <p><b>21657...</b> 7-module Dimensions: 208x106 mm</p>

\* Cover plates range, page 82

## Eikon Evo: standard types of mounting

Module	Box	Touch screen/frame	Cover plate*
<p>8 (4+4)</p>	<p>Flush mounting</p>  <p><b>V71318</b> For masonry GW 650 °C, light blue</p> <p><b>V71718</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21554</b> 4,3" Full Flat video touch screen, grey <b>21554.B:</b> white <b>21554.BN:</b> neutral</p>  <p><b>21511...</b> 4,3" touch screen Full Flat, with built-in 8-module mounting frame</p> <p><b>21848...</b> Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p>  <p><b>21618</b> 4+4-module, with claws</p>	 <p><b>21668...</b> 8-module (4+4) Dimensions: 155,2x155,2 mm</p>  <p>Cover plate rotated at a 90° angle</p>
<p>8 (4+4)</p>	<p>Semi-flush mounting</p>  <p><b>V71318</b> For masonry GW 650 °C, light blue</p> <p><b>V71718</b> For hollow walls GW 850 °C, light blue</p>	 <p><b>21553.2</b> 10" IP multimedia video touch screen</p>	 <p><b>21665...</b> For multimedia video touch screen Dimensions: 345x250 mm Material and finishing availability: <b>21665.11:</b> Aluminium <b>21665.70:</b> White diamond <b>21665.76:</b> Black Diamond</p>






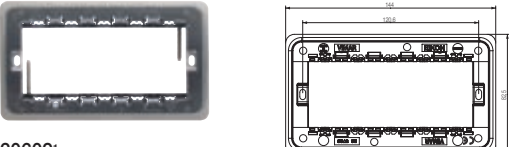
## Eikon Evo: British standard mounting

Module	Box	Frame	Cover plate*
1 and 2	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p><b>20606<sup>1</sup></b> 1-module, with screws M 3,5, grey</p> <p><b>20606.B<sup>1</sup></b> 1-module, with screws M 3,5, white</p> <p><b>20606.N<sup>1</sup></b> 1-module, with screws M 3,5, Next</p>  <p><b>20607<sup>1</sup></b> 2-module, with screws M 3,5</p>	 <p><b>21642...</b> 2-module Dimensions: 95,4x95,4 mm</p>
3 and mono-bloc	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p><b>20608<sup>1</sup></b> 3-module, with screws M 3,5</p>  <p><b>20215.L</b> Example of monobloc device</p> <p><b>20017.L</b> Example of monobloc device</p>	 <p><b>21648...</b> 3-module Dimensions: 95,4x95,4 mm</p>
5 and mono-bloc	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p><b>20609<sup>1</sup></b> 5-module, with screws M 3,5</p>  <p><b>20222.L</b> Example of monobloc device in horizontal mounting</p> <p><b>20291</b> Example of monobloc device in vertical mounting</p>	 <p><b>21649...</b> 5-module Dimensions: 163x95,4 mm</p>







\* Cover plates range, page 82

<sup>1</sup> Items conform to BS 5733





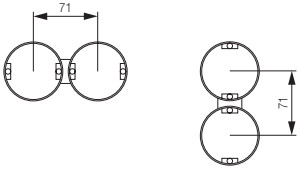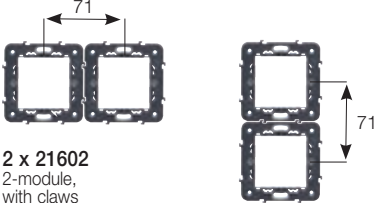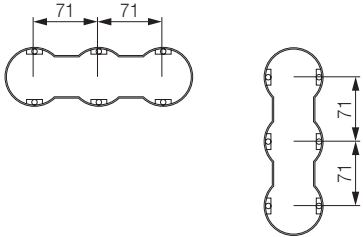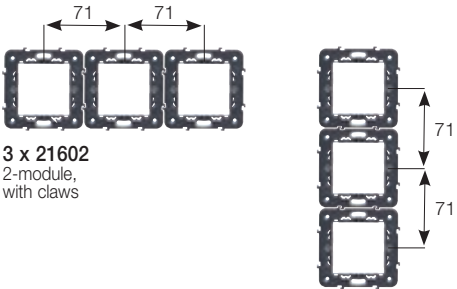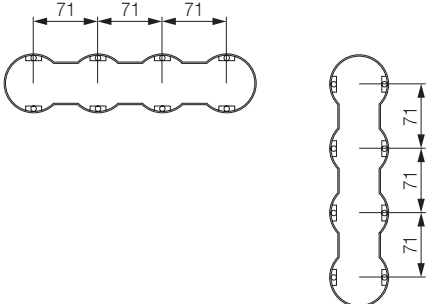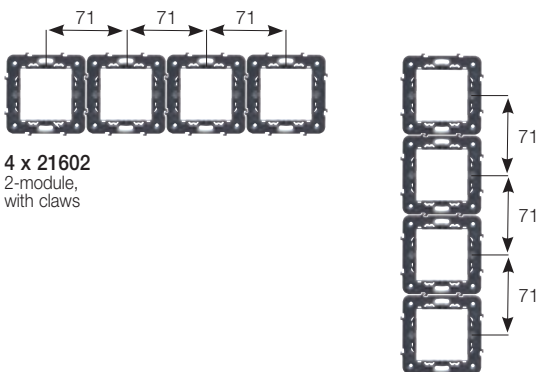



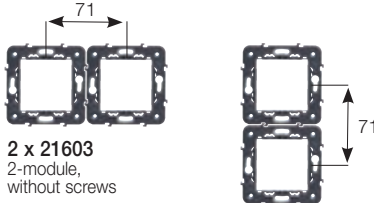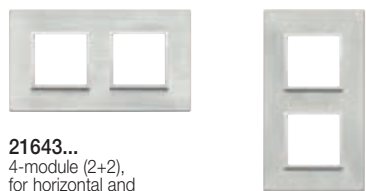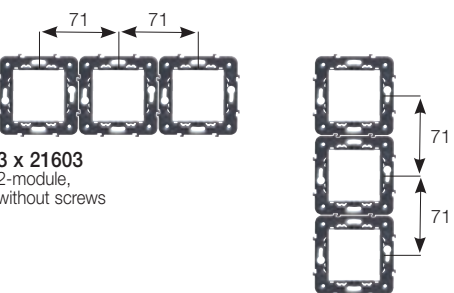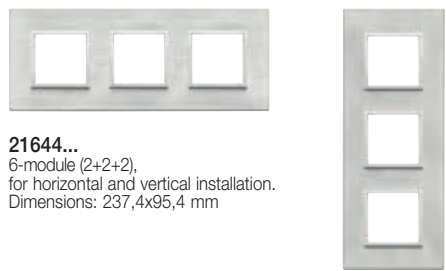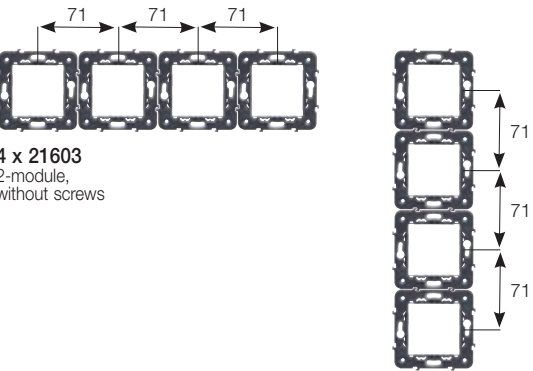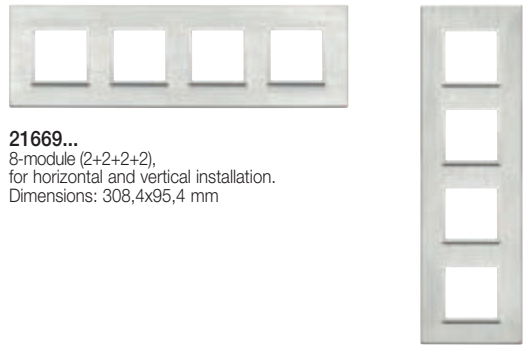





## Eikon Evo: 71 mm between centres installation

Module	Box	Frame
<p><b>2+2</b> 71 mm between centres</p>		 <p><b>2 x 21602</b> 2-module, with claws</p>
<p><b>2+2+2</b> 71 mm between centres</p>		 <p><b>3 x 21602</b> 2-module, with claws</p>
<p><b>2+2+2+2</b> 71 mm between centres</p>		 <p><b>4 x 21602</b> 2-module, with claws</p>

## Eikon Evo: 71 mm between centres installation















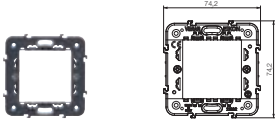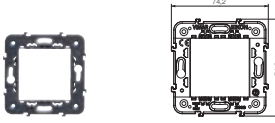








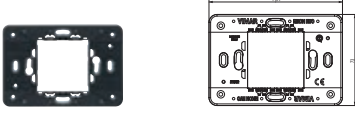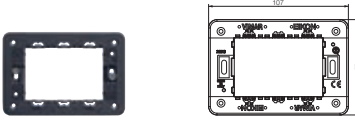






	Cover plate*
 <p><b>2 x 21603</b> 2-module, without screws</p>	 <p><b>21643..</b> 4-module (2+2), for horizontal and vertical installation. Dimensions: 166,4x95,4 mm</p>
 <p><b>3 x 21603</b> 2-module, without screws</p>	 <p><b>21644..</b> 6-module (2+2+2), for horizontal and vertical installation. Dimensions: 237,4x95,4 mm</p>
 <p><b>4 x 21603</b> 2-module, without screws</p>	 <p><b>21669..</b> 8-module (2+2+2+2), for horizontal and vertical installation. Dimensions: 308,4x95,4 mm</p>
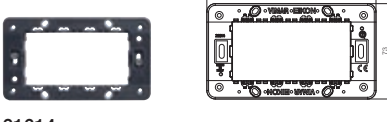
## Eikon Chrome and Eikon Total Look: standard types of mounting

Module	Box	
2 for ø 60 mm mounting box	<p>Flush mounting</p>  <p><b>V71001</b> For masonry GW 650 °C, light blue <b>V71001.AU</b> GW 960 °C, black</p>  <p><b>V71701</b> For hollow walls, for frame without claws, GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p><b>09971.A</b> 43,5 deep, RAL 9001 ivory <b>09971.01:</b> white <b>Δ 09971.SL:</b> Silver</p>
	<p>Flush mounting</p>  <p><b>V71303</b> For masonry GW 650 °C, light blue <b>V71303.AU</b> GW 960 °C, black</p>  <p><b>V71703</b> For hollow walls GW 850 °C, light blue</p>	<p>Surface mounting</p>  <p><b>09983</b> 35-45 mm deep, grey <b>09983.01:</b> white <b>Δ 09983.N:</b> Next</p>  <p><b>09975.A</b> 43,5 mm deep, RAL 9001 ivory <b>09975.01:</b> white <b>Δ 09975.SL:</b> Silver</p>  <p><b>Δ 09976.04</b> 30 mm deep, Idea white <b>09976.14:</b> Idea grey</p>
4	<p>Flush mounting</p>  <p><b>V71304</b> For masonry GW 650 °C, light blue <b>V71304.AU</b> GW 960 °C, black</p>  <p><b>V71704</b> For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p><b>20784</b> 4-module table mounting box, grey <b>20784.B</b> As above, white <b>20784.N</b> As above, Next</p>
7	<p>Flush mounting</p>  <p><b>V71306</b> For masonry GW 650 °C, light blue <b>V71306.AU</b> GW 960 °C, black</p>  <p><b>V71706</b> For hollow walls GW 850 °C, light blue</p>	<p>Table mounting</p>  <p><b>20787</b> 7-module table mounting box, grey <b>20787.B</b> As above, white <b>20787.N</b> As above, Next</p>

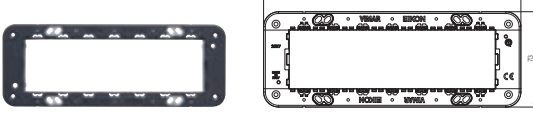

## Eikon Chrome and Eikon Total Look: standard types of mounting

Frame	Eikon Chrome cover plate*	Eikon Total Look cover plate*
 <p><b>21602</b> 2-module, with claws</p>  <p><b>21603</b> 2-module, without screws</p>	<p><b>Classic</b></p>  <p><b>20642...</b> 2-module Dimensions: 85x85 mm</p> <p><b>Round</b></p>  <p><b>20672...</b> 2-module Dimensions: 80x80 mm</p> <p><b>Classic</b></p>  <p><b>20652...</b> 2-central-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20682...</b> 2-central-module Dimensions: 120x80 mm</p>	<p><b>Classic</b></p>  <p><b>20642...</b> 2-module Dimensions: 85x85 mm</p> <p><b>Round</b></p>  <p><b>20672...</b> 2-module Dimensions: 80x80 mm</p> <p><b>Classic</b></p>  <p><b>20652...</b> 2-central-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20682...</b> 2-central-module Dimensions: 120x80 mm</p>
 <p><b>21612</b> 2-central-module, with screws</p>  <p><b>21613</b> 3-module, with screws</p>	<p><b>Classic</b></p>  <p><b>20652...</b> 2-central-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20682...</b> 2-central-module Dimensions: 120x80 mm</p> <p><b>Classic</b></p>  <p><b>20653...</b> 3-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20683...</b> 3-module Dimensions: 120x80 mm</p>	<p><b>Classic</b></p>  <p><b>20652...</b> 2-central-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20682...</b> 2-central-module Dimensions: 120x80 mm</p> <p><b>Classic</b></p>  <p><b>20653...</b> 3-module Dimensions: 120x85 mm</p> <p><b>Round</b></p>  <p><b>20683...</b> 3-module Dimensions: 120x80 mm</p>
 <p><b>21614</b> 4-module, with screws</p>	<p><b>Classic</b></p>  <p><b>20654...</b> 4-module Dimensions: 142x85 mm</p> <p><b>Round</b></p>  <p><b>20684...</b> 4-module Dimensions: 142x80 mm</p>	<p><b>Classic</b></p>  <p><b>20654...</b> 4-module Dimensions: 142x85 mm</p> <p><b>Round</b></p>  <p><b>20684...</b> 4-module Dimensions: 142x80 mm</p>
 <p><b>21617</b> 7-module, with screws</p>	<p><b>Classic</b></p>  <p><b>20657...</b> 7-module Dimensions: 206x85 mm</p> <p><b>Round</b></p>  <p><b>20687...</b> 7-module Dimensions: 210x80 mm</p>	<p><b>Classic</b></p>  <p><b>20657...</b> 7-module Dimensions: 206x85 mm</p> <p><b>Round</b></p>  <p><b>20687...</b> 7-module Dimensions: 210x80 mm</p>






















\* Cover plates range, from page 86 and 88

Δ Available until stocks last

## Eikon Chrome and Eikon Total Look: standard types of mounting

Module	Box
8 (4+4)	<p><b>Flush mounting</b></p>  <p><b>V71318</b> For masonry GW 650 °C, light blue</p>  <p><b>V71718</b> For hollow walls GW 850 °C, light blue</p>
	<p><b>Flush mounting</b></p>  <p><b>V71318</b> For masonry GW 650 °C, light blue</p>  <p><b>V71718</b> For hollow walls GW 850 °C, light blue</p>
	<p><b>Table mounting</b></p>  <p><b>20788</b> 8-module with Classic and Round frame, grey <b>20788.B</b> white <b>20788.N</b> Next Dimensions: 141x151,9x135 mm</p>
1	<p><b>Panel mounting</b></p>  <p><b>16776.AU</b> GW 960 °C</p>
2	 <p><b>16776.AU x 2</b> GW 960 °C</p>
14 (7+7)	<p><b>Flush mounting</b></p>  <p><b>V71320</b> For masonry GW 650 °C, light blue</p>  <p><b>V71720</b> For hollow walls GW 850 °C, light blue</p>
	<p><b>Surface mounting</b></p>  <p><b>09920.01</b>, bianco</p>
21 (7+7+7)	<p><b>Flush mounting</b></p>  <p><b>V71321</b> For masonry GW 650 °C, light blue</p>
	<p><b>Surface mounting</b></p>  <p><b>09921.01</b>, White Δ <b>09921.14</b>, Grey Δ <b>09921.N</b>, Next</p>



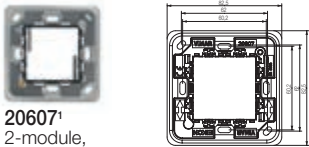






## Eikon Chrome and Eikon Total Look: standard types of mounting

Touch screen/frame	Eikon Chrome cover plate*	Eikon Total Look cover plate*
 <p><b>21554</b> 4,3" Full Flat video touch screen, grey <b>21554.B:</b> white <b>21554.BN:</b> neutral</p>	<p><b>Classic</b></p>  <p><b>20668...</b> 8-module Dimensions: 142x156 mm</p>	<p><b>Classic</b></p>  <p><b>20668...</b> 8-module Dimensions: 142x156 mm</p>
	<p><b>Round</b></p>  <p><b>20698...</b> 8-module Dimensions: 142x151 mm</p>	<p><b>Round</b></p>  <p><b>20698...</b> 8-module Dimensions: 142x151 mm</p>
 <p><b>21511...</b> 4,3" touch screen Full Flat, with built-in 8-module mounting frame <b>21848...</b> Touch screen a colori, 4,3" Full Flat Well-contact Plus, with built-in 8-module mounting frame</p>  <p><b>21618</b> 4+4-module, with claws</p>	<p><b>Classic</b></p>  <p><b>20668...</b> 8-module Dimensions: 142x156 mm</p> <p><b>Round</b></p>  <p><b>20698...</b> 8-module Dimensions: 142x151 mm</p>	<p><b>Classic</b></p>  <p><b>20668...</b> 8-module Dimensions: 142x156 mm</p> <p><b>Round</b></p>  <p><b>20698...</b> 8-module Dimensions: 142x151 mm</p>
 <p><b>20626</b> 1-module, with screws</p>		<p><b>Classic</b>      <b>Round</b></p>  <p><b>20666...</b> 1-module Dimensions: 40x80 mm</p>  <p><b>20696...</b> 2-module Dimensions: 40x80 mm</p>
 <p><b>20627</b> 2-module, with screws</p>		<p><b>Classic</b>      <b>Round</b></p>  <p><b>20667...</b> 2-module Dimensions: 40x137 mm</p>  <p><b>20697...</b> 2-module Dimensions: 40x137 mm</p>
 <p><b>20620</b> 14-module (7+7), with screws</p>	<p><b>Classic</b></p>  <p><b>20660...</b> 14-module (7+7), technopolymer, with signalling tags. Dimensions: 207x153 mm</p>	
 <p><b>20621</b> 21-module (7+7+7), with screws</p>	<p><b>Classic</b></p>  <p><b>20661...</b> 21-module (7+7+7), technopolymer, with signalling tags. Dimensions: 207x223 mm</p>	







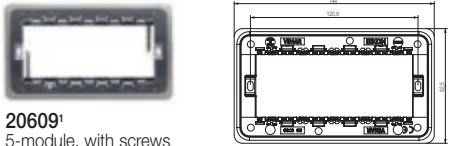
\* Cover plates range, from page 86 and 88

Δ Available until stocks last

## Eikon Chrome and Eikon Total Look: British standard mounting

Module	Box	Frame
<p><b>1 and 2</b></p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p><b>20606<sup>1</sup></b> 1-module, with screws M 3,5, grey</p> <p><b>20606.B<sup>1</sup></b> 1-module, with screws M 3,5, white</p> <p><b>20606.N<sup>1</sup></b> 1-module, with screws M 3,5, Next</p>  <p><b>20607<sup>1</sup></b> 2-module, with screws M 3,5</p>
<p><b>3 and monobloc</b></p>	<p>Flush mounting</p>  <p>1-gang mounting box Fixing centres: 60,3 mm</p>	 <p><b>20608<sup>1</sup></b> 3-module, with screws M 3,5</p>  <p><b>20215.L</b> Example of monobloc device</p> <p><b>20017.L</b> Example of monobloc device</p>
<p><b>5 and monobloc</b></p>	<p>Flush mounting</p>  <p>2-gang mounting box Fixing centres: 120,6 mm</p>	 <p><b>20609<sup>1</sup></b> 5-module, with screws M 3,5</p>  <p><b>20222.L</b> Example of monobloc device in horizontal mounting</p> <p><b>20291</b> Example of monobloc device in vertical mounting</p>

## Eikon Chrome and Eikon Total Look: British standard mounting

Eikon Chrome cover plate*	Eikon Total Look cover plate*
<p><b>Classic</b></p>  <p><b>20647'...</b> 2-module Dimensions: 95x95x9 mm</p>	<p><b>Classic</b></p>  <p><b>20647'...</b> 2-module Dimensions: 95x95x9 mm</p>
<p><b>Round</b></p>  <p><b>20677'...</b> 2-module Dimensions: 95x95x9 mm</p>	<p><b>Round</b></p>  <p><b>20677'...</b> 2-module Dimensions: 95x95x9 mm</p>
<p><b>Classic</b></p>  <p><b>20648'...</b> Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>	<p><b>Classic</b></p>  <p><b>20648'...</b> Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>
<p><b>Round</b></p>  <p><b>20678'..</b> Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>	<p><b>Round</b></p>  <p><b>20678'..</b> Cover plate for horizontal and vertical installation. Dimensions: 95x95x9 mm Cover plate for monobloc device mounting, only.</p>
<p><b>Classic</b></p>  <p><b>20649'...</b> 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>	<p><b>Classic</b></p>  <p><b>20649'...</b> 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>
<p><b>Round</b></p>  <p><b>20679'...</b> 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>	<p><b>Round</b></p>  <p><b>20679'...</b> 5-module For horizontal and vertical installation. Dimensions: 155x95x9 mm</p>

\* Cover plates range, from page 86

## Customization

### Devices and cover plates customization

Vimar laser technology allows the reproduction of any name, logotype or trademark, with absolute precision and indelebility, even for small quantities.

#### Information

- all devices, buttons and cover plates are customized depending on conditions described below;
- **Eikon Tactil**  
all cover plates shown in the area highlighted in grey can be customised, with the exception of the **Pearl grey** cover plate (73);
- **Eikon Evo**  
the following finishings of cover plates are not customizable: **Crystal: silver ice (72), pearl grey (73), opal brown (74), bronze mirror (75); Natural leather: tobacco (22);**
- **Eikon Chrome**  
the following finishings of cover plates are not customizable: **Bright: matt titanium (.C14); Glass: black ice (.C71), silver mirror (.C81);**
- **Wooden cover plate** customization: prices and quantities agreed with the commercial networks.
- if the required customisation is listed in the table "Standard symbols and wordings", indicate the relative code in addition to the required item code, **if it is not included in the table contact the Vimar sales office to check availability;**
- the customisation is **visible in the dark**: on the bottom of rocker controls and buttons, with the standard symbols available from the catalogue; in the centre on axial controls and buttons, with the standard symbols available from the catalogue; on the bottom of interchangeable rocker buttons (20031..., 20032... e 20033...) with customisable spaces; in the centre of interchangeable axial buttons (20131.0... and 20132.0...) with customisable spaces;

- the interchangeable axial buttons (20131.0..., 20132.0...) can be customised by applying a Mylar label in the given space. For large quantities, customisations not included in the "Standard symbols and wordings" or for laser-printed customisations, please contact the Vimar sales department.

#### Laser customization advantages

- indelible engraving that does not deteriorate over time;
- high-precision reproduction even of very fine lines and complex images;
- service available even for minimal quantities;
- possibility of ordering the same customization at different times with identical results.

#### The few limits of technology

- it is not possible to reproduce coloured images.

#### What to supply

- a printout of the image to be reproduced, in black-and-white line drawing scaled 2 or 3 times larger than the finished size;
- an image in EPS, TIFF or JPEG format of the subject to be reproduced.

#### Things to avoid

- do not provide photocopies;
- do not fax the image to be reproduced, because the low definition of the fax makes it impossible to reproduce the customization with the high quality of laser system.

#### How to proceed

- enclose (without paper clips, staples or adhesive tape) or send the image to be reproduced;
- deliver all the documentation to your area wholesaler/distributor, who will then forward it to Vimar.

### Standard symbols and wordings (♦ symbols already on product catalogue)

S20.018	S20.019	S20.020	S20.021	S20.022	S20.023	S20.024	S20.025	S20.026	S20.027	S20.028	♦S20.029	S20.030	S20.031	S20.032	S20.033	S20.034
														♦S20.049	S20.050	S20.051
S20.052	♦S20.053	♦S20.054	♦S20.055	♦S20.056	♦S20.057	♦S20.058	♦S20.059	♦S20.060	S20.061	S20.062	S20.063	S20.064	S20.065	S20.066	S20.067	S20.068
				♦S20.073	♦S20.074	S20.075	S20.076	S20.077	S20.078	S20.079	S20.080	S20.081	S20.082	S20.083	S20.084	S20.085
														♦S20.117	S20.118	S20.119
LIGHT	OPEN	CLOSE	ALARM	COME IN	BACK	STAIRS	BATHROOM	CELLAR	STOREROOM	ATTIC	TERRACE	OUTSIDE	GARDEN	GARAGE	GENERAL	■ ■ ■
S20.188.EN	S20.189.EN	S20.190.EN	S20.191.EN	S20.192.EN	S20.193.EN	S20.194.EN	S20.195.EN	S20.196.EN	S20.197.EN	S20.198.EN	S20.199.EN	S20.200.EN	S20.201.EN	S20.202	S20.203.EN	S20.204



# EIKON

## Customization



### Examples of Eikon Tactil custom controls



Eikon Tactil




Eikon Tactil control with adhesive labels 21847


### Available symbols in Mylar labels 21847 (Some symbols are repeated several times)

						ON	OFF					...
Repetition	10	1	1	1	1	5	5	1	2	1	1	8
Repetition	3	2	4	5	2	4	1	1	1	3	3	2
Repetition	1	1	1	1	1	1	3	3	1	1	1	2
												APRE
Repetition	1	1	1	1	1	1	1	1	1	2	2	1
												CHIUDE
Repetition	1	1	2	2	2	2	2	2	2	2	2	1
	1	2	3	4	5	6						
Repetition	1	1	1	1	1	1	1	2	2	1	2	2
Repetition	3	3	3	2	3	2	2	2	2	2	2	2
Repetition	2	2	1	1	2	1	1	1	1	1	1	1
			GENERALE	GENERAL	ALARM	LUCE	LIGHT	BAGNO	BATHROOM	OPEN	CLOSE	ESTERNO
Repetition	2	2	1	1	2	1	1	1	1	1	1	1
	SCALE	STAIRS	GARAGE	GIARDINO	GARDEN	TERRAZZA	TERRACE	OUTSIDE	ATTIC	SOLAIO	CANTINA	CELLAR
Repetition	1	1	2	1	1	1	1	1	1	1	1	1


### Customizable positions




21662...



21663...



21664...



21666...

### Examples of Eikon Evo, Eikon Chrome and Eikon Total Look custom buttons and controls



Eikon Evo



Eikon Chrome



Eikon Total Look




Lightable button with chosen symbol




Customised controls and buttons


### Customizable positions



Eikon Evo cover plates




Eikon Chrome and Eikon Total Look cover plates



**Interchangeable controls and buttons.**  
Laser-printed customisation that is **not visible** in the dark, at the top and in the centre.



**Interchangeable axial controls and buttons.**  
Laser-printed customisation that is **not visible** in the dark, at the top and bottom.



**Interchangeable buttons 20031..., 20032..., 20033...**  
Customization **not visible** in darkness at the top and centre, **visible** in darkness at the bottom with 14x7 mm area.



**Interchangeable axial buttons 20131.0... and 20132.0...**  
Laser-printed customisation that is **not visible** in the dark, at the top and bottom. In the centre, the customisation is **visible** in the dark, and is done using Mylar labels (see warnings).

### Smart card customization

The rear of the card can be customised on request, by providing a digital image of the subject in eps, tiff or jpg format.



## Isoset

### Modules

### IP40

### IP55

### IP55 cover

1



2



3



4



6



\*\*) For white version, add to the basic code: .01  
For granite version, add to the basic code: .14

8



10



12



14



16

