



Industrial telephone Type A24

The weatherproof A24 is suited for dusty and moist environments. It is designed for DTMF and pulse dialling as well as a PABX device and end device. Its keypad consists of 16 durable buttons that can also optionally be ordered to light up. A continuously adjustable fixture protects the telephone handset against shocks. An integrated volume amplifier can be added on. We are also happy to offer the A24 with two custom buttons that can be assigned other functions as desired.

Industrial telephone

Type A24




| Technical data | |
|------------------------|---|
| Storage temperature | -40°C - +70°C |
| Operating temperature | -25°C - +55°C |
| Relative humidity | max 95% |
| Casing enclosure | IP 66 |
| Dialling modes | DTMF or pulse* |
| CE conformity | EN 50081, EN 50082, EN 60950, access based on CTR21 |
| Tone signalling volume | 60 dB(A) - 90 dB(A) at 1 m distance |
| Functions | depending on number of keys, 4-6 functions, redialling, mute, receiver amplification 4x + 3dB, headset*, line ground*/flash, 4 direct outward dialling buttons, open listening, abbreviated dialing |
| Connection terminals | clamping range 0,08 - 2,5 mm ² single-, multi- and fine wire |
| Cable gland | M16, Ø 5-10 mm Dummy plugs: 1 x M12*, 1 x M16 Handset: M12Flex, Ø 3-6,5 mm |
| Material | Casing: polyamide Locking screws: V4A (1.4571) |

* not available at A24/Basic

| Model | Order no. |
|---|-----------|
| with spiral handset cord | 01.01000 |
| with spiral handset cord + 1 special key | 01.01001 |
| with spiral handset cord + 2 special keys | 01.01002 |
| with stainless steel handset cord | 01.02000 |
| with stainless steel handset cord + 1 special key | 01.02001 |
| with stainless steel handset cord + 2 special keys | 01.02002 |
| with lighted keypad + spiral handset cord | 01.03000 |
| with lighted keypad + spiral handset cord + 1 special key | 01.03001 |
| with lighted keypad + spiral handset cord + 2 special keys | 01.03002 |
| with lighted keypad + stainless steel handset cord | 01.04000 |
| with lighted keypad + stainless steel handset cord + 1 special key | 01.04001 |
| with lighted keypad + stainless steel handset cord + 2 special keys | 01.04002 |
| A24/Basic with spiral handset cord | 01.41000 |
| A24/Basic with stainless steel handset cord | 01.42000 |

Dimensioned drawing

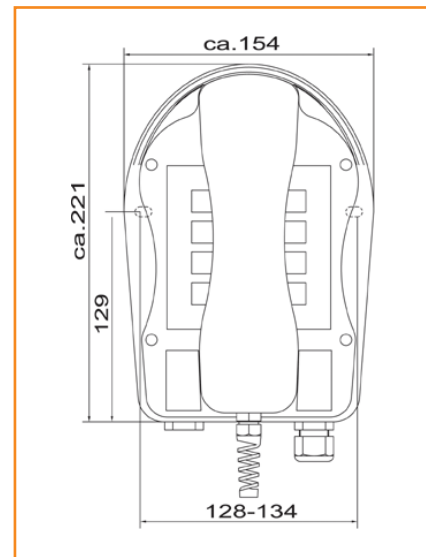

Dimensions:
221 (height) x 154 (width) x 105 (depth) mm

Distance between holes for mounting:
128-134 mm

Weight:
approx. 1250 g