



GENERAL GUIDELINES FOR MARINE CHOCK DESIGNERS: CHOCKFAST® ORANGE & GRAY

Revised: 08/2018

GENERAL GUIDELINES

Chockfast Orange and Gray are engineered epoxy chocking materials that are used to create permanent cast-in-place machinery supports for all sizes and types of main engines and marine auxiliary equipment. Because it conforms precisely to any surface profile, Chockfast eliminates the need for machining of foundations and mounting surfaces as well as the fitting of the old-style steel or cast iron chocks.

Chockfast chocks must always be located around one or more machinery hold down bolts. Any thickness of chock can be cast. For ease of installation, 12mm to 45 mm (1/2" to 1-3/4") thick chocks are recommended dimensions for design purposes.

Good chock design requires that all edges and corners of mounting pads and foundations penetrating the Chockfast be rounded. Also, all grease, oil, mill scale, rust, flaking paint, burs, and welding slag must be removed. If necessary, a thin coat of epoxy primer may be applied to the machinery base and foundation to prevent rusting.

SELECTING THE RIGHT EPOXY

There are two grades of Chockfast used to mount marine machinery; Chockfast Orange and Chockfast Gray. Selecting the right grade depends on the machinery's alignment requirements and the chock's normal operating temperature.

Precisely Aligned Equipment is equipment that cannot tolerate movement after installation greater than 0.127mm (0.005 inches) under static stresses of up to 4.4 N/mm² (638 psi). Examples of this class of machinery include main propulsion engines, and reduction gears.

Normal Operating Temperature is the temperature that the chocks will see during typical operating conditions and is usually equal to the temperature of the equipment mounting pads.

Where maintaining precise equipment alignment is required OR when the operating temperatures will typically be over 52°C (125°F), Chockfast Orange must be used.

Where alignment does NOT have to be maintained precisely AND the operating temperature is below 52°C (125°F), Chockfast Gray may be used. Examples of this class of machinery include winches, pumps, skid mounted diesel generators and other self-contained equipment.

The following instructions apply to normal Chockfast installations on steel foundations where chock thickness is within the typical range, as shown in Table 1 below. For pours outside of this range, please contact the local representative of the Worldwide Distributor Network or ITW Performance Polymers.

Table 1: Standard Thickness of Chockfast Pours

Chockfast Orange	12 mm – 100 mm	½” – 4”
Chockfast Gray	12 mm – 50 mm	½” – 2”

DESIGN CALCULATIONS

- PRECISELY ALIGNED EQUIPMENT

- The stress on the chocks due to the weight of the machinery is known as Deadweight Loading. Deadweight Loading may be limited by the vessel’s classification society and must be determined prior to designing the chocks. Standard values for Maximum Deadweight Loading are from 0.7 N/mm² to 0.9 N/mm² (100 psi to 130 psi).
- When designing precisely aligned chocks, first calculate the Minimum Required Chock Area. This is calculated by dividing the Total Machinery Weight (including water, oil, accessories, etc.) by the Allowed Deadweight Loading. Design the chocks to cover at least this minimum area and follow the General Guidelines for chock design. Remember that this is the MINIMUM area. Keep in mind that this area may need to increase while working through the calculations. The Actual Chock Area should be equal or greater than the Minimum Chock Area and be based on what is physically possible.

$$\begin{matrix} \text{Total Machinery} & & \text{Maximum Allowed} & & \text{Minimum Required} \\ \text{Weight} & & \text{Deadweight Loading} & & \text{Chock Area} \\ \text{(N or lbs)} & \div & \text{(N/mm}^2 \text{ or lbs/in}^2) & = & \text{(mm}^2 \text{ or in}^2) \end{matrix}$$

- Next, find out the Total Static Stress allowed on the chocks by the classification society. Total Allowed Static Stress is the sum of Deadweight Loading Stress and the Bolt Stress caused by the tension on all mounting bolts. Chocks are typically designed to allow a maximum stress of 3.4 N/mm² (500 psi) on chocks for precisely aligned machinery. However, most classification societies approve a sliding scale of Static Stress vs. Chock Operating Temperature. For example, a number of societies approve 4.41 N/mm² (640 psi) at 80°C (176°F).

Some classification societies approve maximum load conditions for chocking main and auxiliary engines, reduction gears, thrust bearings, stern tubes, and deck machinery based on the maximum anticipated service temperature the chocks are expected to experience. The following table, Table 2, shows the specific allowable chock load (surface pressure) from Lloyd’s Register.

Table 2: Maximum Allowable Static Stress based on Maximum Service Temperature from Lloyd’s Register

Max. Service Temperature [°C (°F)]:	Max. Allowable Static Stress [MPa (psi)]:
20 (68)	10.0 (1450)
30 (86)	9.4 (1363)
40 (104)	8.7 (1262)
50 (122)	8.0 (1160)
60 (140)	7.0 (1015)
70 (158)	5.9 (856)
80 (176)	5.0 (725)
90 (194)	2.3 (334)

For Classification Societies other than Lloyd’s Register, please refer to the relevant Type Approval Certificate for specific loading allowances.

- The Total Allowable Bolt Stress is what is left over after subtracting the Actual Deadweight Loading from the Total Allowed Static Stress given by the class society.

$$\begin{matrix} \text{Max. Allowable} & \text{Actual Deadweight} & \text{Total Allowable Bolt} \\ \text{Static Stress} & \text{Loading} & \text{Stress} \\ \text{(N/mm}^2 \text{ or lbs/in}^2) & - \text{(N/mm}^2 \text{ or lbs/in}^2) & = \text{(N/mm}^2 \text{ or lbs/in}^2) \end{matrix}$$

- Multiply the *Total Allowable Bolt Stress* by the *Effective Chock Area* to get the *Maximum Chock Stress Allowed just due to Bolt Tension*. This is also known as *Total Bolt Tension* and is caused by all bolts holding the machinery in place. Then determine the *individual Tension per Bolt*, divide Total Bolt Tension by the number of bolts.

$$\begin{matrix} \text{Maximum Bolt} & \text{Actual Chock} & \text{Total Bolt Tension} \\ \text{Tension} & \text{Area} & \text{(N or lbs)} \\ \text{(N/mm}^2 \text{ or lbs/in}^2) & \times \text{(mm}^2 \text{ or in}^2) & = \text{(N/mm}^2 \text{ or lbs/in}^2) \end{matrix}$$

$$\begin{matrix} \text{Total Bolt Tension} & \text{Number of Bolts} & \text{Tension per Bolt} \\ \text{(N or lbs)} & & \text{(N or lbs)} \\ & \div & = \end{matrix}$$

- To ensure the machine will not move, the Total Bolt Tension must total at least 2.5 times the machinery weight. To ensure the bolts stay tight, the Tension per Bolt divided by the cross-sectional area of the bolt must be at least 46.3 N/mm² (6720 psi).
- Finally, calculate the Bolt Torque required that will achieve this Bolt Tension. While there is no absolute relationship between tightening torque and bolt tension, there is a generally accepted formula for calculating bolt torque. Using one of the following formulas calculate the torque required to achieve that tension. As a check, torque and tension must be greater than the minimum values shown in **Table 4**.

$$\text{Torque (N.m)} = \frac{0.2 \times \text{Tension (N)} \times \text{Bolt Dia (mm)}}{1000}$$

$$\text{Torque (lbf.feet)} = \frac{0.2 \times \text{Tension (lbf)} \times \text{Bolt Dia (inches)}}{12}$$

DESIGN CALCULATIONS - NON-PRECISELY ALIGNED EQUIPMENT

Chocks for equipment that do not require precise alignment can be made from either Chockfast Orange OR Chockfast Gray.

In designing chocks for non-precisely aligned equipment, Deadweight Loading is not limited and, unless it is significant, need not be considered in the calculations. The primary consideration is the Total Continuous Static Stress on the chocks caused by the Bolt Tension. Bolt Tension is directly related to the Operational Loading of the equipment.

Operational Loading is the force applied to the equipment during its normal operation. For example, the load applied by the line on a capstan, the wire on a winch, the chain on a windlass, or the load on a crane. Operational Loading is classified into 3 groups by how frequently the load is applied: Continuous, Intermittent and Shock. The following table shows the Maximum Static Stress allowed on chocks used under non-precisely aligned machinery and equipment.

Table 3: Maximum Allowable Static Stress [MPa (psi)]

	Continuous	Intermittent	Shock
Chockfast Orange	8.27 (1,200)	24.52 (3,556)	68.95 (10,000)
Chockfast Gray	5.52 (800)	20.00 (2,900)	40.00 (5,800)

Static Stress on a chock is the sum of the engine deadweight and the tension on all bolts. The Total Bolt Tension on a piece of equipment may be increased up to a point where the Static Stress reaches either the Maximum Static Stress allowed in Table 3 above or where the Total Bolt Tension is equal to 80% of the Proof Load of the mounting bolt.

If there are any design questions or concerns regarding the design limits of the chocks under specific equipment, please contact the local representative of the Worldwide Distributor Network or ITW Performance Polymers.

Table 4: Minimum Bolt Torque & Tension

Bolt Diameter (mm)	Minimum Torque (N.m)	Minimum Tension (N)	Bolt Diameter (mm)	Minimum Torque (ft.lbs)	Minimum Tension (lbs)
12	29	5,590	1/2	20	1,320
14	39	7,551	5/8	30	2,062
18	69	12,503	7/8	75	4,042
20	98	15,396	1	90	5,279
22	118	18,633	1 1/8	126	6,681
24	137	22,212	1 1/4	172	8,248
27	157	29,077	1 3/8	230	9,980
30	216	35,990	1 1/2	300	11,877
33	294	44,571	1 5/8	380	13,939
36	393	54,476	1 3/4	475	16,166
39	491	62,861	1 7/8	580	18,558
42	589	70,069	2	705	21,115
45	736	81,738	2 1/8	845	23,836
48	883	91,937	2 1/4	1,005	26,723
52	1,080	103,754	2 3/8	1,180	29,775
56	1,374	122,583	2 1/2	1,375	32,991
60	1,669	138,911	2 5/8	1,600	36,373
64	1,963	153,229	2 3/4	1,830	39,920
68	2,454	180,266	2 7/8	2,090	43,631

NOTE: Table 4 is the **MINIMUM** desirable bolt tensions for various size bolts. **It is normally advantageous to use more than the minimum shown here.** When the bolt material is unknown, a safe Maximum Bolt Tension and Torque is 3 times the value given in this table.

CHOCK DESIGN - EXAMPLE CALCULATIONS

There are six questions that must be answered when designing chocks for precisely aligned marine equipment. They are:

- 1) What is the Minimum Required Chock area?
- 2) What is the Tension allowed on each bolt?
- 3) Is the tension adequate to hold the equipment in place?
- 4) Is the tension adequate to keep the bolts tight?
- 5) What torque is required to achieve this tension?
- 6) How much Chockfast is needed?

The following example shows how these calculations are made for Precisely Aligned Equipment.

EXAMPLE – Chock Calculations for a Precisely Aligned Engine	
<p>Equipment: Main Engine Weight: 75000 kg (165,347 lbs)</p> <p>Chocks: (10) 30 cm x 19.5 cm (11.8" x 7.7") (4) 32.5 cm x 19.5 cm (12.8" x 7.7") (4) 35 cm x 19.5 cm (13.8" x 7.7") Chock will be 35 mm (1.4") thick</p>	<p>Bolts: (18) M42 (1-5/8") Grade 8 Hold Down in 4.6 cm (1-7/8") hole (2) M45 (1-3/4") Grade 8 Fitted Bolts in 4.5 cm (1-3/4") holes (6) M38 (1-1/2") Jacking Bolts in 3.8 cm (1-1/2") holes</p>
<p>Per Class Society: Maximum Deadweight Loading = 0.9N/mm² = 90N/cm² (130 psi) Maximum Total Static Stress = 4.41N/mm² = 441N/cm² (640 psi)</p>	
<p>Initial Calculations:</p> <ul style="list-style-type: none"> • Determine the <i>Total Chock Area</i>. This includes the entire chock area under the machinery mounts. It does not include the overpour areas. NOTE: Dimensions were changed from millimeters to centimeters so the numbers would fit on this page. • Determine the <i>Bolt Hole Area</i>. This is the area taken up by the bolt holes, jacking bolts and anything else that penetrates the chocks. • Determine the <i>Effective Chock Area</i>. This is the actual chock area that supports the equipment. It is obtained by subtracting the Bolt Hole Area from the Total Chock Area. • Convert the weight of the engine from kg to N. • Determine the <i>Actual Deadweight Loading</i>. The Actual Deadweight Loading must not exceed the Maximum Allowed Deadweight Loading. 	<ul style="list-style-type: none"> • Total Chock Area = Quantity x Length x Width (10) x 30 cm x 19.5 cm = 5,850 cm² [(10) x 11.8" x 7.7" = 907 in²] (4) x 32.5 cm x 19.5 cm = 2,535 cm² [(4) x 12.8" x 7.7" = 393 in²] (4) x 35 cm x 19.5 cm = <u>2,730 cm²</u> [(4) x 13.8" x 7.7" = <u>423 in²</u>] 11,115 cm² 1,723 in² • Bolt Hole Area = π x Dia² / 4 (18) M42 - 4.6 cm dia holes = 3.14 x 4.6² / 4 = 299 cm² (46.3 in²) (2) M45 - 4.5 cm dia holes = 3.14 x 4.5² / 4 = 68 cm² (10.5 in²) (6) M38 - 3.8 cm dia holes = 3.14 x 3.8² / 4 = <u>32 cm²</u> (<u>5.0 in²</u>) 399 cm² (61.8 in²) • Effective Chock Area = Total Chock Area – Bolt Hole Area Effective Chock Area = 11,115 cm² – 399 cm² (1,723 in² – 61.8 in²) Effective Chock Area = 10,716 cm² (1,661.2 in²) • 75,000 kg x 9.81 N/kg = 735,750 N (165,347 lbs) • Actual Deadweight Loading = Engine Weight / Effective Chock Area = 735,750 N ÷ 10,716 cm² = 68.7 N/cm² < 70 N/cm² (165,347 lbs / 1,661 in² = 99.5 psi < 130 psi)
<p>Answers to the 6 Questions:</p> <ol style="list-style-type: none"> 1) <i>Minimum Required Chock Area</i> is the smallest amount of chock area that will support the engine adequately. It is found by dividing the Equipment Weight by the Maximum Deadweight Loading (N/cm²) allowed by the class society. 2) Calculate the <i>Total Allowed Bolt Stress</i> by subtracting <i>Actual Deadweight Loading</i> from <i>Maximum Total Static Stress</i>. Now determine the <i>Total Bolt Tension</i> for the calculated amount of chock area by multiplying the <i>Total Allowed Bolt Stress</i> times the <i>Effective Chock Area</i>. This is the Tension on all the bolts. To determine the <i>Tension/Bolt</i>, divide the <i>Total Bolt Tension</i> by the number of hold down bolts. 3) The <i>Total Bolt Tension</i> must be equal or greater than 2.5 times the weight of the equipment to ensure that the machinery will not move. 4) The Tension per bolt must be at least 46.4 N per square mm (6720 psi) of bolt area to ensure the bolts will stay tight. 5) Torque is calculated from the Bolt Tension and Bolt Diameter using one of the formulas in Paragraph 7 above. 6) Calculate the Amount of Chockfast Required by first calculating the volume of each chock. Then calculate the volume of the overpour areas. Add these two volumes together and multiply by 1.1 to add 10% to the total to account for waste, spills, etc. Finally divide the total volume by the volume of a unit of Chockfast to determine the number of units required. 	<ol style="list-style-type: none"> 1) Minimum Required Chock Area = 735,750 N / 70 N/cm² = 10,511 cm² Because the Effective Chock Area (10,716 cm²), is larger than the minimum required chock area (10,522 cm²), the chocks do not have to be modified. If there wasn't enough area, the size of the chocks would have to be increased. 2) Total Allowed Bolt Stress = 441N/cm² – 68.7 N/cm² = 372.3 N/cm². This means the chocks can be loaded up to 372.3 N/cm² as a result of bolt stress created by tension on the mounting bolts. Total Bolt Tension = 372.3 N/cm² x 10,716 cm² = 2,917,967 N. This is the sum of all bolt tensions on the chocks. Tension/Bolt = 2,917,967 N / 20 Hold down bolts = 145,898 N. 3) The engine weighs 725,750 N. 2.5 x 725,750 N = 1,814,375 N. Total Bolt Tension is 2,917,967 N. Therefore, there is adequate bolt tension to make sure the engine will not move. 4) The Bolt Area = (π x Dia²) / 4 = (3.14 x 42²) / 4 = 1,385 mm² Bolt Tension per square mm = 145,898 N / 1,385 mm² = 105 N / mm². Because the Bolt tension per mm² is larger than 46.4 N/mm² the bolts will stay tight. 5) Torque (N.m) = (0.2 x Tension (N) x Bolt Dia (mm)) / 1000. Torque = (0.2 x 145,898 N x 42 mm) / 1000 = 1,226 N.m 6) Effective Chock Area = 10,716 cm² (1,661.2 in²) Chock Volume = 10,716 cm² x 3.5 cm thick = 37,506 cm³ (2,289 in³) Overpour Volume = Quantity x Chock Length x Overpour Width (1.2 cm average) x Overpour Depth (1.2 cm + Thickness of chock) (10) x 30 cm x 1.2 cm x 3.7 cm = 1,332 cm³ (4) x 32.5 cm x 1.2 cm x 3.7 cm = 577 cm³ (4) x 35 cm x 1.2 cm x 3.7 cm = <u>622 cm³</u> Overpour Volume = 2,531 cm³ Total Volume = Chock Volume + Overpour Volume Total Volume = 37,506 cm³ + 2,531 cm³ = 40,037 cm³ Add 10% for waste, spillage, etc. = 40,037 cm³ x 1.1 = 44,041 cm³ Number of 3.5 kg Units = 44,041 cm³ / 1,966 cm³ / unit = 23 units Number of 6.8 kg Units = 44,041 cm³ / 4,261 cm³ / unit = 11 units

INSTRUCTIONS FOR INSTALLING CHOCKFAST

The following instructions apply to standard Chockfast installations on steel foundations where the chock thickness is within the range specified in **Table 1: Standard Thickness of Chockfast Pours**. Outside this range, please contact the local representative of the Worldwide Distributor Network or ITW Performance Polymers.

I. Materials Required

The following materials are required to effectively install Chockfast chocks. Assemble all materials prior to starting any work.

- 1) Chockfast: From the Chocking Plan, calculate the amount of Chockfast required based on the following pre-packed units:

Table 5: Unit Sizes

Material	Units	Volume
Chockfast Orange	3.4 kg (7.5 lbs)	1,966 cm ³ (120 in ³)
	6.8 kg (15 lbs)	4,261 cm ³ (260 in ³)
Chockfast Gray	5 kg (11 lbs)	3,064 cm ³ (187 in ³)
	21.8 kg (48 lbs)	13,372 cm ³ (816 in ³)

Always have an extra 10% to 15% available for chock thickness variation, waste, accidental loss, etc.

2) Damming Materials:

- a) Flexible damming material such as open cell foam.
- b) Metal front dam.
- c) Putty, sealing or caulking compounds.
- d) Contact adhesive for gluing foam sections together.

3) ITW Release Agent.

4) Non-melt grease.

5) Variable –speed, heavy-duty electric hand drill capable of operating at speeds up to 200 rpm.

6) Jiffy mixing blade.

7) Surface thermometer.

8) Safety glasses or face shield.

9) Slitting knife

10) Hacksaw blade for cutting foam damming material.

11) Protective rubber gloves.

12) Epoxy solvent for cleanup. IMPAX IXT-59 or equal.

13) Plastic sheet or cardboard on which to mix the Chockfast.

II. Preparations

- 1) Please refer to the relevant Safety Data Sheet for specific guidance on recommended Personal Protective Equipment (PPE). These may be found by visiting Chockfast website (www.chockfast.com) or by contacting the local member of the worldwide distributor network.
- 2) Create a Chocking Plan for the particular piece of machinery. Utilize the machinery manufacturer's mounting requirements and perform all the necessary calculations related to chock size and hold down bolt torque and tension. Determine exactly where the chocks will be positioned and what size they will be. Assemble all materials required by the plan. If necessary, have the Chocking Plan approved by the governing classification society prior to starting any work.


- 3) If the steel temperature is below 13°C (55°F), have suffi-

- cient heaters available to raise it above 15°C (60°F).
- 4) Store the resin and hardener at 20°C to 25°C (68°F to 77°F) for at least 12 hours but preferably 24 hours prior to use. This ensures the best mixing and pouring viscosity and the longest working time.
- 5) Round all corners and edges that may penetrate the Chockfast.
- 6) Align the machinery and pour the Chockfast with the vessel afloat. If alignment is critical, an adjustment should be made in the alignment to compensate for a slight settling that may occur of approximately 0.001cm per 1.0 cm (0.001 inch per 1 inch) of chock height.
- 7) Drill all bolt holes from the equipment bedplate down through the foundation as required by the equipment manufacturer.
- 8) Clean all surfaces that will come in contact with the Chockfast. Surfaces should be free from oil, grease, water, rust, burrs, slag and loose paint. A thin coat of primer is acceptable.


III. Damming

The picture sequence below shows the general procedure for damming a mounting foot. Each installation will be different so follow the dimensions shown on the Chocking Plan for the particular piece of equipment.

- 1) Trim the foam damming material to the proper height allowing for a 6 mm (1/4 in) compression on the foam. (A bare hacksaw blade works best for this.) This amount of crush will allow for easy foam installation but still hold the foam firmly in place. When a closed cell foam is used such as neoprene, air vent tubes must be glued intermittently along the top of the foam to allow the air to escape.

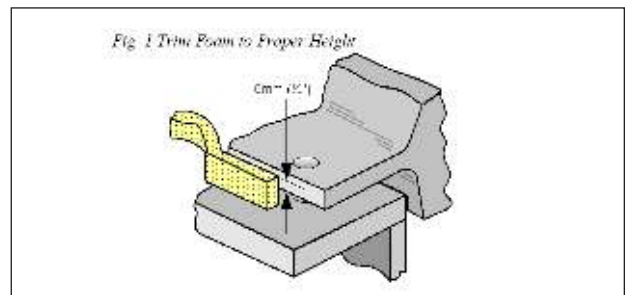


- 2) Insert the damming material under the equipment mounting plate and around the hold down bolts and jacking screws as described on the Chocking Plan. The foam damming material must be located on three sides of the chocks.

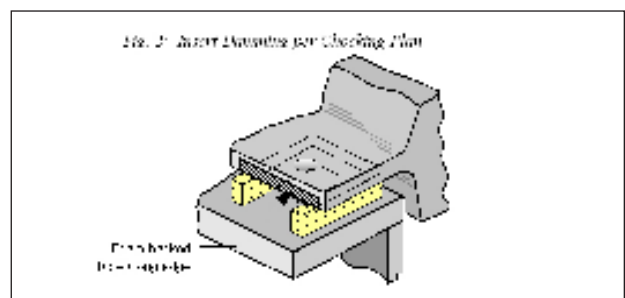


- 3) Seal the hold down bolts and bolt holes so they do not


leak. If the hold down bolts are removed, insert tight-fitting wooden dowels or Armaflex tubing into the holes. If the bolts are left in place, hand-tighten the nuts and wrap the bolt shank with Armaflex tubing. Coat whatever is used to core the hole with a heavy coating of non-melt grease.

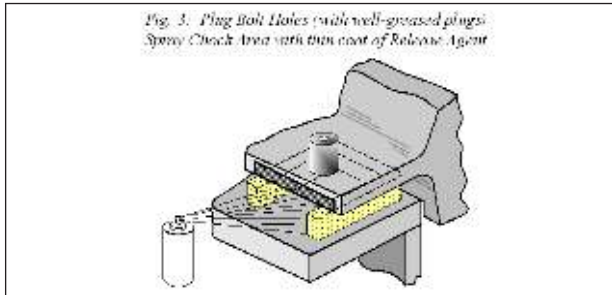


- 4) Fitted bolts should be sprayed with ITW Release Agent and installed.

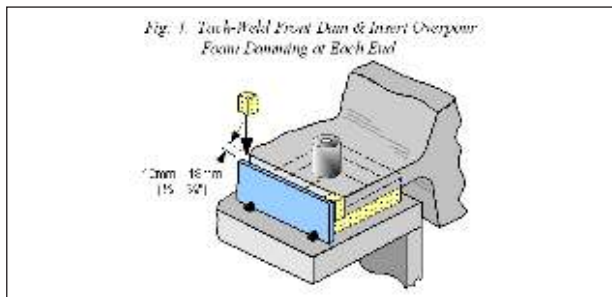

- 5) With the side dams in place and the bolt holes filled and coated, spray the chock area with Release Agent. See Fig. 3.

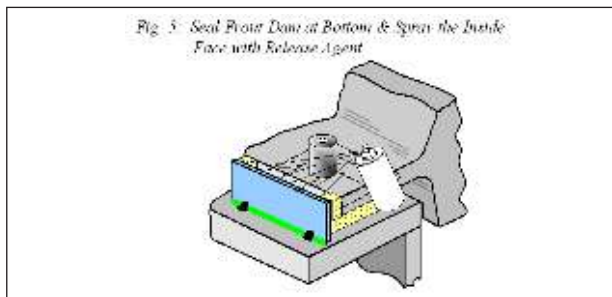


- 6) Install a front metal dam so that the width and height will be within the limits shown in the drawing below. Install by gluing in place, small pieces of foam to allow the Chockfast to be poured higher than the bottom of the mounting foot. The overpour area is very important as it provides both head pressure to the underside of the mounting foot and a pool of molten Chockfast to feed the chock area if needed. See Fig. 4.

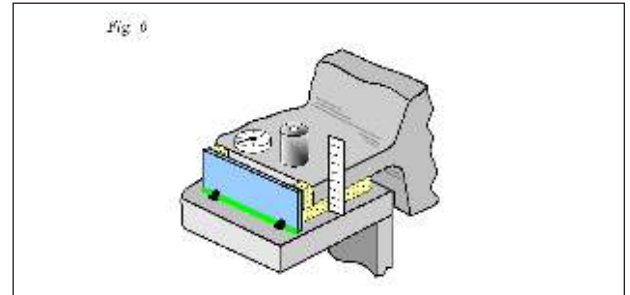

- 7) Make sure all potential leak points are well sealed. It is much easier to prevent leaks before the resin is poured in than to stop them afterwards.



- 8) Spray the inside of the front metal dam with Release Agent so that it can easily be removed after the Chockfast hardens. See Fig. 5.

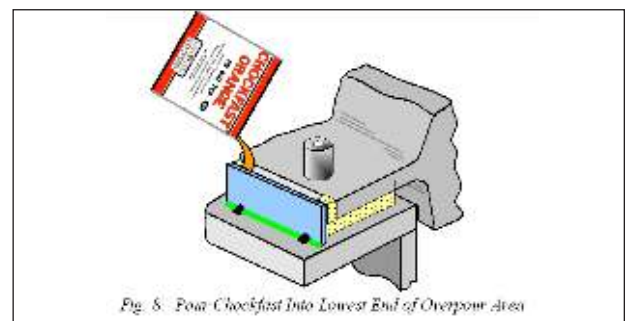

IV Mixing And Pouring Chockfast


- 1) Ensure that the damming completely surrounds the chock area and that there are no potential leak points.
- 2) Measure the chock thickness of each chock and the temperature of the engine bed and foundation. For Chockfast Orange only, determine based on the graph in Fig. 9, how much hardener to use. The amount is based on machinery foundation temperature and the thickness of the chock. See Fig. 6.
- 3) Bring out the resin and hardener from storage.
- 4) Installing Chockfast is usually a team effort.
 - Assign someone to each of the following jobs:
 - a) open the boxes of Chockfast for the mixers,
 - b) add the hardener and time the mixing
 - c) mix the Chockfast,
 - d) pour the Chockfast and inspect for leaks. Make sure each member of the team knows their job and have a backup plan if any of the mixing equipment should fail.
- 5) Make sure everyone working with Chockfast puts on gloves and eye protection.
- 6) Add hardener to the resin as needed. Power mix at about 200 RPM (never more than 500 RPM) for 3 minutes using a Jiffy Mixing blade or equal. The mixer should be comfortably seated to hold the can of Chockfast securely between the feet. Keep the blade submerged at all times and traverse the entire can. Make sure the bottom of the can is scoured. See Fig. 7.

V After Pouring

- 1) Pour the resin as soon as possible after mixing. Do not scrape the residue from the can sides or bottom. Always pour from the lowest corner of the chock. Fill from a single point only so that air can escape during filling. Pour as high above the chock as possible so that there is a thin ribbon of Chockfast going into the chock. This forces any trapped air out of the liquid.
- 2) In order for Chockfast to cure, the temperature should be at least 13°C (55°F). Use heaters as necessary to bring the entire chocking area up to at least this temperature. Localized heating of the chock areas is not preferred. Length of cure will depend on temperature as follows:

13°C–18°C (55°F–65°F)	48 hours
19°C–21°C (66°F–70°F)	24 hours
Above 21°C (70°F)	18 hours
- 3) When curing is complete, remove heaters and allow the Chockfast to return to ambient temperature before loading.
- 4) Release the jack screws, alignment wedges or other alignment support devices.
- 5) Remove the front dams and grind off the sharp edges of the overpour.
- 6) Tighten the hold down bolts to the desired tension.

Fig.9 Hardener Ratio Guide

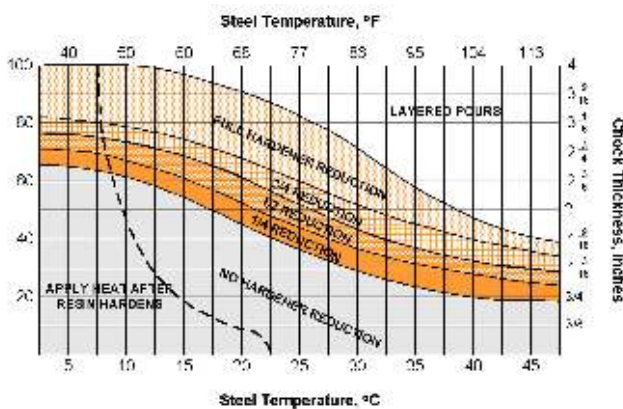

General: Every reasonable effort is made to insure the technical information and recommendations on these data pages are true and accurate to the best of our knowledge at the date of issuance. However, this information is subject to change without notice. Prior versions of this publication are invalid with the release of this version. Products and information are intended for use by qualified applicators that have the required background, technical knowledge, and equipment to perform said tasks in a satisfactory manner. Consult your local distributor for product availability, additional product information, and technical support. **Warranty:** ITW Performance Polymers, a division of Illinois Tool Works Inc., warrants that its products meet their printed specifications. This is the sole warranty. This warranty expires one year after product shipment. **Warranty Claims:** If any product fails to meet the above, ITW Performance Polymers will, at its option, either replace the product or refund the purchase price. ITW Performance Polymers will have no other liability for breach of warranty, negligence, or otherwise. All warranty claims must be made in writing within one year of the date of shipment. No other claims will be considered. **Disclaimer:** ITW Performance Polymers makes no other warranty, expressed or implied, and specifically disclaims any warranty of merchantability or fitness for a particular purpose. Suggestions concerning the use of products are not warranties. The purchaser assumes the responsibility for determining suitability of products and appropriate use. ITW Performance Polymers' sole liability, for breach of warranty, negligence or otherwise, shall be the replacement of product or refund of the purchase price, at ITW Performance Polymers' election. Under no circumstances shall ITW Performance Polymers be liable for any indirect, incidental or consequential damages. **Modification of Warranty:** No distributor or sales representative has the authority to change the above provisions. No change in the above provisions will be valid unless in writing and signed by an officer or the Technical Director of ITW Performance Polymers. No term of any purchase order shall serve to modify any provision of this document. **Mediation and Arbitration:** If any dispute arises relating to products or product warranties, either the purchaser or ITW Performance Polymers may a) initiate mediation under the then current Center for Public Resources (CPR) Model Procedure for Mediation of Business Disputes, or b) initiate a non-binding arbitration under the rules of the American Arbitration Association for the resolution of commercial disputes.

ITW PERFORMANCE POLYMERS

130 Commerce Drive | Montgomeryville | PA 18936 | USA | T: 215-855-8450 | E-mail: customerservice.na@itwpp.com | www.itwperformancepolymers.com